


# CATALOG OF CORE PRODUCTS

VALUE-DRIVEN SOLUTIONS TO MEET INDUSTRY NEEDS



Mechanical Seals



Packing and Gaskets



Polymer Seals



Industrial Lubricants  
and MRO Products



ARC Industrial  
Coatings

# Innovative Products and Custom Solutions

A.W. Chesterton Company is a leading international manufacturer and distributor of mechanical seals, packing and gaskets, polymer seals, industrial lubricants, and MRO products, as well as ARC industrial coatings. Each product line is positioned to provide value-driven solutions to meet industry needs.

Since 1884 we have worked closely with our customers to provide solutions that help them operate more reliably, efficiently, and economically.

*A.W. Chesterton Company is ISO 9001/2008 and ISO 14001/2004.*

## Value-Driven Solutions

Chesterton uses high performance materials, formulations, and designs to solve your toughest industrial applications. We provide value-driven solutions with documented success and recognition across the globe.

## Local Service

The expertise of your local Chesterton® Technical Specialist combined with the support of our engineering staff will enable you to enjoy significantly reduced operating costs, increased reliability, and years of trouble-free service.

*This catalog provides you with an overview of the products and services that Chesterton offers. For more information about our full range of products and services, visit our website at [chesterton.com](http://chesterton.com).*





# TABLE OF CONTENTS

## MECHANICAL SEALS

Product Selection Guide.....	4
<b>Split Seals</b>	
442™ .....	5
442C™ .....	6
<b>Cartridge Seals</b>	
1810 .....	7
2810 .....	8
180™ .....	9
280™ .....	9
<b>Cassette Seals</b>	
510 .....	10
520 .....	10
<b>Gas Seals</b>	
4400 .....	11
<b>Slurry Seals</b>	
170 .....	11
<b>Seal Support Systems</b>	
SpiralTrac® .....	12
Intelli-Flow™ HT .....	12
Buffer Support System Tank .....	13
Pressurized Support System Tank .....	13
Water Support System Tank .....	13

## EQUIPMENT MONITORING

Chesterton Connect™ .....	14
Chesterton Connect™ Cloud .....	15

## PACKING AND GASKETS

Product Selection Guide .....	16
<b>Pump, Mixer, and Agitator Packing</b>	
DualPac® 2211 and 2212 .....	17
370 .....	18
425 .....	18
477-1 .....	19
1725A .....	19
1730 .....	20
1730SC .....	20
1760 .....	21
1830-SSP .....	21
CMS 2000 .....	22
Stabilizer Cage .....	22
SuperSet™ .....	22
<b>Valve Packing</b>	
1622™ .....	23
GraphMax™ .....	24
477-1 .....	19
1724™ .....	24
1600 .....	25
1601 .....	25
5800/5800E .....	26
<b>Valve Live Loading</b>	
Cartridge Live Loading .....	26
5150 .....	26
5300 .....	26
5100 .....	26
<b>Gasket and Flange Sealing</b>	
<b>Flange Live Loading</b>	
5500 .....	27
5505H .....	27
Manway Sealing .....	27
<b>Sheet Gaskets</b>	
457 .....	28
459 .....	28
ECS-T .....	28
<b>Semi-Metal Gaskets</b>	
Steel Trap™ .....	29
Camprofile .....	29
Spiral Wound .....	29

## POLYMER SEALS

Product Selection Guide .....	30 – 31
<b>Hydraulic and Pneumatic Seals</b>	
<b>Stacked Seals</b>	
27K .....	31
11K .....	32
<b>U-Cup Seals</b>	
22KN .....	33
22K .....	33
23K .....	34
<b>Compression Seals</b>	
20K™ .....	34
Custom Cap Seals (CCS) .....	35
<b>Wiper Seals</b>	
W21K .....	35
WCCS .....	36
<b>Bearing Components</b>	
16K and 17K .....	36
18K and 19K .....	37
WR .....	37
<b>Anti-Extrusion Rings</b>	
9K .....	38
<b>Rotary Seals</b>	
<b>Bearing and Gearbox Protection</b>	
33K .....	38
30K .....	39
Polymer Labyrinth Seal (PLS) .....	40
<b>Stuffing Box Solutions</b>	
14K .....	40
30KC .....	41
<b>Spring Energized Seals</b>	
SES 100 Series .....	42
SES 200 Series .....	42
SES 300 Series .....	43
SES 500 Series .....	43

## INDUSTRIAL LUBRICANTS AND MRO PRODUCTS

<b>Oils and Greases</b>	
Product Selection Guides .....	44
<b>Industrial Oils</b>	
610 Plus .....	45
610 MT Plus .....	45
610 HT .....	45
601 .....	47
650 AML .....	46
652 .....	47
690 FG .....	47
715 .....	49
715 Gold .....	49
720 Chain, Cable, Gear Lubricant (CCG) .....	48
<b>Industrial Greases</b>	
613 .....	49
615 HTG #1 .....	49
615 HTG #2 .....	49
615 HTG #2-460 .....	49
625 CXF .....	50
630 SXCF .....	50
630 SXCF 220 #1 .....	50
635 SXC .....	50
<b>Anti-Seizes</b>	
725 .....	51
772 .....	51
783 ACR .....	51
785/785 FG .....	52
<b>Maintenance Specialties</b>	
390 .....	52
723/723 FG Sprasolvo™ .....	52
730 Spragrip® .....	53
740 and 775 .....	53

## INDUSTRIAL LUBRICANTS AND MRO PRODUCTS (CONT.)

<b>Maintenance Specialties (cont.)</b>	
752 .....	53
763 Rust Transformer® .....	54
800 GoldEnd® Tape .....	54
860 .....	55
900 GoldEnd® Paste .....	54
<b>Cleaners and Degreasers</b>	
Cleaners and Degreasers	
Product Selection Guide .....	56
274 .....	56
276 .....	57
279 PCS .....	57
292 PDS/294 CSD .....	57
296 .....	58
803 .....	58
KPC 820/820N .....	58
<b>Automatic Lubricant Dispensers</b>	
Lubri-Cup™ EM .....	59
Lubri-Cup™ OL 500 .....	59
Lubri-Cup™ VG .....	60
Lubri-Cup™ VG Mini .....	60
Lubri-Cup Products—Featured Summary .....	61

## ARC INDUSTRIAL COATINGS

Product Application Guide .....	62
<b>Erosion Resistant Coatings for Metals</b>	
858 .....	63
HT-S .....	63
<b>Coatings for Corrosion, Erosion, and Chemical Attack for Metal</b>	
S5 .....	64
S4+ .....	64
S2 .....	65
S1PW .....	66
S1HB .....	66
SD4i .....	67
<b>Abrasion Resistant Composites for Metal</b>	
BX5 .....	68
I BX1 .....	69
I BX1 RC .....	69
BX1 .....	70
BX2 .....	70
MX1 .....	71
MX2 .....	71
MX FG .....	72
<b>Resurfacing Coatings for Concrete</b>	
EG-1 .....	72
791 .....	73
988 .....	74
<b>Thin Film Composites for Concrete</b>	
797 .....	74
CS2 .....	75
CS4 .....	76

## ORDERING AND CERTIFICATION INFORMATION

<b>Ordering Information</b>	
ARC .....	77 – 78
Mechanical Seals .....	79
Packing and Gaskets .....	80 – 87
IL/MRO Products .....	88 – 89
Polymer Seals .....	90
<b>Certifications</b>	
Mechanical Seals .....	90
Packing and Gaskets .....	90 – 91
Polymer Seals .....	91
ARC .....	91
IL/MRO Products .....	92 – 93

# Mechanical Seals Product Selection Guide

Please contact your local Chesterton Representative to help you select the best product for your application.

Family	Product	Equipment Type	Fit			Duty						
			ISO-3069-S	ISO-3069-C	ASME B73.1 and 73.2	Light Duty	Large Equipment	Solids	Crystallizing Media	Emissions Control	Corrosive Media	High Temperature
<b>Split Seals</b> Why disassemble the equipment? Chesterton's split mechanical seals offer a reliable sealing solution —reducing maintenance costs for larger equipment that is difficult and time-consuming to disassemble.	442™ and 442C™	Pumps, Agitators, and Mixers	✓		✓	✓+	✓++	✓+*	✓		✓	✓
	1810	Pumps		✓	✓	✓	✓+	✓+	✓+		✓+	
<b>Cartridge Seals</b> Cartridge Seals have been designed to be rugged performers in sealing applications across industry segments. They are proven performers for plant-wide standardization, providing maximum reliability.	2810	Pumps		✓	✓			✓+	✓++	✓++	✓++	✓++
	180™	Pumps		✓	✓	✓+	✓	✓	✓		✓	
	280™	Pumps Reactors	✓	✓	✓		✓+	✓+	✓++	✓++	✓+	✓++
<b>Cassette Seals</b> All the wearing parts are contained in a single, replaceable cassette unit. Single and double cassettes share a common, universal gland. Repair becomes a matter of exchanging cassettes, making it faster and easier while significantly reducing costs associated with repair.	S10	Pumps	✓	✓	✓	✓+	✓	✓	✓+		✓+	✓
	S20	Pumps	✓	✓	✓		✓	✓+	✓+	✓++	✓+	✓++
<b>Gas Seals</b> Chesterton gas seal technology overcomes performance limitations common to double liquid cartridge seals. Reach your plant reliability goals with the addition of simple gas seal technology.	4400	Pumps	✓	✓	✓		✓			✓++	✓	✓++
<b>Slurry Seals</b> A unique, non-clog design extends the life of a slurry pumps in tough slurry sealing applications.	170	Pumps		✓	✓		✓+	✓++	✓+		✓+	
<b>Seal Support Systems</b> Improve seal performance levels by enhancing the environment in which they operate. These products help meet your operation's MTBR goals.	Spiral-Trac®	Pumps, Agitators, and Mixers	✓	✓	✓	✓+	✓++	✓+	✓		✓	✓
	Intelli-Flow™	Pumps, Agitators, and Mixers				✓	✓	✓	✓	✓	✓	✓
	BSS Tank	Pumps, Agitators, and Mixers	Double Seal Support System									
	PSS Tank											
	WSS Tank											

\*Solids handling capabilities enhanced by use of SpiralTrac split environmental controller.

✓++ = Best Choice
✓+ = Better Choice
✓ = Good Choice



SPLIT SEALS


# 442™

## Split Mechanical Seal


*Eliminates the need for equipment disassembly during seal installation and reduces maintenance costs*

The 442 split seal is ideal for equipment that is difficult and time-consuming to disassemble, such as large pumps, vertical pumps, and horizontal split case pumps. This proven, compact design can be used in a wide variety of equipment and process fluids.

The high performance split technology allows the 442 to operate from vacuum to high pressures. Its compact design allows for easy installation and a fit advantage on most equipment. Split, low-cost repair kits reduce ongoing maintenance costs even further. Designed with the installer in mind, the ball-and-socket O-Rings provide a quick and easy seal without the use of adhesives. Captive screws cannot fall out, making installation straightforward and reliable.

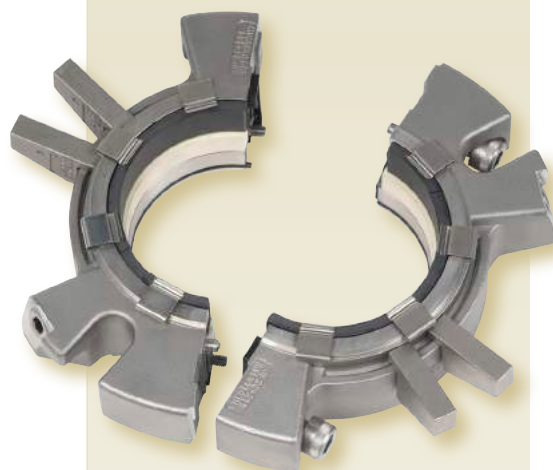

- Easy and fast to install without equipment disassembly
- Proven design with superior performance
- Non-fretting to equipment
- Compact design
- Minimal to no leakage

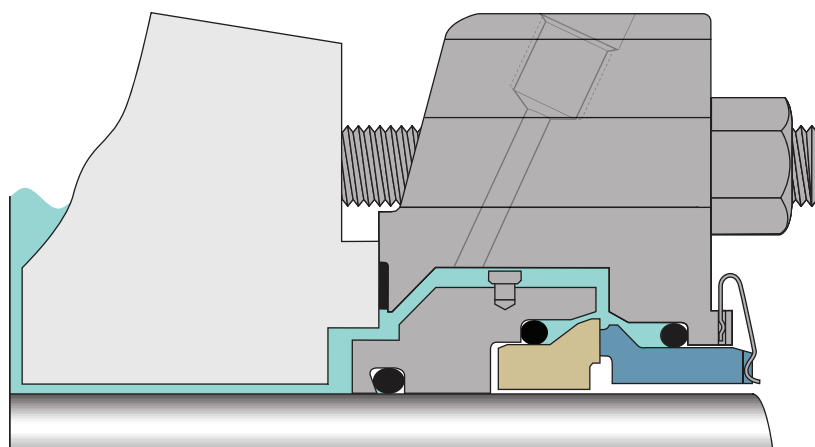

Operating Conditions		Materials	
Size	20 mm – 990 mm (0.750" – 39.000")	Faces	CB, RSC, CR
Pressure	711 mm (28") Hg Vacuum – 30 bar g (450 psig)*	Elastomers	FKM, EPDM, FEPM
Temperature	120°C (250°F)	Metals	EN 1.4401 (316SS)
Speed	20 m/s (4000 fpm)	Springs	Elgiloy®

Standards and Approvals: ISO-3069-S, ASME B73.1, ASME B73.2, NSF61, ACS, ATEX

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

SPLIT SEALS

# 442C™

## Cartridge Mechanical Split Seal


### Enhanced Design for Simple Installation and Greater Sealing Reliability

The Chesterton 442C Cartridge Split Seal combines superior seal performance with the ease of installation of a cartridge seal. Our split seal technology addresses the inherent limitations found in conventional cartridge split seal designs by minimizing installation complications and excessive leakage. As with all split seals, it offers easy installation and replacement without the need for teardowns.

The 442C design also offers maximum installation flexibility with its short axial length and flexible gland positioning. It simplifies split mechanical seal repair by using a standard spare parts kit, enabling you to lower your inventory costs to maintain operations.



- Simplified split seal installation—without equipment disassembly
- Innovative design with superior performance
- Fits most rotating equipment
- Easy field repair

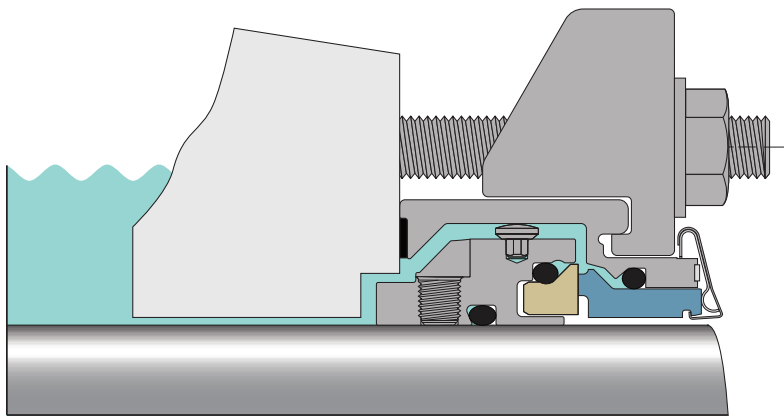

Operating Conditions		Materials	
<b>Size</b>	25 mm – 120 mm (1.000" – 4.750") Extra Large: 125 mm – 195 mm (4.875" – 7.750")	<b>Faces</b>	CB, RSC, CR
<b>Pressure</b>	711 mm (28") Hg Vacuum – 30 bar g (450 psig)*	<b>Elastomers</b>	FKM, EPDM, FEPM, FFKM
<b>Temperature</b>	120°C (250°F)	<b>Metals</b>	EN 1.4401 (316SS)
<b>Speed</b>	20 m/s (4000 fpm)	<b>Springs</b>	Elgiloy®

Standards and Approvals: ISO-3069-S, ASME B73.1, ASME B73.2, NSF-61

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS



# 1810

## Heavy-Duty Modular Single Cartridge Seal

**Built on Chesterton's AXIUS™ modular platform for simple configuration and installation plant-wide**

This Chesterton® single cartridge seal offers you the ultimate in seal quality, flexibility, and convenience. Leveraging Chesterton's proprietary AXIUS modular platform, the 1810 can be configured with several different face profiles and auxiliary components which allows performance to be tailored to a wide range of process conditions.

A plant-wide sealing solution, the 1810 is effective for both simple and highly demanding applications. It offers selectable features around a common gland housing. This flexibility allows for the creation of the best sealing parameters for your equipment and application needs to maximize single seal reliability.

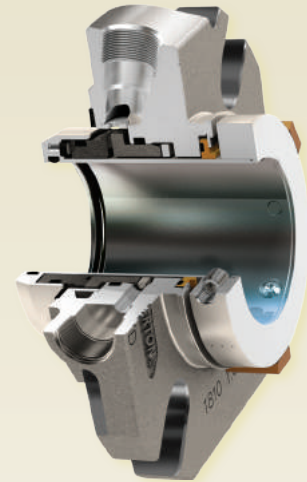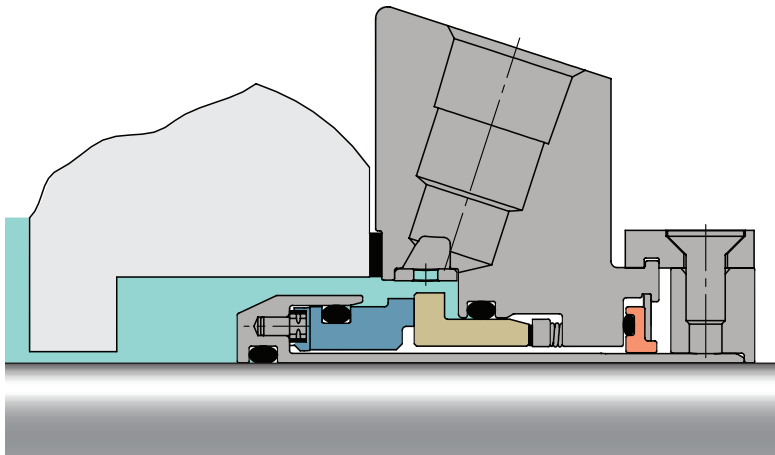

- Simplifies configuration and maximizes seal performance with the AXIUS™ modular platform
- Maintains reliability throughout temperature cycling and stop/start processes with monolithic seal faces
- Increases face life and reduces contact stress with cushioned drive pins
- Allows for easy, positive seal identification with ViewIn™ technology



Operating Conditions		Materials	
Size	25 mm – 200 mm (1.000" – 8.000")	Faces	CB, SSC, TC
Pressure	711 mm (28") Hg Vacuum – 40 bar g (600 psig)*	Elastomers	FKM, EPDM, FEPM, FFKM
Temperature	-55°C – 300°C (-67°F – 570°F)	Metals	EN 1.4401 (316SS)
Speed	25 m/s (5000 fpm)	Springs	EN 2.4819 (Alloy C-276)

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, NSF-61

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.



## CARTRIDGE SEALS



# 2810

## Heavy-Duty Modular Double Cartridge Seal

***Built on Chesterton's AXIUS™ modular platform for simple configuration and emission control plant-wide***

This Chesterton double cartridge seal offers you the ultimate in seal quality, flexibility, and emissions control. Leveraging Chesterton's proprietary AXIUS modular platform, the 2810 can be configured with several different face profiles and auxiliary components within a common gland housing. This flexibility allows seal performance to be tailored to a wide range of process conditions.

A plant-wide sealing solution, the 2810 uses a geometric double-balanced seal face design. An optimized barrier/buffer channel for enhanced fluid flow provides greater seal reliability even at elevated temperatures.

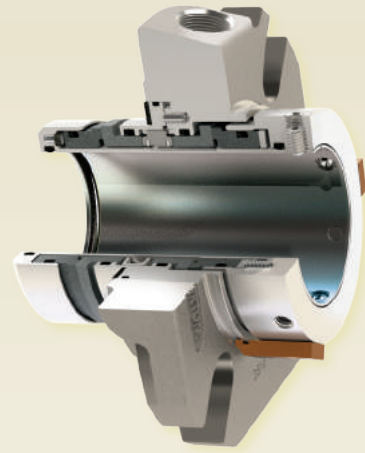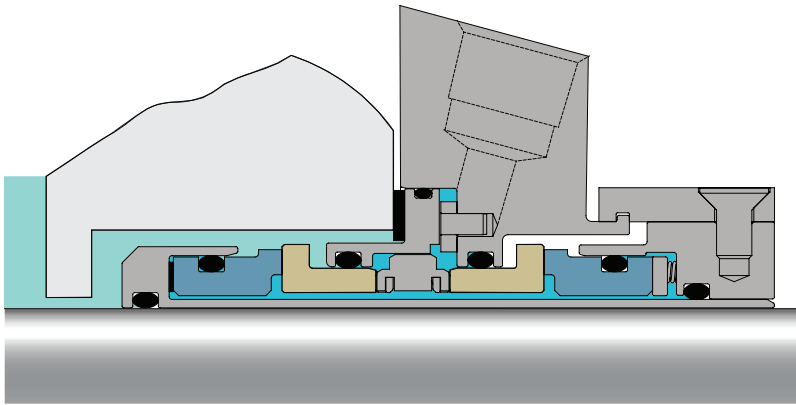

- Simplifies configuration and maximizes seal performance with the AXIUS™ modular platform
- Maintains reliability throughout temperature cycling and stop/start processes with monolithic seal faces
- Increases face life and reduces contact stress with cushioned drive pins
- Accommodates axial, radial, and angular shaft movement through unified seal face alignment
- Allows for easy, positive seal identification with ViewIn™ technology



Operating Conditions		Materials	
Size	25 mm – 200 mm (1.000" – 8.000")	Faces	CB, SSC, TC
Pressure	711 mm (28") Hg Vacuum – 40 bar g (600 psig)*	Elastomers	FKM, EPDM, FEPM, FFKM
Temperature	-55°C – 300°C (-67°F – 570°F)	Metals	EN 1.4401 (316SS)
Speed	25 m/s (5000 fpm)	Springs	EN 2.4819 (Alloy C-276)

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, ATEX



\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

CARTRIDGE SEALS

# 180™

## Heavy-Duty Single Cartridge Seal

A heavy-duty single cartridge seal for maximum reliability in demanding applications.

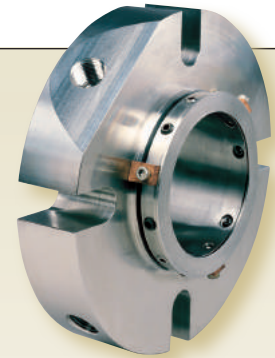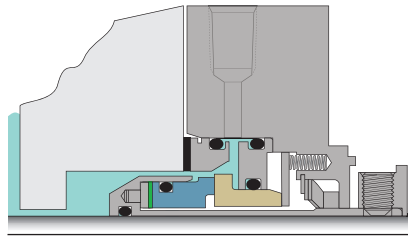

Operating Conditions		Materials	
<b>Size</b>	25 mm – 120 mm (1.000" – 4.750")	<b>Faces</b>	CB, SSC, TC
<b>Pressure</b>	711 mm (28") Hg Vacuum – 40 bar g (600 psig)*	<b>Elastomers</b>	FKM, EPDM, FEPM, FFKM
<b>Temperature</b>	-55°C – 300°C (-67°F – 570°F)	<b>Metals</b>	EN 1.4401 (316SS)
<b>Speed</b>	25 m/s (5000 fpm)	<b>Springs</b>	EN 2.4819 (Alloy C-276)

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, NSF61



\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

- Maximum performance for demanding, high-torque applications
- Reliable sealing of slurries

# 280™

## Heavy-Duty Cartridge Double Seal

A double seal design for severe duty and greatest reliability in difficult applications—including mixers and agitators.

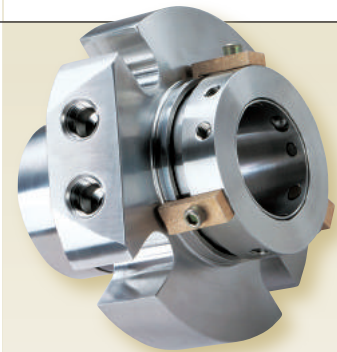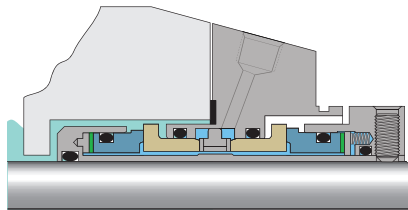

Operating Conditions		Materials	
<b>Size</b>	25 mm – 120 mm (1.000" – 4.750")	<b>Faces</b>	CB, SSC, TC
<b>Pressure</b>	711 mm (28") Hg Vacuum – 40 bar g (600 psig)* 17 bar g (250 psig) outboard*	<b>Elastomers</b>	FKM, EPDM, FEPM, FFKM
<b>Temperature</b>	-55°C – 300°C (-67°F – 570°F)	<b>Metals</b>	EN 1.4401 (316SS)
<b>Speed</b>	20 m/s (4000 fpm)	<b>Springs</b>	EN 2.4819 (Alloy C-276)

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, ATEX

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.


- High-reliability sealing
- Maximum solids handling capability
- Superior performance for demanding applications
- Motion tolerant for mixer applications

CASSETTE SEALS

# S10

## High Performance Single Cassette Seal

A unique, modular cassette that combines advanced seal technology with flexibility in maintenance and repair.

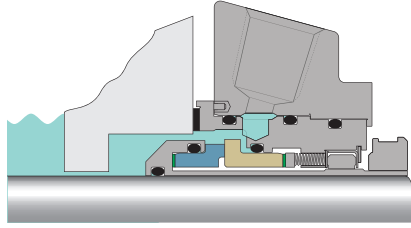

One optimized sealing concept for plant-wide standardization

- ViewIn™ enabled RFID seal tracking technology which identifies the serial number
- Full-featured universal gland with quench/drain and multi-port flush
- Quick to repair with innovative cassette feature

Operating Conditions		Materials	
Size	25 mm – 120 mm (1.000" – 4.750")	Faces	CB, SSC, TC
Pressure	711 mm (28") Hg Vacuum – 31 bar g (450 psig)*	Elastomers	FKM, EPDM, FEPM, FFKM
Temperature	-55°C – 300°C (-67°F – 570°F)	Metals	EN 1.4401 (316SS)
Speed	25 m/s (5000 fpm)	Springs	EN 2.4819 (Alloy C-276)



Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2, NSF61

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

# S20

## High Performance Double Cassette Seal

A unique, modular cassette that combines advanced seal technology with flexibility in maintenance and repair.

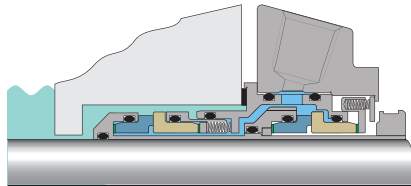

One optimized sealing concept for plant-wide standardization

- ViewIn™ enabled RFID seal tracking technology which identifies the serial number
- Quick to repair with innovative cassette feature

Operating Conditions		Materials	
Size	25 mm – 120 mm (1.000" – 4.750")	Faces	CB, SSC, TC
Pressure	711 mm (28") Hg Vacuum – 31 bar g (450 psig)* 17 bar g (250 psig) inboard differential*	Elastomers	FKM, EPDM, FEPM, FFKM
Temperature	-55°C – 300°C (-67°F – 570°F)	Metals	EN 1.4401 (316SS)
Speed	25 m/s (5000 fpm)	Springs	EN 2.4819 (Alloy C-276)

Standards and Approvals: ISO-3069C, ASME B73.1, ASME B73.2

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.




GAS SEALS

# 4400

## Double Concentric Gas Seal

Advanced technology made simple in a gas seal design. The 4400 is a seal for all purposes and provides for an easy gas seal upgrade option. It is an ideal choice for upgrading under-performing, liquid lubricated seals to high performance, non-contacting operation.

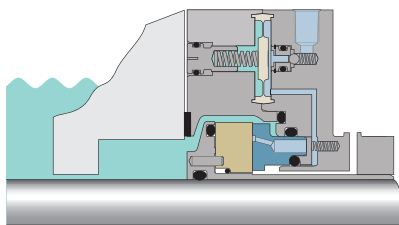

Operating Conditions		Materials	
Size	25 mm – 90 mm (1.000" – 3.625")	Faces	CB, SSC
Pressure	711 mm (28") Hg Vacuum – 20 bar g (300 psig)*	Elastomers	FKM, EPDM, FEPM, FFKM
Temperature	-55°C – 300°C (-67°F – 570°F)	Metals	EN 1.4401 (316SS)
Speed	8 m/s (1500 fpm), 25 m/s (5000 fpm)	Springs	EN 2.4819 (Alloy C-276)

Standards and Approvals: ISO-3069, ASME B73.1, ASME B73.2, ACS

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.



- Delivers low cost-of-ownership for a broad range of applications
- Advanced technology that is easy to install and operate
- Exclusive In-Gland Control System eliminates the need and expense of an external gas panel
- Eliminates atmospheric emissions

SLURRY SEALS

# 170

## Slurry Single Cartridge Seal

Engineered to operate in harsh, heavy consistency slurry environments and to eliminate costly external seal flushes in the majority of applications.

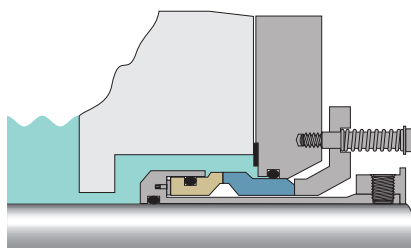

Operating Conditions		Materials	
Size	25 mm – 228 mm (1.000" – 9.000")	Faces	SSC, TC
Pressure	711 mm (28") Hg Vacuum – 17 bar g (250 psig)*	Elastomers	FKM, EPDM, FEPM, FFKM
Temperature	-55°C – 300°C (-67°F – 570°F)	Metals	EN 1.4401 (316SS)
Speed	11 m/s (2200 fpm)	Springs	EN 2.4819 (Alloy C-276)

\* Seal pressure capabilities are dependent on the fluid sealed, temperature, speed, and seal face combinations. For operation outside the limits and additional materials consult Chesterton Mechanical Seal Engineering.

- Runs longer in heavy abrasive slurries without the need for flush or quench water
- Reliable design that deals with real life slurry pumping conditions
- Easy to maintain

## SEAL SUPPORT SYSTEMS

# SpiralTrac®

**Environmental Controller**

When used with Chesterton mechanical seals, SpiralTrac Environmental Controllers greatly enhance seal reliability by effective removal of solids and improved cooling of the stuffing box.



Version		Materials
F (Split)	Greatly reduced flush	EN 1.4401 (316SS)
N	Reduced/no flush in non-fibrous fluids	416SS PTFE - Glass-Filled
D	Reduced/no flush in fibrous fluids	PTFE - Carbon Graphite-Filled Bronze
P (Split)	Packing version	EN 3.7035 (Ti) AWC800 - Red Polymer
C	With drain for crystallizing media	EN 2.4360 (Monel® K400)
Arrangements		
Type A	Counter bore fit	
Type B	Bore fit	
Type S	Axial split	
Type I	Impeller side installation	
Type E	Externally keyed	

- Extends seal reliability in most rotating equipment applications
- Reduces cost of flushing in abrasive applications
- Fits all rotating equipment

# Intelli-Flow™ HT

**Water Saver**

Features a thermally activated valve that automatically drains hot barrier fluid (only when necessary) to keep double seals running cool and reliable. Valve opening temperature preset to work with S20 Seals.



Operating Conditions	
Pressure	20 bar g (300 psig)
Temperature	125°C (250°F)
Temperature Set Point	80°C (176°F)
Connections	1/4 NPT
Materials	EN 1.4401 (316SS)

- Clean-in-place
- Maintenance-free
- Easy to install
- Up to 95% water savings compared to open barrier fluid supply

SEAL SUPPORT SYSTEMS

# BSS

## Buffer Support System for Double Seals

Plan 52 Non-Pressurized Tank. Easy to install, complete, non-pressurized solution for reliable operation of double seals.

Technical Data	
Tank Capacity	12 l (3.2 g) Maximum 9 l (2.4 g) Operating
Tank Operating Pressure	17 bar (250 psi) Maximum
Tank Material	EN 1.4307 (304L)
Cooling Capacity	400 W Tank Only 1.5 kW with Cooling Coil 4 kW with Cooling Coil and Circulation Pump
Auxiliary Connection	1" x 2" NPT and 1" x 1/2" NPT



- Pre-configured system; simplified ordering process
- Simple maintenance of fluid level

# PSS

## Pressurized Support System for Double Seals

Standard Plan 53A Tank. Easy to install, complete, pressurized solution for reliable operation of double seals.

Technical Data	
Tank Capacity	12 l (3.2 g) Maximum 9 l (2.4 g) Operating
Tank Operating Pressure	17 bar (250 psi) Maximum
Tank Material	EN 1.4307 (304L)
Cooling Capacity	400 W Tank Only 1.5 kW with Cooling Coil 4 kW with Cooling Coil and Circulation Pump
Auxiliary Connection	1" x 2" NPT and 1" x 1/2" NPT



- Preconfigured system; simplified ordering process
- Simple maintenance of fluid level
- Standard Plan 53A tank

# WSS

## Water Saving System for Double Seals

Plan 53P Automatic Water Support Tank. Easy to install, complete solution with minimal water consumption for reliable operation of double seals.

Technical Data	
Tank Capacity	12 l (3.2 g) Maximum 9 l (2.4 g) Operating
Tank Operating Pressure	17 bar (250 psi) Maximum*
Tank Material	EN 1.4307 (304L)
Cooling Capacity	400 W
Auxiliary Connection	1" x 1" NPT and 1" x 1/2" NPT

\* Pressure regulator limit: 125 psi.



- Maintenance-free: automatic level & pressure management
- Minimizes seal support water usage
- Pre-configured system and options for a simplified ordering process



# Chesterton Connect™

## Simplified Equipment and Process Monitoring for Pumps and Sealing Systems

Chesterton Connect is a simple to use data acquisition tool that enables you to safely and conveniently monitor your process and equipment's operating conditions. Utilizing Bluetooth® technology and a robust design to withstand harsh environments, Chesterton Connect makes it easy to monitor:

- Equipment vibration
- Surface temperature
- Process temperature
- Process pressure

## Sensor Version and Certifications

### Sensor v1.0

Product ordering number: 403700



**IP66, NSF61, ACS, CE, FCC, IC RoHS, VCCI, RCM**

Complies with  
IMDA Standards  
DB106440

### Sensor IS (Intrinsically Safe)

Product ordering number: 403699



**IP66, NSF61, ACS, CE, FCC, IC RoHS, VCCI, RCM**

#### Hazardous Ratings

ATEX/IECEx	II 1 G Ex ia IIB T4 Ga II 1 D Ex ia IIB T200 166°C Da
Zone	Class I Zone 0 AEx ia IIB T4 Ga Zone 20 AEx ia IIB T166°C Da
Division	Class I Div 1 Groups C D T4 Class II Div 1 Groups F G T4
Rated Temp	-20°C ≤ Ta ≤ +85°C

Operating Parameters		Software Features	
<b>Pressure</b>	-1 bar g – 68 bar g	<b>Security</b>	Encrypted setup and password protected operation
<b>Sensor Limit</b>	(-14.7 psig – 1000 psig)	<b>Personalization</b>	Configurable name and usage information
<b>Temperature Limit (body)</b>	-20°C – 85°C (-4°F – 185°F)	<b>Data Acquisition</b>	Monitoring mode for extended battery life (5-minute intervals) and high accuracy mode for troubleshooting (1-minute intervals)
<b>Temperature limit (sensor)</b>	-20°C – 125°C (-4°F – 257°F)	<b>Data Storage</b>	Up to 30 days of rolling history
<b>Vibration Sensor</b>	3-axis accelerometer ±16g	<b>Alerts</b>	Configurable thresholds and alerts
<b>Battery</b>	3.6V lithium thionyl chloride battery (replaceable)	<b>Analytics</b>	Time plotted trends and analysis
<b>Fitting</b>	1/4" NPT 316SS connection	<b>Data Export</b>	Email export of sensor data and alarms
<b>Mount</b>	Magnetic mounting base		


## Recommended Installation Locations

### Surface Vibration and Temperature

- 1 Inboard Bearing
- 2 Outboard Bearing

### Process Pressure and Temperature

- 3 Seal and Seal Chamber
- 4 Discharge
- 5 Suction

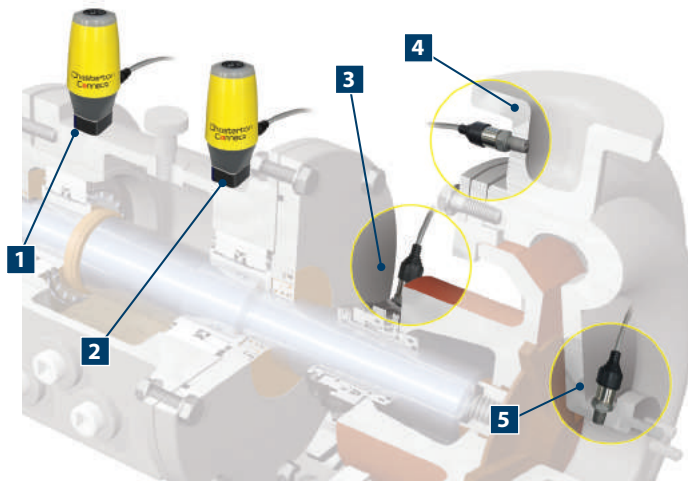

Sensor v1.0

Sensor IS

**Chesterton Connect™**

### Advantages

- Easy to install and configure
- Early detection of process instabilities
- Prioritize equipment maintenance
- Securely access your data
- View multiple sensors in one mobile app
- Replaceable battery



# Chesterton Connect™ Cloud

## Monitor, Analyze, and Compare Equipment Health from Wherever You Are\*

The Chesterton Connect Cloud provides a powerful window into the health of all equipment monitored by Chesterton Connect devices.





From wherever you are on a 24/7 basis, view overall performance, explore variances and trends, add notes, and take action to increase uptime and productivity.

Chesterton Connect Cloud allows you to:

- Spot trends to address potential threats to uptime
- Pinpoint issues causing difficult-to-uncover failures
- Predict potential problems to help lower maintenance costs
- Easily modernize plant operations

Software Features	
Security	24/7 security, authentication, and backup of data
Personalization	Flexible management of user roles, permissions, and reports
Data Storage	Unlimited storage of Chesterton Connect measurements, alarms, and notes
Data Visualization	Simple to navigate graphs, alarms, and notes
Analytics	Time-plotted trends and events
Reports	Easily print asset reports
Access	Global access to unlimited sensors

**Supported on all popular browsers**

	Google Chrome	✓
	Mozilla Firefox	✓
	Microsoft Edge	✓
	Apple Safari	✓



- Set alert notifications by equipment
- Correlate multiple measurements for a specific time
- Quickly overlay and compare data for multiple pieces of equipment
- Compare vibration against published standards
- Produce equipment performance reports easily

\*Internet connectivity required.

## Packing Product Selection Guide

Please contact your local Chesterton Representative to help you select the best product for your application.

Family	Product	Media				Duty			Key Benefits	
		Water	Chemicals	Slurries	Food and Beverage	High Temperatures	pH	High Speeds	Reliability	Economical
Pump Packing	DualPac® 2211	✓++	✓	✓++		✓+	✓+	✓+	✓++	✓+
	DualPac® 2212	✓++	✓	✓++		✓	✓+	✓	✓++	✓
	370	✓++	✓++	✓		✓++	✓+	✓++	✓++	✓+
	425	✓		✓+	✓+	✓+	✓++	✓+	✓+	✓++
	477*	✓++	✓++	✓+		✓++	✓++	✓	✓+	
	1725A	✓		✓+	✓++	✓+	✓++	✓+	✓+	✓+
	1730	✓++	✓+	✓++		✓+	✓+	✓	✓++	✓+
	1730SC	✓++	✓+	✓++		✓+	✓+	✓	✓++	✓+
	1760	✓++	✓++	✓+		✓+	✓++	✓++	✓++	✓+
	1830-SSP	✓++	✓++	✓++		✓+	✓+	✓++	✓++	✓+
	GraphMax™ *	✓++	✓++	✓		✓++	✓+	✓++	✓++	✓+
	CMS 2000	✓++			✓++		✓	✓	✓+	✓++
Environmental Enhancers	SuperSet™	✓	✓	✓++		✓			✓++	✓

Family	Product	Media			Key Benefits		Equipment		
		Steam	Chemicals	Emissions	Reliability	Economical	Control Valves	Block Valves	Motor Operating Valves
Valve Packing	1600	✓+	✓++	✓	✓+	✓+		✓++	✓++
	1601	✓++	✓+		✓++	✓+		✓++	✓++
	1622™	✓	✓++	✓++	✓++	✓+		✓++	✓++
	1724™	✓	✓++	✓+	✓++	✓	✓++	✓+	✓+
	5800	✓++	✓++		✓++	✓+	✓++		✓
	5800E	✓++	✓++	✓+	✓++	✓+	✓++		
	GraphMax*	✓++	✓++	✓	✓+	✓+		✓	✓
	477*	✓++	✓++	✓+		✓++	✓++	✓	✓+

✓++ = Best Choice
✓+ = Better Choice
✓ = Good Choice

\*Denotes packing can be used in either pump or valve applications.

# DualPac® Technology

## Combining Two Complementary Materials in One Packing

By inventing a new braiding process, Chesterton has successfully combined two materials in a unique way allowing easier expansion under gland load, creating better shaft contact, and increasing leak control even in worn equipment. Both lab and field tests have shown that DualPac packing requires fewer gland adjustments, resulting in drastically extended life in severe service applications.



- Significantly fewer gland adjustments than traditional packing
- Simplifies your inventory: you can use the same packing for end rings and sealing rings
- Better utilization of gland load in sealing configuration
- Requires less overall maintenance
- Minimizes shaft scoring

## DualPac® 2211 Packing

### Severe Slurry Packing

DualPac 2211 packing provides all of the performance advantages of ePTFE and aramid without the compromises of traditional mixed fibers packing.

Technical Data	
Material	ePTFE and aramid
Applications	Slurry processing applications such as ore slurries, mineral handling, and dewatering tailing pumps.
Available Sizes	8 mm – 25.4 mm (5/16" – 1")
Pressure Limit	20 bar g (300 psig)
Shaft Speed	10 m/s (2000 fpm)
Temperature Limit	260°C (500°F)
Chemical Resistance	pH 3 – 11



## DualPac® 2212 Packing

### High Performance Multi-Purpose Packing

DualPac 2212 packing combines a burn-resistant material on the packing's shaft side with a highly resilient outer fiber.

Technical Data	
Material	Synthetic fibers with lubricants and blocking agents
Applications	Demanding rotating equipment such as agitators, mixers, stock pumps, sludge pumps, slurry pumps, and process pumps.
Available Sizes	6.4 mm – 25.4 mm (1/4" – 1")
Pressure Limit	35 bar g (500 psig)
Shaft Speed	10 m/s (2000 fpm)
Temperature Limit	260°C (500°F)
Chemical Resistance	pH 3 – 11





PUMP, MIXER, AND AGITATOR PACKING

# 370


## Heat-Dissipating, High-Grade Carbon Yarn Packing

A premium carbon yarn, heat-dissipating pump packing for maximum plant-wide reliability.

**Technical Data**

<b>Material</b>	High quality, carbon yarn incorporated with particles of pure graphite, high-temperature tolerant oils, and molybdenum disulfide
<b>Applications</b>	Pulpers, stock pumps, agitators, fan pumps, vacuum pumps, condensate pumps, screw feeders, and refiners
<b>Available Sizes</b>	3.2 mm – 38 mm (1/8" – 1 1/2")
<b>Pressure Limit</b>	35 bar g (500 psig)
<b>Shaft Speed</b>	18 m/s (3600 fpm)
<b>Temperature Limit</b>	315°C (600°F) steam
<b>Chemical Resistance</b>	pH 0 – 14 except oleum, fuming nitric acid, aqua regia, and fluorine

Note: Can be certified to less than 200 ppm leachable chloride. Consult factory for specific chemical assay.

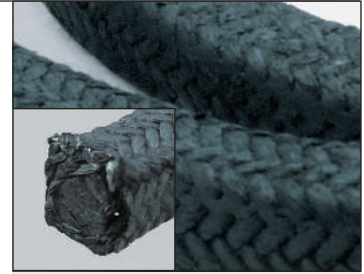

- Designed for high-temperature seal conditions
- Fast break-in
- Controls leakage with minimal friction
- Reduced leakage and flushing
- PTFE-free


# 425

## Economical Food Processing Packing

Manufactured using a virgin PTFE filament and a white oil lubricant. Complies with the USDA requirements for minimal food contact carbon resins.

**Technical Data**

<b>Material</b>	PTFE filament with white oil lubricant
<b>Applications</b>	All types of equipment in the food processing and handling industry such as: valves, cookers, blenders, agitators, pumps, and mixers
<b>Available Sizes</b>	4.7 mm – 25.4 mm (3/6" – 1")
<b>Pressure Limit</b>	14 bar g (200 psig)
<b>Shaft Speed</b>	6 m/s (1200 fpm)
<b>Temperature Limit</b>	230°C (450°F)
<b>Chemical Resistance</b>	pH 0 – 14

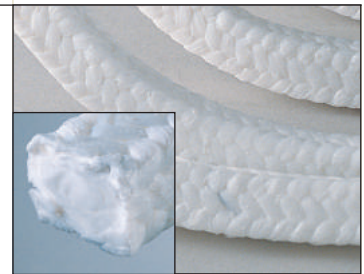

- Meets USDA requirements
- Meets FDA requirements 21 CFR 178.3620(a) and 21 CFR 177.1550
- For use in valves, pumps, and other rotating equipment

## PUMP, MIXER, AND AGITATOR PACKING


# 477-1

## Carbon Fiber Packing

A carbon yarn formulation combined with superior blocking agents for greater flexibility and sealing.

### Technical Data

Material	Low modulus carbon fiber
Applications	Virtually all pumps and valves against most solvents, gases, and other liquids
Available Sizes	3.2 mm – 25.4 mm (1/8" – 1")
Pressure Limit	250 bar g (3600 psig) valves; 14 bar g (200 psig) pumps
Shaft Speed	15 m/s (3000 fpm)
Temperature Limit	565°C (1050°F)
Chemical Resistance	pH 0 – 13 except with strong oxidizers

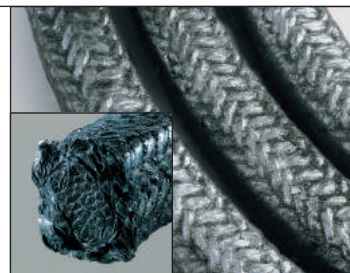

- Strong, yet pliable, continuous filament carbon yarn
- Unique inorganic blocking agent inhibits gas/liquid penetration
- Molybdenum-based corrosion inhibitor protects against stem pitting


# 1725A

## Food Process Packing

A premium, expanded PTFE yarn with a specially designed lubricant to provide superior sealing capability in rotating equipment.

### Technical Data

Material	Expanded PTFE yarn
Applications	Chemical- and food-grade rotating equipment except for strong oxidizers and molten alkali metals
Available Sizes	6.4 mm – 25.4 mm (1/4" – 1")
Pressure Limit	22 bar g (325 psig)
Shaft Speed	9 m/s (1800 fpm)
Temperature Limit	Minimum: -29°C (-20°F) Maximum: 232°C (450°F)
Chemical Resistance	pH 0 – 14

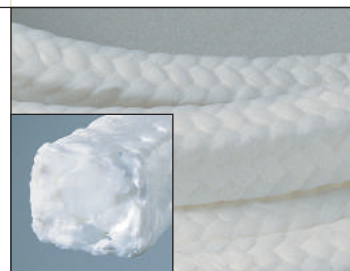

- Meets USDA requirements for minimal food contact
- Meets FDA requirements 21 CFR 178.3297, 21 CFR 177.2800, 21 CFR 177.1550
- Approved by NSF/ANSI and ACS standards for use in drinking water systems
- Completely inert to most materials
- Handles high shaft speeds

PUMP, MIXER, AND AGITATOR PACKING

# 1730

## Glaze-Resistant General Service Packing

A superior, user-friendly, pump packing that drastically reduces the chance of glazing the packing and damaging the shafts.

### Technical Data

Material	Heat-resistant fibers with lubricants and blocking agents
Applications	Black liquor pumps, chemical pumps, agitators
Available Sizes	6 mm – 25.4 mm (1/4" – 1")
Pressure Limit	28 bar g (400 psig)
Shaft Speed	10 m/s (2000 fpm)
Temperature Limit	290°C (550°F)
Chemical Resistance	pH 1 – 13



- Easy and fast break-in
- Abrasion-resistant, while non-scoring
- Good chemical resistance
- Glaze-resistant
- User-friendly


# 1730SC

## Silicone Core Packing

Chesterton 1730SC packing combines a resilient, silicone rubber core with the heat-resistant fiber of Chesterton's 1730.

### Technical Data

Material	Thermoset fibers with lubricants and blocking agents
Applications	Agitators, mixers, blenders, washers, and pulpers
Available Sizes	9.5 mm – 25.4 mm (3/8" – 1")
Pressure Limit	28 bar g (400 psig)
Shaft Speed	10 m/s (2000 fpm)
Temperature Limit	230°C (450°F)
Chemical Resistance	pH 2 – 12

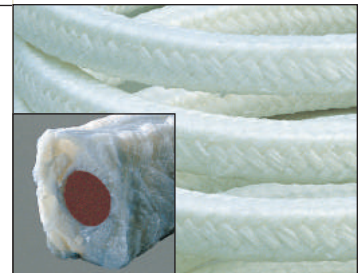

- Rugged, easy-to-use, general service packing
- Withstands radial shaft motion and vibration
- Handles shaft/bore eccentricity

## PUMP, MIXER, AND AGITATOR PACKING

# 1760

## Chemical Packing

Strong and dense PTFE fiber packing for chemical applications with the heat dissipating properties of graphite.

### Technical Data

Material	Graphite coated PTFE yarn with engineered break-in lubricants
Applications	High shaft speed, and low friction applications
Available Sizes	3.2 mm – 25.4 mm (1/8" – 1")
Pressure Limit	17 bar g (250 psig)
Shaft Speed	18 m/s (3600 fpm)
Temperature Limit	260°C (500°F)
Chemical Resistance	pH 0 – 14



- Dense braid ensures excellent leakage control and prevents solid embedment
- Excellent chemical resistance
- High shaft speed

# 1830-SSP

## Slurry Packing

Designed with a hybrid yarn and combining advanced, expanded, graphite PTFE yarn with carbon yarn reinforcement.

### Technical Data

Material	Carbon-reinforced, expanded, graphite PTFE
Applications	Bauxite slurries, bottom ash slurry pumps, mineral handling slurries, tailings pumps, and other slurry processing applications
Available Sizes	8.0 mm – 25.4 mm (5/16" – 1")
Pressure Limit	28 bar g (400 psig)
Shaft Speed	18 m/s (3600 fpm)
Temperature Limit	260°C (500°F)
Chemical Resistance	pH 0 – 14 with exception of strong oxidizers in the 0 – 2 pH range



- Developed to meet rigid demands of slurry sealing applications
- Excellent chemical resistance
- Low friction, less heat generation, non-abrasive, saves shafts and shaft sleeves



PUMP, MIXER, AND AGITATOR PACKING

# CMS 2000

## Injectable Packing System

Chesterton CMS 2000 Injectable Packing System is an advanced, flushless, stuffing box leakage control sealant made of high-purity, reinforced fiber.



**Technical Data**

<b>Applications</b>	Stock pumps, white water pumps, river water pumps, condensate pumps, water treatment pumps, and also rotating equipment applications in the food processing and handling industry.
<b>Pressure Limit</b>	14 bar g (200 psig) White 7 bar g (100 psig) FP
<b>Shaft Speed</b>	10 m/s (2000 fpm) White 6 m/s (1200 fpm) FP
<b>Temperature Limit</b>	205°C (400°F)
<b>Chemical Resistance</b>	pH 1 – 13 White not recommended for oxidizers, fluorine, chlorine trifluoride and related compounds, and molten alkali metals pH 0 – 14 FP

- Eliminates flush and reduces leakage to insignificant levels
- Will not score shaft sleeves
- Effective with worn, fretted sleeves
- Never disassemble to repack again

# Stabilizer Cage

## Stuffing Box Accessory for the CMS 2000 Injectable Sealant

Improves the integrity and reliability of the CMS 2000 injectable stuffing box sealant in a variety of applications. The stabilizer cage is available in six different sizes and each kit includes eight rail sections that can make lengths up to 24".


The stabilizer cage is rated for a maximum service temperature of 110°C (230°F).



# SuperSet™

## Enhanced Packing Sets

Chesterton performance packing sets, in combination with the patented SpiralTrac® Environmental Controller, drastically reduces flush water consumption and increases equipment service life.

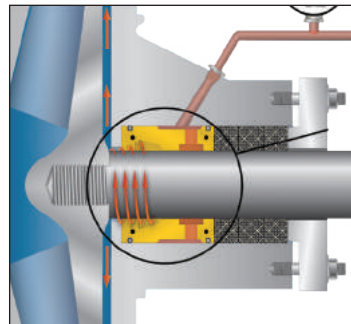

Versions Available	Applications
1730 SuperSet	General service in slurries and clean fluids
1400R SuperSet	Worn equipment, high-speed and high-temperature applications
1760 SuperSet	Highly aggressive chemical environments oxidizers in the 0 – 2 pH range
370 SuperSet	High performance, high-temperature applications
GraphMax™ SuperSet	High-temperature and applications needing extrusion resistance
DualPac® 2211 SuperSet	Highly aggressive slurry processing applications

- Reduces flush water consumption
- Increases equipment MTBR
- Reduces shaft sleeve wear

VALVE PACKING

# 1622™

## Emission Control Packing for Block Valves




### Low E Packing for Exceptional Emissions Control

Chesterton 1622 Emissions Packing is designed to minimize valve emissions and exceeds current emissions requirements for the refinery, petrochemical, and chemical industries. 1622 has received both the 2010 National Pollution Prevention Roundtable MVP<sup>2</sup> and the 2011 Vaaler Award for emission and pollution reduction technology.

**Guaranteed\* to seal less than 100 ppm for 5 years per EPA method 21.**

### Independently tested and proven to provide an average <2 ppm

In API 622 testing, 1622 packing had an average emissions rate of <2 ppm and a onetime maximum of 18 ppm. These extremely low rates were achieved without gland adjustments for 1510 strokes and five temperature cycles. Now you can easily meet emissions compliance for block valves utilizing Chesterton 1622 Emissions Packing.

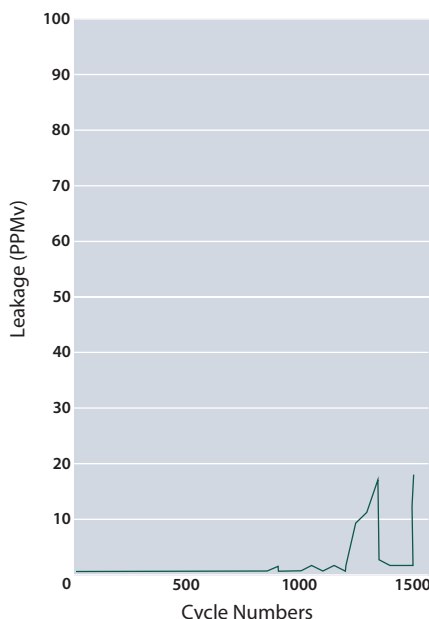

Yarmouth Research and Technology, www.yarmouthresearch.com

### Applications

Light and heavy hydrocarbons, VOCs, VHAPs, steam, and most non-oxidizing chemicals.



- Extremely low emissions
- Fire safe to API 607
- Single spool packing
- High-pressure capability
- API 622 3rd edition tested and qualified
- API 624 tested a qualified for numerous valve OEMs
- ChevronTexaco Standard tested and passed
- Valve packing emission warranty
- ISO 15848-1 passed CO<sub>2</sub> at 200°C to the tightness class BH
- ISO 15848-1 passed CO<sub>2</sub> at 400°C to the tightness class BH

### Technical Data


<b>Material</b>	Nickel alloy, wire-reinforced, flexible graphite packing with special blocking agents
<b>Available Sizes</b>	3.2 mm – 25.4 mm (1/8" – 1")
<b>Pressure Limit</b>	345 bar g (5000 psig)
<b>Temperature Limit</b>	Max 650°C (1200°F) steam 450°C (850°F) oxidizing atmosphere
<b>Chemical Resistance</b>	pH 0 – 14 except in strong oxidizers

\*conditions apply

VALVE PACKING

# GraphMax™

**Interbraided Exfoliated Graphite Packing for Pumps and Valves**  
 Structurally reinforced graphite packing for demanding applications to dramatically improve the packing's resistance to extrusion.

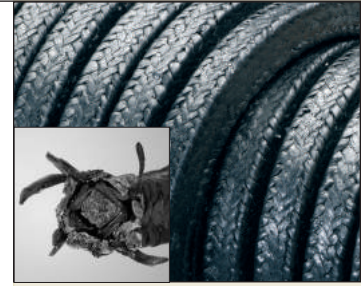

**Technical Data**

<b>Material</b>	Interbraided graphite packing with carbon yarns incorporated in the braided structure in a way that allows a very tight braid
<b>Applications</b>	Boiler feed, condensate, hot water, heater drains, and other high demanding pump applications. Also can be used on valves in hard to seal service.
<b>Available Sizes</b>	9.5 mm – 25.4 mm (3/8" – 1")
<b>Pressure Limit</b>	206 bar g (3000 psig) valves; 28 bar g (400 psig) pumps
<b>Shaft Speed</b>	17 m/s (3400 fpm)
<b>Temperature Limit</b>	Minimum -240°C (-400°F) Maximum 650°C (1200°F) steam service
<b>Chemical Resistance</b>	pH 0 – 14 except oleum, fuming nitric acid, and aqua regia

- Exclusive construction for plant-wide use in pumps and valves
- Maintains structural integrity for easy removal
- Carbon fiber-reinforced graphite strands provide maximum extrusion resistance and high-pressure capability

# 1724™

**High Quality, Interbraided PTFE Valve Packing**  
 Chesterton 1724 is a unique PTFE valve packing material specially treated with protective lubricants that will not harden and deteriorate in a wide range of chemical applications.



**Technical Data**

<b>Material</b>	Non-hardening, high grade PTFE yarn with PTFE coating
<b>Applications</b>	Block valves, motor operated valves, control valves
<b>Available Sizes</b>	3.2 mm – 25.4 mm (1/8" – 1")
<b>Pressure Limit</b>	206 bar g (3000 psig)
<b>Temperature Limit</b>	260°C (500°F)
<b>Chemical Resistance</b>	pH 0 – 14

- Non-hardening
- Treated with protective lubricants
- Extrusion resistant
- Excellent chemical resistance

VALVE PACKING


# 1600

## Advanced, Reinforced Exfoliated Graphite Packing

Off the spool nickel alloy wire mesh graphite packing with blocking agents for multi-service performance.

### Technical Data

<b>Material</b>	Nickel alloy wire-reinforced flexible graphite packing
<b>Applications</b>	Block valves, as an end ring on control valves, motor operated valves and sootblowers
<b>Available Sizes</b>	3.2 mm – 25.4 mm (1/8" – 1")
<b>Pressure Limit</b>	580 bar g (8400 psig)
<b>Temperature Limit</b>	650°C (1200°F) steam 455°C (850°F) oxidizing environment
<b>Chemical Resistance</b>	pH 0 – 14 except in strong oxidizers



- Extreme high-pressure capability
- Remains flexible in service
- Excellent sealing in many services


# 1601

## Reinforced Graphite Steam Service Packing

A nickel alloy wire mesh graphite packing designed for the power industry for superior leakage control and high performance without PTFE lubrication.

### Technical Data

<b>Material</b>	Nickel alloy wire-reinforced, flexible graphite packing
<b>Applications</b>	All isolation and steam valves
<b>Available Sizes</b>	3.2 mm – 25.4 mm (1/8" – 1")
<b>Pressure Limit</b>	345 bar g (5000 psig)
<b>Temperature Limit</b>	650°C (1200°F) steam 455°C (850°F) oxidizing environment
<b>Chemical Resistance</b>	pH 0 – 14 except in strong oxidizers



- Proven in high-pressure, high-temperature steam service
- A corrosion inhibitor is applied to deter stem pitting
- PTFE-free



VALVE PACKING


# 5800/5800E

## Die-Formed Graphite Wedge Low Friction Sealing Rings

5800/5800E are designed to drastically lower valve stem friction while maintaining excellent sealability in high-temperature applications and requires minimum gland loads. 5800 is used in steam applications and 5800E is for emissions applications.

Technical Data	5800	5800E
<b>Material</b>	Die-formed, high-purity graphite	Die-formed, high-purity graphite
<b>Applications</b>	Nuclear and process industry services to seal MOVs, AOVs, and steam services.	Commercial and process industry services to seal MOVs, AOVs, and steam services.
<b>Pressure Limit</b>	210 bar g (3000 psig) no end ring 310 bar g (4500 psig) 1600 end ring*	250 bar g (3600 psig)
<b>Temperature Limit</b>	2760°C (5000°F) in non-oxidizing atmospheres, 430°C (800°F) in oxidizing atmospheres	565°C (1050°F) in non-oxidizing atmospheres, 430°C (800°F) in oxidizing atmospheres
<b>Chemical Resistance</b>	pH 0 – 14	pH 0 – 13

\*When combining 5800 with 1600 end rings the maximum temperature is:  
650°C (1200°F) in non-oxidizing atmospheres,  
430°C (800°F) in oxidizing atmospheres

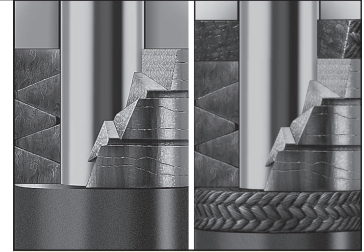

5800

5800E

- Dramatically improves valve stem response
- Low emissions guarantee\*\*
- Excellent chemical and temperature resistance

# Valve Live Loading

Engineered valve sealing solution for improved reliability and ease of maintenance.

Technical Data	Name	Description
	<b>Cartridge Live Loading Assembly (CLL)</b>	The stainless steel outer guide makes packing installation easier and more reliable by using spring deflection as a reference of gland load. The assembly also gives more travel to the packing set, allowing it to handle more thermal cycles without leakage. CLLs provide an easy visual indicator to reapply and maintain proper load to the packing set.
	<b>5150 Live Loading Assembly</b>	5150 live loading assemblies in conjunction with applied torque dramatically increase bolt travel due to deflection of the disc springs. The assemblies reduce valve leakage due to thermal cycling and packing wear.
	<b>5300</b>	A square graphite precise density sealing ring with a low minimum gland load that creates a seal without large torque valves and friction. 5300 has a corrosion inhibitor to deter stem pitting.
	<b>5100 Carbon Spacers</b>	5100/5101 is a 99% carbon spacer that is used to retrofit deep stuffing boxes to reduce the number of rings to 5 in a valve. It is made to highly engineered tolerances to avoid scoring of the valve stem.

\*\* Conditions apply



- Automatic gland adjustment for constant pressure
- Zero leakage rates
- Eliminates the need for excessive gland force
- Continually compensating for in-service packing consolidation
- Used in demanding applications in harsh environments
- Safeguards critical applications with reliable technology

GASKET AND FLANGE SEALING

# Flange Live Loading

## Flange Discs

Increase reliability, lower emissions, and reduce total costs by using tailored sealing solutions for critical flanges.

Technical Data	5500	5505H
Material	Specialized stainless steel alloy	Chromium steel with black oxide coating
Temperature Limit	-200°C – 300°C (-328°F – 575°F)	0°C – 600°C (32°F – 1100°F)
Corrosion Resistance	better	good
Applications	Use in combination with Chesterton® Camprofile or Steel Trap™ gaskets on process flanges, heat exchangers, vessels, reactors, valve bonnets, housings, sight glasses	
Warranty	3 year warranty (see flange live loading warranty for conditions)	



- Shutdown to shutdown reliability
- Significantly reduces downtime on critical equipment
- Lowers emissions and meets environmental regulations
- Reduces leakage and product loss
- Reduces housekeeping concerns
- Improves plant efficiency and reduces total cost

# Manway Sealing

## Manway Gaskets

Improper manway sealing can result in a door gasket failure and significant safety risks. Chesterton has developed a more reliable manway sealing solution.

Please contact your local Chesterton Representative to help you select the best product for your application.

Technical Data	SteelTrap™	459
Material	Metal carrier from virtually any metal with graphite, PTFE, or ceramic sealing elements	Graphite sheet with nickel foil reinforcement
Pressure Limit	415 bar g (6000 psig)	140 bar g (2000 psig) Compressibility (ASTM-F36) 35% minimum
Temperature Limit	Atmosphere -200°C – 500°C (-328°F – 932°F) Steam up to 650°C (1200°F) Inert media -200°C – 900°C (-328°F – 1650°F)	870°C (1600°F) non-oxidizing 450°C (850°F) oxidizing
Chemical Resistance	pH 0 – 14	pH 0 – 14



- Reduces housekeeping concerns
- No hot retorquing
- Reduces maintenance requirements

SHEET GASKETS

# 457

## High-Temperature Carbon Fiber Sheet

Chesterton 457 Carbon Fiber/Nitrile Binder Sheet is a high-temperature, non-asbestos sheet gasket material formulated for a wide variety of gasketing needs. 457 is recommended for use in a broad range of steam, water, oil, and hydrocarbon applications.\*

**Technical Data**

<b>Material</b>	Carbon fiber with nitrile binder
<b>Applications</b>	A broad range of steam, water, oil and hydrocarbon applications
<b>Available Thickness</b>	0.4 mm – 3.2 mm (1/64" – 1/8")
<b>Temperature Limit</b>	450°C (840°F)
<b>Pressure Limit</b>	100 bar g (1470 psig)



- High-temperature capability
- Material formulated for a wide variety of gasketing needs

\*This product is not recommended for use in chlorinated hydrocarbons, aromatic, and ester ketones.

# 459

## Graphite Sheet with Nickel Reinforcement

**Technical Data**

<b>Material</b>	Flexible graphite with a 0.026 mm nickel flat insert
<b>Applications</b>	Pipe flanges, vessels, reactors, valve bonnets, housings
<b>Available Thickness</b>	1 mm, 1.6 mm (1/16"), 2 mm, and 3.2 mm (1/8")
<b>Sheet Size</b>	0.8 mm – 2.4 mm (1/32" – 3/32")
<b>Temperature Limit</b>	870°C (1600°F) non-oxidizing, 454°C (850°F) oxidizing, minimum -200°C
<b>Pressure Limit</b>	140 bar g (2000 psig)
<b>Chemical Resistance</b>	pH 0 – 14



- Easy to cut manually
- Excellent pressure capability
- High-temperature capability
- High chemical resistance

# ECS-T

## PTFE Sheet Gasket

Filled PTFE sheet with excellent mechanical properties and outstanding chemical resistance.

**Technical Data**

<b>Material</b>	PTFE with fillers
<b>Applications</b>	High pressure and temperature services, especially in chemical and hydrocarbon plants in strong acids
<b>Available Thickness</b>	1 mm, 1.5 mm, 2 mm, and 3 mm
<b>Sheet Size</b>	0.8 mm – 3.2 mm (1/32" – 1/8")
<b>Temperature Limit</b>	260°C (500°F)
<b>Pressure Limit</b>	83 bar g (1200 psig)
<b>Chemical Resistance</b>	pH 0 – 14



- High chemical resistance
- Excellent in strong acids

## SEMI-METAL GASKETS


# Steel Trap™

### High Performance, Semi-Metallic Gasket

An innovative flange sealing system for safe and permanent sealing of flanges in severe services.

#### Technical Data

<b>Material</b>	Metal carrier from virtually any metal with graphite, PTFE, or ceramic sealing elements
<b>Applications</b>	Pipe flanges, heat exchangers, vessels, reactors, valve bonnets, and housings
<b>Pressure Limit</b>	415 bar g (6000 psig)
<b>Temperature Limit</b>	Atmosphere -200°C – 500°C (-328°F – 932°F) Steam up to 650°C (1200°F) Inert media -200°C – 900°C (-328°F – 1650°F)
<b>Chemical Resistance</b>	pH 0 – 14



- Thin design and soft sealing material encapsulation provide increased blow-out safety
- Replaces sheet gasketing without equipment modification
- Can be manufactured in virtually any shape

# Camprofile

### High Performance, Semi-Metallic Gasket

Highly reliable flange gasket with excellent emission control.

#### Technical Data

<b>Material</b>	Stainless steel carrier with a graphite or PTFE sealing element (more materials available)
<b>Applications</b>	Pipe flanges, heat exchangers, vessels, reactors, valve bonnets, housings
<b>Pressure Limit</b>	300 bar g (4350 psig)
<b>Temperature Limit</b>	graphite sealing layer 550°C (1020°F) inert media -200°C – 900°C (-328°F – 1650°F) PTFE sealing layer 300°C (572°F)



- Certified low emission performance
- High reliability
- DIN and ANSI standard gaskets
- Custom shapes available, including heat exchanger gaskets

# Spiral Wound

### Economical, Semi-Metallic Gasket

Excellent emission performance in an all-around general plant gasket.

#### Technical Data

<b>Material</b>	Stainless steel windings with graphite or PTFE sealing layer, stainless steel inner ring, coated carbon steel outer ring (more materials available)
<b>Applications</b>	Pipe flanges, vessels, reactors, valve bonnets, and housings
<b>Pressure Limit</b>	350 bar g (725 psig)
<b>Temperature Limit</b>	graphite sealing layer 450°C (840°F) PTFE sealing layer 300°C (570°F)
<b>Chemical Resistance</b>	pH 0 – 14


























- Economical, semi-metallic solution
- Low emissions
- DIN and ANSI standard gaskets and custom shapes available
- Various configurations



# Polymer Seals Product Selection Guide

Please contact your local Chesterton Representative to help you select the best product for your application

	Types	Speed	Product	Profile Series	Description	Attributes					Friction			Wear Resistance		
						Mold	*Mach.	Hyd.	Pne.	Split	Low	Mid	High	Low	Mid	High
Reciprocating Motion	Cap Seals (Rod and Piston)	to 15 m/s (3000 ft/min)	RCCS		Double acting, dual component seal		●	●	●		●				●	
			PCCS		Double acting, dual component seal		●	●	●		●					●
	Wipers		WCCS		Positive angled profile with flange		●	●	●	●	●					●
			W21K		Positive angled profile with flange		●	●	●		●					
	Rod Seals, U-Cups		R22KN		Single acting, positive angled profile		●	●	●		●					●
			R22K		Single acting, radiused sealing surface for hydraulic applications		●		●			●			●	
			R23K		Single acting, radiused sealing surface for pneumatic applications		●		●			●			●	
	Rod Seals, Stacked Sets		R27K		Single acting, positive angled profile, multiple stacked set		●	●	●	●			●		●	
			R11K		Single acting, negative angled profile, dual stacked set	●	●	●		●		●			●	
	Piston Seals, U-Cups		P22KN		Single acting, positive angled profile			●	●		●				●	
			P22K		Single acting, radiused sealing surface for hydraulic applications		●		●			●			●	
			P23K		Single acting, radiused sealing surface for hydraulic applications		●		●			●			●	
	Piston Seals, Stacked Sets		P27K		Single acting, positive angled profile, multiple stacked set		●	●		●			●		●	
	Replaceable Bearings		16K, 17K, 18K, 19K		Metric and imperial English size bearing band and strips	●		●	●	●	●					●
			WR		Custom bearing bands		●	●	●	●	●					●
	Anti-Extrusion Rings		9K		Backup rings or anti-extrusion rings		●	●	●	●	●				●	
	Compression Seals (Rod and Piston)	to 0.75 m/s (150 ft/min)	R20K™		Double acting, negative angled profile, low speed hydraulic applications		●	●					●		●	
			P20K™		Double acting, negative angled profile, low speed hydraulic applications		●	●						●		●
	Cantilever Spring Energized	to 5 m/s (1000 ft/min)	100 Series		Single acting with cantilever spring for highly dynamic applications		●	●	●		●				●	
	Elliptical Coil Spring Energized	to 6 m/s (1200 ft/min)	200 Series		Single acting with elliptical spring for large tolerances or miniature designs		●	●	●		●				●	
Helical Wound Spring Energized	to 2.5 m/s (500 ft/min)	300 Series		Single acting with helical spring for static or slow speeds		●	●	●		●				●		
Stacked Set		500 Series		Single acting, stacked sets		●								●		
Static	Valve Seals		M20K-OR		Static seal for O-Ring upgrades in hydraulic valves		●	●			●			●		

Ratings on this chart are for reference only. Values may be higher or lower depending upon the application details such as surface finish, hardness, lubrication, and concentricity. Jacket/Spring combinations will also affect these values.

\*Machined product does not require tooling.

## Polymer Seals Product Selection Guide

	Types	Speed	Product Series	Profile	Description	Attributes					Friction			Wear Resistance		
						Mold	*Mach.	Bearing Protect.	Stuffing Box	Split	Low	Mid	High	Low	Mid	High
Rotary Motion	Continuous Rotary Lip Seals	to 20 m/s (4000 ft/min)	30K		Single acting, low pressure seal for bearing & gearbox protection		●	●			●					●
	Split Rotary Lip Seals	to 12.5 m/s (2500 ft/min)	33K		Single acting, non-pressure split seal for bearing & gearbox protection		●	●		●	●				●	
	Elliptical Coil Spring Energized	to 6 m/s (1200 ft/min)	200 Series		Single acting with elliptical spring for large tolerances or miniature designs		●	●	●			●				●
	Cantilever Coil Spring Energized	to 5 m/s (1000 ft/min)	100 Series		Single acting with cantilever spring for highly dynamic applications		●	●	●			●				●
	Helical Coil Spring Energized	to 2.5 m/s (500 ft/min)	300 Series		Single acting with helical spring for static or slow speeds		●	●	●			●				●
	Stacked Sets		500 Series		Single acting, stacked sets		●					●				●
	Wipers	to 0.5 m/s (100 ft/min)	W21K		Positive angled profile with flange, slow rotary	●	●	●		●		●			●	
	Rod & Piston Seals		R22KN, P22KN		Single acting, positive angled profile, slow rotary	●	●	●	●	●		●			●	
	Cartridge Seal	5 m/s (984 ft/min)	30KC		Polymer cartridge with inboard, outboard sealing elements and built-in flushing port		●		●							●
	Restriction Bushing	--	14K		Split, single acting with tapered lip seal		●		●	●						●
	Labyrinth Seal	30.5 m/s (6000 ft/min)	PLS		Polymer contactless labyrinth seal		●	●			●				●	



Ratings on this chart are for reference only. Values may be higher or lower depending upon the application details such as surface finish, hardness, lubrication, and concentricity. Jacket/Spring combinations will also affect these values. \*Machined product does not require tooling.

### STACKED SEALS

## 27K

### Split, Stacked Set for Hydraulic Rod Applications

Advanced stacked set technology for high-speed hydraulic applications and for scored, mechanically damaged rod and ram surfaces.



#### SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)
AWC704 (FKM)	6 – 304.8 (1/4 – 12)	-30 – 200 (-20 – 400)	34.5 (5000)	1.5 (300)
AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	103.5 (15000)	1 (200)
AWC825 (EU)	6 – 2540 (1/4 – 100)	-40 – 85 (-40 – 185)	103.5 (15000)	0.5 (100)
AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	52 (7500)	0.9 (185)
AWC860 (EU)	6 – 500.8 (1/4 – 20)	-50 – 120 (-60 – 250)	103.5 (15000)	1.25 (250)

\* Please contact your Chesterton representative for larger sizes

#### PRODUCT PROFILE:




- Split components for ease of installation
- Light gland offers greater speed capability than conventional sets
- Pressure sensitive lip design minimizes friction and extends service life
- Material combinations designed for use in both new and worn equipment

STACKED SEALS

# 11K

## Split, Dual-Component Hydraulic Rod Seal

Adaptive solution for heavy-duty hydraulic cylinder. Eliminates the equipment disassembly during seal installation, wand provides sealing on worn, scored surfaces.

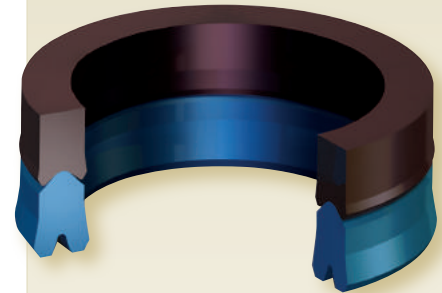

SPECIFICATIONS



Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)
AWC704 (FKM)	6 – 304.8 (1/4 – 12)	-30 – 200 (-20 – 400)	34.5 (5000)	1.5 (300)
AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	103.5 (15000)	1 (200)
AWC825 (EU)	6 – 2540 (1/4 – 100)	-40 – 85 (-40 – 185)	52 (7500)	0.5 (100)
AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	52 (7500)	0.9 (185)
AWC860 (EU)	6 – 508.0 (1/4 – 20)	-50 – 120 (-60 – 250)	103.5 (15000)	1.25 (250)

Applicable standards: DIN/ISO 5597, DIN/ISO 5597-1, DIN/ISO 7425-2

\* Please contact your Chesterton representative for larger sizes


PRODUCT PROFILES:




- Replaces the stacked set assembly
- Split design eliminates the need to disassemble equipment
- One optimized seal concept for different press applications
- Dual material combination works in both new and worn equipment
- Design eliminates shimming and future adjustments
- Fusion program

Applications


Tailored seal systems can be built on base of 11K in combination with Chesterton 9K Anti-Extrusion rings and Spacers/Stand-Off rings up. This module system allows for creating the most suitable seal kit for all kind of heavy-duty and demanding hydraulic cylinder applications and operating conditions. Flexible, modular, and custom tailored systems are an optimum solution for replacement of conventional stacked sets.

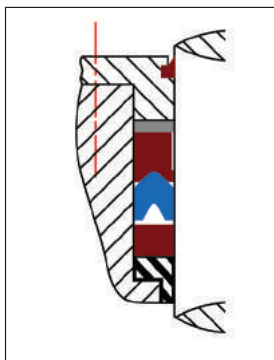


Large stuffing box depth. Backup ring (9K) protects seal (11K) against extrusion, while spacer fills up the axial space in front of the seal set.

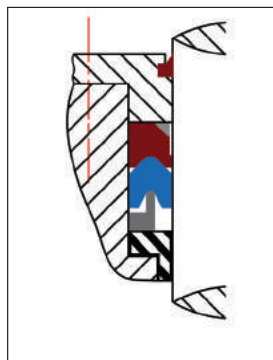

Multi-component system design for short stuffing boxes, where integrated backup ring is against extrusion. Stand-off ring supports the seal and keeps it in position (in case of floating bushing, or in vacuum).

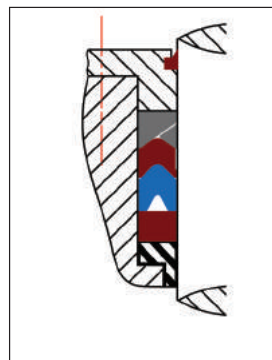

Large stuffing box depth. Customized self-aligning gland ring provides superior resistance against extrusion in case of large extrusion gap (worn bushings, worn rams).

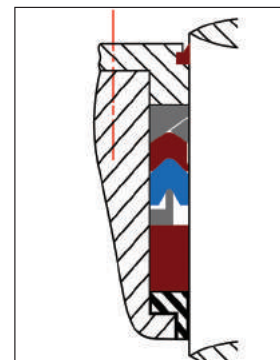


Multi-component system for replacement of traditional packing set with extra large stuffing box depth. Spacer is in combination with stand-off ring keeping the seal in position, while self-aligning gland ring protects seal against extrusion in case of large extrusion gap. (Typical applications: worn horizontal press cylinders).

U-CUP SEALS

# 22KN

## Single-Acting U-Cup Design for Rod and Piston Applications

High performance U-Cup design for hydraulic and pneumatic applications. The 10K Super Monoseal™ is made from a custom molding process that utilizes existing tooling. The 22KN design is manufactured using a machining process which allows for the flexibility to create any size based on equipment dimensions.



**SPECIFICATIONS**



Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)
AWC704 (FKM)	6 – 304.8 (1/4 – 12)	-30 – 200 (-20 – 400)	34.5 (5000)	1.5 (300)
AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	103.5 (15000)	1 (200)
AWC825 (EU)	6 – 2540 (1/4 – 100)	-40 – 85 (-40 – 185)	52 (7500)	0.5 (100)
AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	52 (7500)	0.9 (185)
AWC860 (EU)	6 – 508.0 (1/4 – 20)	-50 – 120 (-60 – 250)	103.5 (15000)	1.25 (250)

\*Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**




- Automatic sealing for optimal sealing force with minimal frictional resistance
- Flexible lip design compensates for excessive radial space in worn equipment
- Advanced material technology withstands scored, damaged surfaces
- Positive rake lip profile wipes away contamination from mating surface
- Fusion Program

# 22K

## Single-Acting, U-Cup for Rod and Piston Applications in Hydraulics

Flexible family of high performance hydraulic seals for standard and high-pressure applications.



**SPECIFICATIONS**



Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)
AWC704 (FKM)	6 – 304.8 (1/4 – 12)	-30 – 200 (-20 – 400)	34.5 (5000)	1.5 (300)
AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	103.5 (15000)	1 (200)
AWC825 (EU)	6 – 2540 (1/4 – 100)	-40 – 85 (-40 – 185)	52 (7500)	0.5 (100)
AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	52 (7500)	0.9 (185)
AWC860 (EU)	6 – 508.0 (1/4 – 20)	-50 – 120 (-60 – 250)	103.5 (15000)	1.25 (250)

Applicable standards: DIN/ISO 5597, DIN/ISO 5597-1, DIN/ISO 7425-2

\*Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**




- Single-acting, U-Cup design, zero leakage throughout the entire operating range
- Abrasion-resistant design, excellent performance in hydraulic applications
- Lip geometry stabilizes seal to prevent twisting and eases installation
- Application-specific solutions, including anti-extrusion ring, energizer, and dynamic/static lip designs

U-CUP SEALS

# 23K

## Pneumatic Seals for Rod and Piston Applications

Unique seal design incorporated with high performance, polymer technology for low friction sealing in pneumatic applications.




**SPECIFICATIONS**

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)
AWC704 (FKM)	6 – 304.8 (1/4 – 12)	-30 – 200 (-20 – 400)	0.9 (125)	1.5 (300)
AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	103.5 (15000)	1 (200)
AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	52 (7500)	0.9 (185)
AWC860 (EU)	6 – 508.0 (1/4 – 20)	-50 – 120 (-60 – 250)	103.5 (15000)	1.25 (250)

\* Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**




- Unique lip geometry provides optimal sealing force for pneumatic applications
- Radiused lip design creates a continuous lubricating film, minimizing wear
- Unique design minimizes frictional heat and energy consumption
- Eliminates “Stick-Slip” effect

COMPRESSION SEALS

# 20K™

## Heavy-Duty Bi-Directional Hydraulic Seal

Robust seal design combined with high performance polymer technology for most demanding heavy-duty, high-pressure applications.




**SPECIFICATIONS**

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)
AWC704 (FKM)	6 – 304.8 (1/4 – 12)	-30 – 200 (-20 – 400)	34.5 (5000)	1.5 (300)
AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	103.5 (15000)	1 (200)
AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	52 (7500)	0.9 (185)
AWC860 (EU)	6 – 508.0 (1/4 – 20)	-50 – 120 (-60 – 250)	103.5 (15000)	1.25 (250)

Applicable standards: DIN/ISO 4725-1, DIN/ISO 4725-2, DIN/ISO 6547

\* Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**



- Ideal replacement for 2-, 3-, or 4-piece cap seal assemblies
- Excellent extrusion resistance
- Abrasion-resistant design withstands demanding environments
- Outstanding resistance to shock loading and pressure spikes




COMPRESSION SEALS

# Custom Cap Seals (CCS)

## Rod and Piston Seals

High performance, dual component system for bidirectional sealing in hydraulic and pneumatic applications.




SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min) Reciprocating/ Rotary
**AWC800 (EU)	6 – 1400 (1/4 – 55)	-50 – 85 (-60 – 185)	103.5 (15000)	1 (200)/0.5 (100)
**AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	52 (7500)	0.9 (185)/0.5 (100)
**AWC860 (EU)	6 – 1400 (1/4 – 55)	-50 – 120 (-60 – 250)	103.5 (15000)	1.25 (250)/0.75 (150)
***AWC300 (Glass-Filled PTFE)	up to 305 (12)	-35 – 120 (-60 – 250)	34.5 (5000)	15 (3000)/5.0 (960)
***AWC400 (Carbon-Filled PTFE)	up to 305 (12)	-35 – 120 (-60 – 250)	34.5 (5000)	15 (3000)/5.0 (960)
**AWC500 (Bronze-Filled PTFE)	up to 305 (12)	-35 – 120 (-60 – 250)	34.5 (5000)	15 (3000)/5.0 (960)

Applicable standards: DIN/ISO 4725-1 and 4725-2

PRODUCT PROFILES:




WIPER SEALS

# W21K

## Wipers for Hydraulic and Pneumatic Applications

High performance protection of hydraulic and pneumatic actuators/systems.

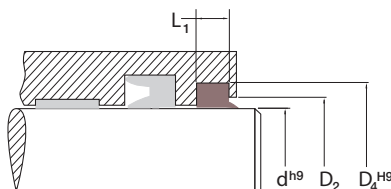



SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Speed m/s (ft/min)
AWC704 (FKM)	6 – 304.8 (1/4 – 12)	-30 – 200 (-20 – 400)	1.5 (300)
AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	1 (200)
AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	0.9 (185)
AWC860 (EU)	6 – 508.0 (1/4 – 20)	-50 – 120 (-60 – 250)	1.25 (250)

Applicable standards: DIN/ISO 6195, ISO 3320

\*Please contact your Chesterton representative for larger sizes

PRODUCT PROFILES:

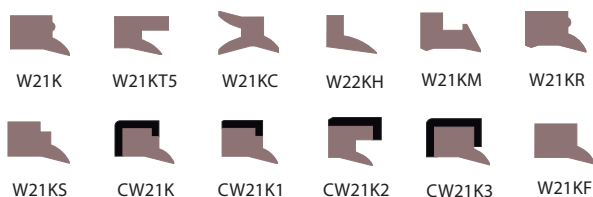


- Second generation PTFE and high performance polymers offer improved performance
- Compression seal design increases sealing force with system pressure
- Dramatically reduced friction and eliminated “Stick-Slip” effect
- Excellent chemical- and heat-resistant characteristics

\*Please contact your Chesterton representative for larger sizes.

\*\*Buna energizer

\*\*\*FKM energizer




- Positive rake lip design effectively wipes contaminants away from surface
- Minimizes scoring and system contamination
- Abrasion-resistant design withstands demanding environments
- Prolongs lifetime of equipment and components

WIPER SEALS

# WCCS

## Double-Acting Wipers for Hydraulic and Pneumatic Applications

High performance protection and residual oil film obstruction on rods and rams. Built-in O-Ring energizer can compensate either possible side movement or deflection of the rod.

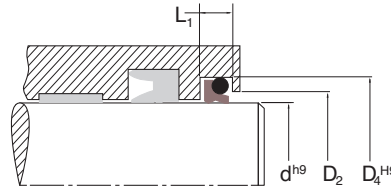

**SPECIFICATIONS**

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Speed m/s (ft/min) Reciprocating/Rotary
**AWC800 (EU)	6 – 2540 (1/4 – 100)	-50 – 85 (-60 – 185)	1 (200)/0.5 (100)
**AWC830 (EU)	6 – 254 (1/4 – 10)	-35 – 75 (-30 – 175)	0.9 (185)/0.5 (100)
**AWC860 (EU)	6 – 508.0 (1/4 – 20)	-50 – 120 (-60 – 250)	1.25 (250)/0.75 (150)
***AWC300 (Glass-Filled PTFE)	up to 600 (24)	-35 – 120 (-30 – 250)	15 (3000)/5.0 (960)
***AWC400 (Carbon-Filled PTFE)	up to 600 (24)	-35 – 120 (-30 – 250)	15 (3000)/5.0 (960)
**AWC500 (Bronze-Filled PTFE)	up to 600 (24)	-35 – 120 (-30 – 250)	15 (3000)/5.0 (960)


Applicable standards: DIN/ISO 4725-1 and 4725-2

\*Please contact your Chesterton representative for larger sizes.  
\*\*Buna energizer  
\*\*\*FKM energizer

**PRODUCT PROFILES:**



WCCS



- Double-acting, abrasion-resistant design for hydraulic and pneumatic applications
- Robust lip design effectively wipes contaminants away from surface
- Obstructs residual oil film on media side
- Excellent sliding properties
- Manufacturing process allows flexibility to create any size
- Sizes made to accommodate international standards including ISO and DIN

BEARING COMPONENTS

# 16K and 17K

## Bearing Band Strips for Hydraulic and Pneumatic Applications

High performance, replaceable bearing strips for heavy-duty hydraulic cylinders and forming machines. The exceptional physical properties and built-in lubricants make it suitable for use on rams or pistons on most of reciprocating applications.

**SPECIFICATIONS**

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Compressive Strength MPa (psi) ASTM D695	Speed m/s (ft/min)
AWC640 (Thermoset Polyester Resin)	300 – 1575	-40 – 121 (-40 – 250)	345 (50,000)	1.0 m/sec (200 ft/min)

16K Metric Designs		
Cross Section (S), mm	Height (H <sub>1</sub> ), mm	Diameter range (d/D), mm
2.5 4.0	15	300 – 1.575
	20	300 – 1.575
	25	300 – 1.575
	30	300 – 1.575


17K Inch Designs		
Cross Section (S), Inch	Groove Width (L), Inch	Diameter Range (d/D), Inch
0.125	1	12 – 62
0.375	1.5	12 – 62
0.500		
0.625	2	12 – 62
0.750		

**PRODUCT PROFILES:**



16K

17K




- Prevents metal-to-metal scoring, helps prolong equipment life
- Reduces radial movement, extends seal life
- Built-in lubricant for lower coefficient of friction between mating surfaces
- Split continuous coil accommodates large diameter equipment

BEARING COMPONENTS

# 18K and 19K

## Bearing Bands for Hydraulic and Pneumatic Applications

High performance replaceable bearing bands for cylinders.



SPECIFICATIONS


Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Compressive Strength MPa (psi) ASTM D695	Speed m/s (ft/min)
AWC660 (40% Glass-Filled Nylon)	Up to 508 (to 20)	-40 – 121 (-40 – 250)	158.8 (23 000)	1.25 (250)

19K Metric Designs		
Cross Section (S), mm	Height (H <sub>1</sub> ), mm	Diameter range (d/D), mm
2.5	5	20 – 140
	9	55 – 220
	14	70 – 400
	24	315 – 400

18K Inch Designs		
Cross Section (S), Inch	Height (H <sub>1</sub> ), Inch	Diameter Range (d/D), Inch
0.125	0.375	1 – 4
0.375	0.500	1.5 – 6
0.500	0.750	3.5 – 8
0.625	0.750	3.5 – 8
0.750	1.000	4 – 20

\*Please contact your Chesterton representative for larger sizes

PRODUCT PROFILES:




- Heat-stabilized nylon—the same carrying load as bronze
- Replaceable bearings prevent metal-to-metal contact and prolong equipment life
- Reduces radial movement, therefore extending seal life
- Split design minimizes downtime

# WR

## Bearing Bands for Hydraulic and Pneumatic Applications

Custom bearing bands for hydraulic and pneumatic applications.




SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Compression Strength MPa (psi) ASTM/ISO Testing	Speed m/s (ft/min)
AWC630 (Unfilled PEEK)	25 – 152 (1 – 6)	-45 – 175 (-50 – 350)	138.1 (20000) ASTM D695	1 (200)
AWC635 (Glass-Filled PEEK)	25 – 152 (1 – 6)	-45 – 175 (-50 – 350)	179.5 (26000) ASTM D695	1 (200)
AWC650 Acetal (POM)	25 – 381 (1 – 15)	-31 – 73 (-25 – 165)	55.2 (8000) ASTM D695	1 (200)
AWC665 (Nylon with MoS <sub>2</sub> )	381 – 1450 (15 – 57)	-40 – 105 (-40 – 212)	96.7 (14000) ISO 604	1 (200)

Applicable standards: DIN/ISO 10776

\*Please contact your Chesterton representative for larger sizes.  
\*\*Other materials are available upon request.

PRODUCT PROFILES:





- Replaceable bearings, a cost-effective method for improving equipment performance
- Reduces radial movement, prevents metal-to-metal contact, while extending seal life
- Custom wear rings eliminate unnecessary modifications
- Machining process allows the flexibility to create any size

ANTI-EXTRUSION RINGS

# 9K

## Anti-Extrusion Rings for Hydraulic Applications

Designed to prevent seals from extruding into equipment clearances for heavy-duty, high-pressure applications.



**SPECIFICATIONS**

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)
AWC520 (Virgin PTFE)	6 – 600 (1/4 – 24)	Cryogenic to 230 (Cryogenic to 450)
AWC650 (Acetal)	6 – 381 (1/4 – 15)	-30 – 90 (-20 – 200)
AWC665 (Nylon with MoS <sub>2</sub> )	>381 – 1450 (>15 – 57)	-40 – 105 (-40 – 212)
AWC663 (PA-6)	6 – 600 (1/4 – 24)	-40 – 105 (-40 – 212)

\* Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**



R9K  
P9K




- Prevents extrusion of sealing element into equipment clearances: improves MTBR
- Machining process allows the flexibility to create any size
- Available in various profiles and materials
- Split design for ease of installation

ROTARY SEALS - BEARING AND GEARBOX PROTECTION

# 33K

## Split Bearing and Gearbox Protection

Unitized split seal for bearing and gearbox protection.



**SPECIFICATIONS**

Material (combination) Adapters/Sealer Rings	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)	Recommended Use	Mating Surface (Rockwell C)
<b>AWC800 Adapters (EU)</b>						
AWC100 (PTFE) Polyimide	25 – 610 (1 – 24)	85 (185)	0,007 (1)	12.7 (2500)	Excellent dry Excellent low viscosity	≥45
AWC300 (PTFE) Molybdenum and Glass	25 – 610 (1 – 24)	85 (185)	0,007 (1)	12.7 (2500)	Excellent high viscosity Good dry and good in water	≥55
AWC400 (PTFE) Carbon and Graphite	25 – 610 (1 – 24)	85 (185)	0,007 (1)	12.7 (2500)	Excellent in water Good dry and low viscosity	≥55
<b>AWC860 Adapters (EU)</b>						
AWC100 (PTFE) Polyimide	25 – 457 (1 – 18)	121 (250)	0,007 (1)	12.7 (2500)	Excellent dry Excellent low viscosity	≥45
AWC300 (PTFE) Molybdenum and Glass	25 – 457 (1 – 18)	121 (250)	0,007 (1)	12.7 (2500)	Excellent high viscosity Good dry and good in water	≥55
AWC400 (PTFE) Carbon and Graphite	25 – 457 (1 – 18)	121 (250)	0,007 (1)	12.7 (2500)	Excellent in water Good dry and low viscosity	≥55

**PRODUCT PROFILES:**



33K

Applicable standards: ISO3760/ISO3761

Performance depends on concurrent conditions including shaft hardness, shaft surface roughness, material, lubrication, temperature, and pressure.

\* Please contact your Chesterton representative for larger sizes



- Split design eliminates the need for equipment disassembly
- New design and materials proven to outperform conventional lip seals
- Patented design combines high performance PTFE and polymer materials
- Filled PTFE materials provide high wear and abrasion resistance

ROTARY SEALS - BEARING AND GEARBOX PROTECTION

# 30K

## Advanced Lip Seal

### Bearing and Gearbox Protection

Advanced sealing protection technology keeps the lubricant in and the dirt out for long-term sealing.

Chesterton 30K lip seals are high performance lip seals that are ideal for dynamic rotary seal applications. These seals block penetration of external contaminants from entering the housing and provide excellent service in bearing and gearbox applications that utilize conventional oil lip seals.

The 30K is manufactured individually, using our unique machining process, which eliminates the need for tooling costs associated with new sizes. The 30K is offered in other unique designs based on your application requirements—whether a built-in wiper is required or space limited.

The unique 30K lip seal design is mechanically formed to provide optimal sealing force and is available in four distinct PTFE materials developed specifically for sealing applications. The PTFE compounds, coupled with the seal design, provide excellent fluid compatibility and outstanding performance.



- New designs and materials to outperform conventional lip seals
- High performance PTFE compounds offer advanced wear and abrasion resistance
- Unique design provides lower friction and decreased shaft wear
- High performance lip seals block contaminants from entering housing

**SPECIFICATIONS**





Material (combination) Adapters/Sealer Rings	Size Range* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)	Recom- mended Use	Mating Surface (Rockwell C)
AWC100 (PTFE) Polyimide	20 – 600 (0.787 – 24)	-30 – 150 (-20 – 300)	Up to 20 (4000)	0,07 (10)	Excellent dry Excellent low viscosity No water and steam	≥45
AWC300 (PTFE) Molybdenum and Glass					Excellent high viscosity Good dry and good in water	≥55
AWC400 (PTFE) Carbon and Graphite					Excellent in water Good dry and low viscosity	≥55
AWC510 (PTFE) Mineral (FDA Listed)					Excellent dry Good in water and steam	≥45

Applicable standards: ISO3760/ISO3761  
Performance depends on concurrent conditions including shaft hardness, shaft surface roughness, material, lubrication, temperature, and pressure.

\* Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**







ROTARY SEALS - BEARING AND GEARBOX PROTECTION

# Polymer Labyrinth Seal (PLS)

## Unitized, Non-Contacting Seal for Bearing Protection

Made from Chesterton's proprietary polymer material technology, the Chesterton patented Polymer Labyrinth Seal (PLS) is a non-contact bearing seal which protects pumps, motors, gearboxes, and other rotating equipment in splash applications.



- High performance, non-contact design eliminates fretting caused by lip seals
- Keeps lubrication in and seals out external contamination
- Unitized design and durable, non-sparking material provide easy, reliable installation
- Available in a variety of configurations to meet plant-wide equipment needs
- IP56 (third party certification) designed to be resistant to dust and water

SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	Speed** m/s (ft/min)	Eccentricity mm (Inch)
AWC800 (EU)	25 – 500.8 (1 – 20)	30.5 – 85 (-60 – 185)	30.5 (6000)	0.75 (0.030)

\* Please contact your Chesterton representative for larger sizes

PRODUCT PROFILES:



PLS1



PLS2

ROTARY SEALS - STUFFING BOX SOLUTIONS

# 14K

## Restriction Bushing

A robust restriction bushing for rotating equipment.

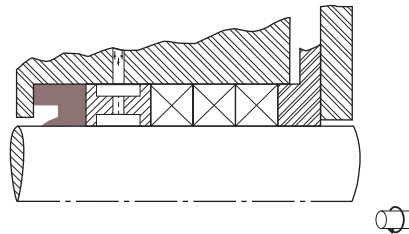

SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)	pH range
AWC520 (PTFE)	25 – 600 (1 – 24)	Up to 200 (400)	0 – 14
AWC800 (EU)	25 – 1400 (1 – 55)	-50 – 85 (-60 – 185)	4 – 10

Applicable standards: ISO 3069

\*Please contact your Chesterton representative for larger sizes.  
\*\*Contact engineering for speed beyond these limits.

PRODUCT PROFILES:



R14K

R14KRBS

R14KPF

- Split design simplifies installation
- Minimizes particles from entering the stuffing box, extending packing and seal life
- Tapered lip design controls fluid bypass
- Designed for pumps and other rotating equipment such as agitators, mixers, and refiners

ROTARY SEALS - STUFFING BOX SOLUTIONS


# 30KC

## Seal for Viscous Fluids and Powders

Chesterton 30KC polymer cartridge seals are designed for use in dynamic rotary seal applications. This cartridge design uses high performance, filled PTFE materials proven to withstand the high shear rates, frictional heat, and abrasives common when pumping high viscosity products and powders.

The 30KC high performance, filled PTFE compounds are coupled with the unique seal design to provide excellent fluid compatibility and outstanding performance. All engineered cartridges are custom manufactured to equipment dimensions, eliminating the need for equipment modifications.

The 30KC is designed with an inboard sealing element, an outboard sealing element, and built-in flushing ports. The inboard lip seals process fluid, the outboard lips seal barrier fluid, while the flush port allows for flushing. The versatile cartridge design is extremely tough and able to withstand adhesion between the sealing surfaces and shaft due to reacted material and dry running capabilities.

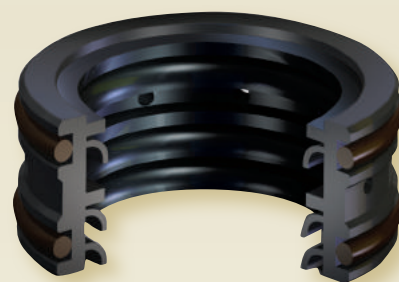

- Outperforms conventional packing, sealing viscosity fluids, and dry powders
- Decreases downtime, easy-to-install, versatile cartridge design
- Improves performance of compression packing, distinct PTFE materials
- Custom-designed cartridges made to equipment dimensions

SPECIFICATIONS



Material** (combination) Adapters/Sealer Rings	Shaft Size* mm (Inch)	Temperature °C (°F)	Pressure MPa (psi)	Speed m/s (ft/min)	Mating surface (Rockwell C)	Surface finish µm Ra (µ Inch)	Recommended use***
AWC100 (PTFE) Polyimide	25 – 200 (1 – 8)	-20 – 150 (-30 – 300)	Up to 1 (150)	Up to 5 (984)	45	Dynamic 0.2 – 0.4 (8 – 16)	<b>Excellent dry</b> Good in water or steam Chocolate and syrups No petroleum liquids
AWC300 (PTFE) Molybdenum and glass					45		<b>Excellent dry</b> Excellent low viscosity (<2000 cp) Powders, oil, resins, glues, paints No water or steam
AWC400 (PTFE) Carbon and graphite					55	Static 0.4 – 0.8 (16 – 32)	<b>Excellent high viscosity</b> (>2000 cp) Good in dry, water, or steam
AWC510 Mineral (FDA listed)					55		<b>Excellent in water or steam</b> Good dry and low viscosity Powders, asphalt, clay, slurries

Applicable standards: ISO 3069

\*Please contact your Chesterton representative for larger sizes.


\*\*Fluoroelastomer O-Rings provided (FDA listed with AWC510).

\*\*\*Runout to 0,15 mm (0.05")

PRODUCT PROFILES:



30KC





SPRING ENERGIZED SEALS

# SES 100 Series

## Cantilever Spring Design for Highly Dynamic Applications

These custom seals are primarily used in highly dynamic applications for rotary and reciprocating equipment because the spring design allows for high deflection with minimal loading. This is the most popular series for spring-energized seal designs due to unique attributes which help to maximize seal and hardware life.



- Highly dynamic applications for plant-wide usage
- Unidirectional designs, available as rod, piston, flange, or static seals
- Single-point profile yields high sealability while minimizing frictional force
- All seals made to order, no equipment modifications required
- Custom designs and materials available upon request

SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)
AWC400 (PTFE) Carbon and Graphite	1.2 – 2.032 (0.050 – 80)	-156 – 204
AWC630 PEEK™	1.2 – 254 (0.050 – 10)	(-250 – 400)
AWC610 UHMWPE	1.2 – 2.032 (0.050 – 80+)	-73 – 204

\*Please contact your Chesterton representative for larger sizes


PRODUCT PROFILES:



# SES 200 Series

## Elliptical Coil Design Accommodates Excessive Tolerances or Misalignment

Elliptical coil spring-energized seals are commonly used in rotary, reciprocating, and static applications where hardware tolerances are relatively large or a miniature seal is required. Elliptical coil spring designs allow for minimal deflection while applying intermediate loads.



- Designed to accommodate equipment with large tolerances; plant-wide usage
- Unidirectional design; accommodates excessive tolerances or misalignment
- All seals made to order; no equipment modifications required
- Miniature profiles; accommodates small equipment
- Available as internal, external, or pressure face seals

SPECIFICATIONS

Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)
AWC400 (PTFE) Carbon and graphite	1.2 – 2.032 (0.050 – 80)	-156 – 204 (-250 – 400)
AWC630 PEEK	1.2 – 254 (0.050 – 10)	-73 – 204 (-100 – 400)
AWC610 UHMWPE	1.2 – 2.032 (0.050 – 80+)	-253 – 82 (-425 – 180)

\*Please contact your Chesterton representative for larger sizes.

PRODUCT PROFILES:





SPRING ENERGIZED SEALS

# SES 300 Series

## Helical Wound Design for Slow Speed/Static Applications

This custom seal has excellent loading capabilities with minimal deflection, making it ideal for use in static applications, slow speeds, extremely low temperatures, and/or infrequent dynamic conditions when friction and wear are secondary concerns.

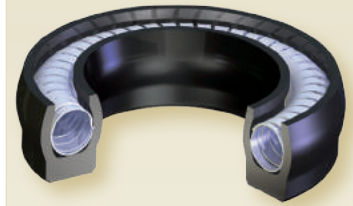


**SPECIFICATIONS**



Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)
AWC400 (PTFE) Carbon and Graphite	1.2 – 2.032 (0.050 – 80)	-156 – 204 (-250 – 400)
AWC630 PEEK™	1.2 – 254 (0.050 – 10)	-73 – 204 (-100 – 400)
UHMWPE	1.2 – 2.032 (0.050 – 80+)	-253 – 82 (-425 – 180)

\* Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**





- Unidirectional design for slow speed and static applications
- Helical wound spring design with high-load minimal deflection
- Concentrated load design when friction and wear are secondary concerns
- All seals made to order; no equipment modifications required
- Custom designs and materials available upon request

# SES 500 Series

## High-Performance, Multi-Purpose V-Rings

These stacked V-Rings sets are specifically designed to accommodate hardware with deep stuffing boxes. They are used in both rotary and reciprocating applications and are available in solid and split designs, depending upon your application requirements.



**SPECIFICATIONS**



Material (designation)	Size Range* mm (Inch)	Temperature °C (°F)
AWC400 (PTFE) Carbon and Graphite	1.2 – 2.032 (0.050 – 80)	-156 – 204 (-250 – 400)
AWC630 PEEK™	1.2 – 254 (0.050 – 10)	-73 – 204 (-100 – 400)
UHMWPE	1.2 – 2.032 (0.050 – 80+)	-253 – 82 (-425 – 180)

\* Please contact your Chesterton representative for larger sizes

**PRODUCT PROFILES:**



- Unidirectional design accommodates hardware with deep stuffing boxes
- Multi-purpose stacked sets available in solid and split designs
- All seals made to order; no equipment modifications required
- Custom designs and materials available upon request

## Oils Product Selection Guide

Industrial Grade Oil								
Name	Base Oil	ISO VG (ASTM D2422)	Operating Temperature	Specific Gravity	Viscosity @ 40 C (cSt) (ASTM D445)	Viscosity @ 100 C (cSt) (ASTM D445)	Viscosity Index (ASTM D2270)	Pour Point (ASTM D97)
601	Mineral	22	-23°C – 150°C (-10°F – 300°F)	0.90	22	4	58	-25°C (-13°F)
610 HT	Synthetic POE	460	-25°C – 250°C (-15°F – 482°F)	0.97	473	71	230	-40°C (-40°F)
610 Plus	Synthetic POE	68	-25°C – 270°C (-15°F – 520°F)	0.99	68	11	130	-45°C (-49°F)
610 MT Plus	Synthetic POE	220	-25°C – 270°C (-15°F – 520°F)	0.98	220	22	130	-25°C (-13°F)
652	Mineral	22	-23°C – 150°C (-10°F – 300°F)	0.90	22	4	58	-25°C (-13°F)

Food-Grade Oil								
Name	Base Oil	ISO VG (ASTM D2422)	Operating Temperature	Specific Gravity	Viscosity @ 40 C (cSt) (ASTM D445)	Viscosity @ 100 C (cSt) (ASTM D445)	Viscosity Index (ASTM D2270)	Pour Point (ASTM D97)
690 FG	Mineral	22	-9°C – 120°C (16°F – 248°F)	0.88	22	<4	58	-40°C (-40°F)
715	Semi-Synthetic	N/A	N/D	0.89	9600	393	179	N/D

## Greases Product Selection Guide

Industrial Grade Grease									
Name	Thickener	Base Oil	NLGI Grade	Base Oil Viscosity	Dropping Point ASTM D2265	Service Temp	Four Ball Wear Weld Load, ASTM D2596	Water Washout Resistance ASTM D1264	Corrosion Resistance ASTM B117
613 Moly Grease	Lithium Complex	Mineral	2	150	304°C (580°F)	-18°C – 150°C (0°F – 302°F)	500 kg	<1.0	300 hours @50 microns
615 HTG #1	Calcium Sulfonate Complex	Mineral	1	100	300°C (572°F)	-45°C – 204°C (-50°F – 400°F)	620 kg	<1.0	>1000 hours @50 microns
615 HTG #2	Calcium Sulfonate Complex	Mineral	2	100	318°C (604°F)	-40°C – 204°C (-40°F – 400°F)	620 kg	<0.05	>1000 hours @50 microns
615 HTG #2-460	Calcium Sulfonate Complex	Mineral	2	460	300°C (572°F)	-40°C – 204°C (-40°F – 400°F)	620 kg	<3.0	>1000 hours @50 microns
635 SXC	Calcium Sulfonate Complex	Synthetic (PAO)	2	100	318°C (604°F)	-40°C – 240°C (-40°F – 464°F)	800 kg	<0.05	>1000 hours @50 microns

Food -Grade Grease									
Name	Thickener	Base Oil	NLGI Grade	Base Oil Viscosity	Dropping Point ASTM D2265	Service Temp	Four Ball Wear Weld Load, ASTM D2596	Water Washout Resistance ASTM D1264	Corrosion Resistance ASTM B117
625 CXF	Calcium Sulfonate Complex	Mineral	2	100	318°C (604°F)	-30°C – 204°C (-22°F – 400°F)	620 kg	<0.05	>1000 hours @50 microns
630 SXCF	Calcium Sulfonate Complex	Synthetic (PAO)	2	40	318°C (604°F)	-40°C – 240°C (-40°F – 464°F)	620 kg	<0.05	>1000 hours @50 microns
630 SXCF 220 #1	Calcium Sulfonate Complex	Synthetic (PAO)	1	220	316°C (600°F)	-40°C – 240°C (-40°F – 464°F)	400 kg	1.0	>1200 hours @50 microns



## INDUSTRIAL OILS

# 610 Plus, 610 MT Plus, 610 HT

## Synthetic Lubricating Fluid—High-Temperature Service

Premium-quality, 100% synthetic fluid that cleans as it lubricates over a wide temperature range of -25°C – 270°C (-15°F – 520°F).

### Product Characteristics

- Low evaporation
- Low-carbonizing
- High-detergency—self-cleaning
- E.P. additives increase load carrying ability
- **Available Container Sizes:**  
3.8 l (1 gal) 610 Plus/610 HT only,  
20 l, 208 l

### Applications

- Equipment operating at elevated temperatures
- Refrigerated areas
- Severe environments
- Oven and high-temperature chains
- Gearboxes



Typical applications include oven chains, gearboxes, chain conveyors, drying ovens, heat treating conveyors, ceramic ovens, conveyor roller bearings, electric motors, anti-friction bearings, and impregnated bearings.

### Technical Data 610 Plus

ISO VG (ASTM D2422, DIN 51 519)	68
Temperature Range	-25°C – 270°C (-15°F – 520°F)
Flash Point	310°C (590°F)

### Technical Data 610 MT Plus

ISO VG (ASTM D2422, DIN 51 519)	220
Temperature Range	-25°C – 270°C (-15°F – 520°F)
Flash Point	>290°C (>554°F)
Four Ball Wear Test (ASTM D2266, DIN 51 350/5) Scar Diameter	0.39 mm

### Technical Data 610 HT

ISO VG (ASTM D2422, DIN 51 519)	460
Temperature Range	-25°C – 250°C (-15°F – 482°F)
Flash Point, C.O.C. (ASTM D92, ISO 2592)	225°C (437°F)
Four Ball Wear Test (ASTM D2266, DIN 51 350/5) Scar Diameter	0.35 mm



- Reduces lubricant consumption
- Reduced equipment cleaning and downtime
- Reduces energy consumption
- Increases equipment life

INDUSTRIAL OILS

# 650 AML

## Advanced Machinery Lubricant

### High-Performing, Readily Biodegradable

Chesterton 650 AML is a high-performing, readily biodegradable lubricant designed to creep into internal workings of chains, cables, pneumatics, needle bearings, and sliding mechanisms. It is engineered with a unique ester blend of plant-based natural and synthetic technology making it environmentally friendly and worker safe.

650 AML penetrates deep into valves, pistons, and other pneumatic components to protect against friction and wear improving energy efficiency. Inherent detergency in this lubricant disperses dirt and debris, and removes gums and varnish prolonging the life of chains, cables and mechanical equipment. It improves the efficiency of automatic lubrication systems by eliminating trace moisture and contaminants from distribution lines, controls, and components.

650 AML is NSF H1 certified and is free of any animal fats, oils, and animal derived by-products.

#### Product Characteristics

- Biodegradable
- Low mist hazard, low odor
- Reduces friction and wear
- Exhibits high load and extreme pressure capabilities
- NSF H1 certified

#### Applications

- Air actuated valves, pneumatic cylinders, solenoids
- Conveyor chains, slideways, and wire ropes
- Air mist or oil injected lubricated bearings, and equipment
- Assembly, packaging, and filling machines



#### Technical Data

ISO VG (ASTM D 2422, DIN 51 519)	22
Temperature Range	21°C – 200°C (-6°F – 392°F)
Flash Point (ASTM D 93, DIN 51 755)	211°C (412°F)
Four Ball Wear Test (ASTM D 4172)	
Scar Diameter	0.395 mm
Four Ball EP Test (ASTM D 2783) Weld Load	1961 N, 200 kg
Pin and Vee Block (ASTM D 3233)	
Failure Load, Max	17587 N, 1793 kgf
Torque	4.61 N-m
Coefficient of Friction	0.05



- Self-cleaning, removes residue and sticky build up
- Low friction, significantly reduces power consumption
- Reduces wear, prolongs equipment life
- Environmentally safe ester technology
- Free of any animal fats, oils, and animal derived by-products

#### Available Sizes

475 ml, 20 l, and 208 l

INDUSTRIAL OILS

# 601

## Chain Drive Pin and Bushing Lubricant

Premium-quality, light oil that penetrates between the close clearance of chain drive bushings and pins to provide critical lubrication.

### Product Characteristics

- Rapid penetration
- E.P. additives increase load carrying ability
- No dirt and dust buildup
- No sticky lubricant residues
- Long-lasting, non-drying film
- -23°C – 150°C (-10°F – 300°F)

Available Container Sizes: Aerosol, 3.8 l (1 gal), 20 l, 208 l

### Applications

- Chain-driven machinery
- Conveyors
- Packaging equipment
- Hoist chains
- Forklift trucks
- Chain saws



- Increases chain life
- Reduces lubricant consumption
- Reduces energy consumption
- Creeps into pins and bushings
- Can be used with Spraflex® 715 or 715 Gold in severe wet conditions

# 652

## Pneumatic Lubricant and Conditioner

High performance, low-viscosity formulation reduces up to 90% of pneumatic maintenance costs, decreases downtime and rejects. Cleans, protects, and prolongs the life of pneumatic equipment.

### Product Characteristics

- Will not cause sludge buildup
- Prevents seals/O-Rings from drying out
- Reduces power consumption
- Cleans rust, sludge, and dirt from all air tools as it lubricates
- -23°C – 150°C (-10°F – 300°F)

Available Container Sizes: 475 ml, 20 l, 208 l

### Applications

- Air tools
- Cylinders
- Air line lubricators
- Air impact wrenches, hammers, drills
- Production air systems
- CNC machines
- Robotics
- Assembly line tools



- Lowers friction and reduces air cost
- Cleans and lubricates
- Prevents corrosion
- Disperses dirt and dust

# 690 FG

## Food-Grade Lubricant

High quality, multi-purpose penetrating lubricant used throughout food and beverage facilities to prolong the life of machinery and parts while reducing costs.

### Product Characteristics

- Clear, colorless, odorless
- Safe and easy to use in bulk or aerosol
- -9°C – 120°C (15°F – 250°F)
- NSF registered H1

Available Container Sizes: Aerosol, 3.8 l (1 gal), 20 l, 208 l

### Applications

Food, beverage, and pharmaceutical processing equipment, including

- Chain drives
- Pistons
- Valves
- Rollers
- Pneumatics



- Safe to use
- Reduces energy consumption
- Increases equipment life

INDUSTRIAL OILS

# 720 CCG

## Chain, Cable, Gear Lubricant

### Extreme Pressure, Water and Corrosion Resistant

Chesterton® 720 CCG is a multi-use, off-white translucent, polymer-modified synthetic lubricant. This product is well suited for applications requiring a high-pressure resistance and a durable film to protect equipment.

Due to high shear strength and self-adhering film, 720 CCG will not fling off or extrude like ordinary oils and greases. Chesterton 720 CCG forms a robust “wear shield” which stays in place even under the most extreme pressures. The contact surfaces are cushioned, thereby extending life of chains, sprockets, wire ropes, and gear drives.

720 CCG lubricant’s anti-corrosion action and water resistance protect chains, wire ropes, and gears exposed to moisture and corrosive liquids and vapors, far exceeding conventional grease technology.

**Product Characteristics**

- High pressure resistant
- Water and corrosion resistant
- Shear Stable lubricant
- Light color, translucent film; off-white
- NSF registered H1

**Applications**

- Chain drives/sprockets
- Small pitch open gears
- Hoists/cranes, wire ropes/cables
- Oven chains and chain conveyors
- Worm drive gearboxes, motor-operated valves



- Lubrication and protection in one product
- Polymer-modified synthetic base
- Self-adhering, non-dripping lubricant

**Available Sizes**

20 l and 208 l



**Technical Data**

**720 CCG**

**720 CCG with Diluent**

ISO VG (ASTM D 2422)	680	680
Texture	Tacky, Semi-Fluid Grease	Tacky, Thixotropic Fluid
Color	Off-white	Off-white
Apparent Viscosity, Brookfield, @25°C	150000 cPs	6200 cPs
Four Ball Weld (ASTM D 2596, DIN 51 350/4) Weld Load	800 kgf (1763 lbf)	800 kgf (1763 lbf)
Four Ball Wear (ASTM D 2266, DIN 51 350/5) Scar Diameter	0.57 mm	0.57 mm
Corrosion Resistance, 5% NaCl (ASTM B117)	>1000 hrs. @50 micron thickness	>1000 hrs. @50 micron thickness



INDUSTRIAL OILS

# 715 Spraflex® and 715 Spraflex® Gold

## Adhesive Surface Lubricant to Protect Gears, Sprockets, Chains, and Wire Ropes

A surface lubricant for chain drives, open gears, and wire rope. Provides a long-lasting, non-extruding "wear shield" to protect equipment operating under heavy loads.

### Product Characteristics


- No lubricant squeeze-out
- Non-drip
- Self-adhering, flexible lubricant
- Resistant to acid fumes
- Guards against rust and corrosion

**Available Container Sizes:** Aerosol, 20 l, 208 l  
715 Gold also comes in 3.8 l (1 gal)

### Applications

- Chains
- Open gears
- Wire ropes and cables
- Equipment in wet or underwater environment

**Note:** Use Chesterton's 715 Spraflex Gold where a clean, non-staining film is needed

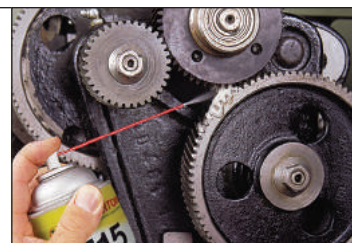

- Reduces lubricant consumption
- Water-resistant
- Provides long-term equipment life
- Can be used with 601 Chain Drive and Pin Bushing Lubricant

INDUSTRIAL GREASES

## 613

### Moly Grease

Long-lasting, multi-purpose, extreme pressure grease; fortified with molybdenum disulfide to handle challenging applications ranging from -18°C – 150°C (0°F – 302°F).

### Product Characteristics

- Speed Factor  $D_m$  40°C – 100°C (104°F – 212°F)  
100000 – 400000
- Corrosion inhibitors protect lubricated equipment
- Excellent mechanical stability
- Withstands shock and vibration at startup and shutdown

**Available Container Sizes:** 400 g, 18 kg

### Applications

- Conveyors
- Plain and anti-friction bearings
- Pumps
- Generators



- Withstands shock and vibration
- Prolongs the life of parts and machinery
- Superior water resistance

## 615 High Temperature Grease

### Available in Three Formulations: #1, #2, #2-460

High performance, corrosion-inhibited grease with outstanding extreme pressure capabilities and excellent water washout resistance.

Temperature limit -40°C (-40°F) – 204°C (400°F).

### Product Characteristics

- Superior water resistance
- Excellent corrosion protection
- Compatible with most popular greases
- Exceptional shear resistance
- Antioxidants prevent hardening
- QBT™ Quiet Bearing Technology

### Available Container Sizes:

615 HTG #1: 400 g, 18 kg, 55 kg, 180 kg  
615 HTG #2: 400 g, 18 kg, 55 kg, 180 kg  
615 HTG #2-460: 400 g, 18 kg, 180 kg

### Applications

- High water, temperature environment plants including**
- Pulp and paper mills
  - Mining operations
  - Steel, aluminum, and metal processing
  - Marine
  - Power
  - Water and wastewater



- Extends bearing life
- Reduces downtimes
- Increases productivity
- Reduces grease consumption



INDUSTRIAL GREASES

# 625 CXF

**Corrosion-Resistant, Extreme-Pressure Food Grease**

High performance, corrosion-inhibited grease with outstanding extreme-pressure capabilities and excellent water washout resistance.

Temperature limit -30°C – 204°C (-22°F – 400°F)

**Product Characteristics**

- Speed Factor D<sub>m</sub> 40°C – 100°C (104°F – 212°F) 50000 – 300000
- Excellent water washout
- Corrosion resistant
- NSF registered H1

Available Container Sizes: 400 g, 18 kg, 55 kg

**Applications**

- Processing and packaging machinery
- Slides
- Grease lubricated chains
- Bottle and carton filling machines
- Paste and sauce fillers
- Conveyor belts
- Rollers
- Canning machinery



- Nearly impervious to water and steam
- Complies with sections 178.3570 of FDA food additives regulations

# 630 SXCF, 630 SXCF 220 #1

**Synthetic, Extreme-Pressure, Corrosion-Resistant Food Grease**

High performance, food-grade, corrosion-inhibited grease with outstanding extreme pressure capabilities and excellent water washout resistance.

Temperature limit -40°C – 240°C (-40°F – 464°F).

**Product Characteristics**

- Superior water washout resistance
- Excellent corrosion protection
- Compatible with most popular greases
- Exceptional shear resistance
- Antioxidants inhibit hardening or crystallization
- NSF registered H1

**Available Container Sizes:**

630 SXCF: Aerosol, 400 g 18 kg, 55 kg  
630 SXCF 220 #1: 400 g 18 kg, 55 kg, 180 kg

**Applications**

- Food, pharmaceutical, beverage industries
- Processing and packaging machines
- Bottling equipment
- Fruit feeders
- Paste and sauce fillers
- Canning machinery
- Meat packaging equipment
- Carton filling equipment
- Use 630 SXCF 220 #1 on larger bore bearings >75 mm (>3")



- Extends bearing life
- Reduces downtimes
- Increases productivity
- Reduces grease consumption

# 635 SXC

**Synthetic, Extreme-Pressure, Corrosion-Resistant Grease**

High performance, corrosion-inhibited grease with outstanding extreme pressure capabilities and excellent water washout resistance; 635 is synthetic-based and offers superior high-temperature stability and resistance to steam and corrosive chemicals. Temperature limit -40°C – 240°C (-40°F – 464°F).

**Product Characteristics**

- Superior water washout resistance
- Excellent corrosion protection
- Compatible with most popular greases
- Exceptional shear resistance
- Antioxidants inhibit hardening or crystallization

Available Container Sizes: 400 g, 18 kg, 55 kg, 180 kg

**Applications**

- Electric motors
- HVAC/fans and blowers
- Conveyor bearings
- Mixers, agitators, and pumps
- Guides/slides



- Extends bearing life
- Reduces downtimes
- Increases productivity
- Reduces grease consumption

ANTI-SEIZES

# 725

## Nickel Anti-Seize Compound

A high performance, nickel-based anti-seize that combines the extreme pressure, corrosion-resistant, anti-seize abilities of colloidal nickel in an oil suspension that can withstand temperatures up to 1425°C (2597°F).

### Product Characteristics

- Ultra-fine particles
- Guards against galling and corrosion
- Protects against self-welding
- Withstands extreme pressure
- Up to 1425°C (2597°F)

Available Container Sizes: Aerosol, 250 g, 500 g, 20 l (24 kg)

### Applications

Covers all industries

Mechanical assembly of:

- Bolts
- Studs
- Flanges
- Press fits
- Valve stems
- Pump sleeves
- Screws
- Bushings
- Gaskets
- Bearings



- Lubricates for assembly and disassembly
- Protects against corrosion
- No need for torque tension recalculation

# 772

## Premium Nickel Anti-Seize Compound

High performance, premium quality, nickel based anti-seize formulated specifically for the power industry. Conforms with specifications restricting the levels of halogens, sulfur, and low melting point metals.

### Product Characteristics

- Water resistant
- Guards against galling and corrosion
- Protects against self-welding
- Withstands extreme pressure
- Applicable where copper use is prohibited
- Conforms to GE D5Y0P12

Available Container Sizes: 500 g

### Applications

- Bolts
- Studs
- Flanges
- Press fits
- Valve stems
- Pump sleeves
- Turbines
- Gaskets



- Meets MIL-A-907F
- Ultra-fine particles
- Eases mechanical assembly and disassembly

# 783 ACR

## Corrosion-Resistant Anti-Seize

783 combines high performance, industrial anti-seize performance with extreme corrosion protection and water washout resistance. 783 is ideal when the primary cause of bolt seizure is corrosion.

### Product Characteristics

- Eases disassembly up to 900°C (1652°F)
- Fills in microscopic voids
- No toxic heavy metals
- For extreme pressure up to 8928 kg/cm<sup>2</sup> (127000 psi)
- Safer than traditional metallic-based anti-seizes

Available Container Sizes: 250 g, 500 g, 20 l (24 kg)

### Applications

Covers all industries

- Bolts
- Screws
- Studs
- Pipe threads
- Press fits
- Pump sleeves



- Extreme corrosion protection and water washout resistance
- Lubricates for assembly and disassembly

ANTI-SEIZES

# 785/785 FG

## Parting Lubricant

The “new generation” anti-seize compound contains a blend of ultra-fine, inorganic solid lubricants in a non-carbonizing, ashless synthetic carrier. Withstands severe temperature and pressure conditions to assist in disassembly of threaded parts.

### Product Characteristics

- Eases disassembly up to 1204°C (2200°F)
  - Fills in microscopic voids
  - No toxic heavy metals
  - For extreme pressures up to 4730 kg/cm<sup>2</sup> (67570 psi)
  - 785 FG is NSF registered H1
- Available Container Sizes:**  
 785: Aerosol, 200 g, 250 g, 500 g, 20 l (24 kg)  
 785 FG: 250 g, 500 g

### Applications

- Covers all industries**
- Bolts
  - Screws
  - Studs
  - Pipe threads
  - Press fits
  - Pump sleeves
  - Use 785 FG for all food, beverage, and pharmaceutical applications
  - 785 FG has extreme pressure capabilities up to 10609 kg/cm<sup>2</sup> (150000 psi)



- Lubricates for assembly and disassembly
- Protects against corrosion
- No need for torque tension recalculation

MAINTENANCE SPECIALTIES

# 390

## Cutting Oil

A heavy-duty, multi-purpose, oil-based cutting fluid to provide maximum tool life and superior parts finish. The high viscosity oil clings to drills, taps, bores, etc. and will provide maximum friction reduction. Available in aerosol format only.

### Product Characteristics

- Use on hard or soft ferrous metals
  - Powerful extreme pressure additives
  - Provides maximum tool life
  - Excellent part finish
  - Clings to vertical and overhead surfaces
  - No unpleasant odors
  - NSF registered H2, U2
- Available Container Sizes:** Aerosol

### Applications

- Broaching
- Boring
- Drilling
- Sawing
- Reaming
- Milling
- Pipe threading
- Countersinking



- Cleaner cuts
- Deters metal-to-metal microwelding, galling, and built-up edges
- Protects from rust

# 723/723 FG Sprasolvo™

## Penetrating Oil

Fast-acting, penetrating oil in a convenient, non-flammable propellant aerosol can. Excellent for hard to reach areas where rust, tar, grease, and dirt may prevent easy removal of nuts, bolts, and fittings.

### Product Characteristics

- Pinpoint spray
  - Safe on plastic and painted surfaces
  - Aromatic free
  - Creeps into microscopic spaces
  - Optimize bolting reliability with Chesterton 783 ACR or 785 Parting Lubricant
- Available Container Sizes:** 723: Aerosol  
 723 FG: Aerosol

### Applications

- Use on all corroded or seized threaded assemblies in the harshest industrial environments
- Use 723 FG for food, beverage, and pharmaceutical applications



- Single function—optimizes performance
- Fast-acting
- Contains no harsh solvents

MAINTENANCE SPECIALTIES

# 730 Spragrip®

## Belt Dressing

Superior, energy-efficient belt dressing in a convenient aerosol package. Lengthens life of leather, rubber, canvas, or plastic belts; reduces belt slippage for all V, flat, and round belts.

### Product Characteristics

- Eliminates slippage
- No glazing or hardening
- Non-staining
- Preserves belts in inventory
- No rosins, asphalt, or hard solvents
- NSF registered P1

Available Container Sizes: Aerosol

### Applications

- Belt drives
- Fans
- Conveyor belts
- Generators
- Pumps
- Compressors



- Waterproofs and prevents slipping even under the most humid conditions
- Extends belt life

# 740 and 775

## 740 Heavy-Duty Rust Guard and 775 Moisture Shield

These corrosion-preventative coatings provide heavy-duty metal protection for all areas constantly exposed to humidity and corrosive fumes—without critical surface preparation. For inventory part needs:

- Short-term—775 is a thin, oily film for protection up to six months
- Long-term—740 is a thick, waxy film for protection up to two years

### Product Characteristics

- Self-healing, if scratched
  - Transparent brown
- Available Container Sizes:  
 740: Aerosol, 3.8 l (1 gal), 20 l, 208 l  
 775: Aerosol, 20 l, 208 l

### Applications

- Molds, castings, and tooling
  - Parts in process
  - Parts in storage
  - Pumps, valves, flanges, and pipe work
  - Indoor structural steel
- Note:** Product can be easily removed with Chesterton's 276 Electronic Component Cleaner or 274 Industrial Degreaser



- Provides up to two years corrosion protection under sheltered outdoor conditions
- Does not peel or flake
- Excellent resistance to acid, alkali, and salt air fumes

# 752

## Cold Galvanizing Compound

Zinc rich primer or final protective coating for metals exposed to atmospheric or corrosive conditions. The one-part system provides three types of corrosion protection: barrier, galvanic, and zinc oxide. A quick, cost-effective way to cold galvanize parts and finished product.

### Product Characteristics

- Fast drying
  - Self-healing
  - One-part system
  - Paintable
  - Conforms to MIL-P-46105, MIL-P-21035, and MIL-P-26915
- Available Container Sizes: Aerosol, 2.7 kg

### Applications

- Steel and iron surface/structures
- Structural steel tanks
- Transmission towers
- Underground pipelines
- Automotive bodies
- Marine equipment
- Mining equipment
- Metal roofs
- Welds
- Ducts



- 95% pure zinc in dried film
- Three way corrosion protection



MAINTENANCE SPECIALTIES

# 763 Rust Transformer®

## Surface Conversion Rust Treatment

A mild, natural acid-based product that electrochemically transforms rust into a corrosion inhibiting protective film. Provides an excellent, low-cost alternative to sandblasting for surface preparation.

### Product Characteristics

- Cleans up with water
- No strong acids
- Biodegradable
- Forms protective film

Available Container Sizes: 3.8 l (1 gal), 20 l, 208 l

### Applications

- Coatings on storage tanks
- Auto or truck bodies
- Heavy equipment
- Pumps, motors, and valves
- Transmission line towers
- Structural steel



- Easy to apply
- No sandblasting required
- Safe for workers
- Ideal for maintenance painting service preparation

# 800 GoldEnd® Tape

## 100% Pure PTFE Sealant Tape

Heavy-duty, high-density, tear-resistant, moldable, dry PTFE sealant tape for use on metal or plastic threads, pipes, or bolts.

### Product Characteristics

- -240°C – 260°C (-400°F – 500°F)
- Seals tightly and opens easily
- Non-aging, non-hardening
- Chemically resistant
- Requires fewer wraps
- Resists tearing and breakage
- Won't clog lines
- NSF registered H1, S2

Available widths: 6.4 mm (1/4"), 12.7 mm (1/2"), 19.1 mm (3/4"), 25.4 mm (1")

### Applications

- **Liquids:** Steam, water, salt water, air, fuels, refrigerants, acids, alkalis, all solvents
- **Gases:** Hydrogen, ammonia, oxygen, propane, butane, nitrogen
- **Other:** Pneumatic and hydraulic fittings up to 690 bar (10000 psi)



- Seals with 1½ to 2 wraps—virtually all chemicals
- Adjustable by 90°, no leakage
- No waste

# 900 GoldEnd® Paste

## PTFE Thread Sealant and Lubricant

Non-hardening, non-corrosive, moldable PTFE thread sealant and lubricant for the most difficult of sealing demands on pipe joints, pneumatic fittings, and hydraulic line applications.

### Product Characteristics

- UL Listed
- Non-corrosive and non-toxic
- Safe for PVC, CPVC, plastic pipe fittings
- NSF registered H2, S2

Available Container Sizes: 200 g, 500 g, 20 l

### Applications

- Non-hardening thread sealant and lubricant for liquids, gases, or hydraulic fittings
- Ideal for stainless steel



- No volatile solvents
- Ultra-fine PTFE particles



## MAINTENANCE SPECIALTIES

# 860

## Moldable Polymer Gasketing

*Easily and economically create an ultra-thin gasket that conforms to irregular and worn-out surfaces*

Two-part, flexible gasketing material which fills in surface irregularities, stops leaks, and never sticks to surfaces after curing.

Use 860 Moldable Polymer Gasketing to handle almost every gasketing application, eliminating the need to inventory precut gaskets or sheets of gasketing. Disassembly of equipment is always easy when sealed with 860 Moldable Polymer Gasketing because it will not stick to the surface. Just peel the gasket off, no scraping is necessary.

### Product Characteristics

- Resistance to oils, water, chemicals, and solvents
- Never sticks to surfaces
- Fills voids and scratches, up to 6 mm (1/4") deep
- Remains elastic
- Temperatures up to 260°C (500°F)
- Steam pressure at 170°C (338°F) up to 6.8 kg/cm<sup>2</sup> (100 psi)

### Applications

*For sealing complex mechanical assemblies*

- Gearboxes, inspection covers, bearing housings, fittings, oil sumps and reservoirs, turbine casings, electrical boxes, vacuum systems
- Conforms to FDA standard 21CFR 175.300 and 177.2600

Caution: Not for use in contact with concentrated acids or hot concentrated caustics



### Available Sizes

Kit (includes 2 aerosols and 2 cartridges), Toolbox Kit (includes a toolbox with 2 aerosols and 2 cartridges)

### Technical Data

Cure Time\* at 25°C (77°F)

Gel time 3 – 4 hours  
(Full cure 24 hours)

Coverage per 400 grams

3 mm (1/8") bead

3289 linear cm (108 linear feet)

6 mm (1/4") bead

822 linear cm (27 linear feet)

Temperature Limit (Continuous)

-51°C – +260°C (-60°F – +500°F)

\*After application of curing agent. Cures faster at higher temperatures.



- Economical
- Creates gaskets any size and shape
- Ease of application—speeds up maintenance

## Cleaners and Degreasers Product Selection Guide

		✓+ = Excellent					
		✓ = Good	Recommended Chesterton cleaner for removal of petroleum oil				
WATER-BASED CLEANERS			SOLVENT-BASED CLEANERS				
Soil/Deposit	Heavy Oil, Adhesives, Glues	803	Surface	Paint and Plastic Safe	✓+	✓+	
	Grease, Petroleum Oil, Dirt	820	Tough Soil	Heavy Oil, Adhesives	✓	✓	✓+
Application	Natural Oils—Animal Fat, Vegetable Oil	360	Equipment and Method	Dip Tank	✓		
	Scale, Hard Water Deposits	346		Ultrasonic	✓		
	Rust and Oxidation	338		Manual Brush or Wipe	✓	✓+	✓+
				Closed Circulation, Pipeline	✓		
	Manual Brush or Wipe	820	General Purpose and Applications	Food Processing Equipment	✓+	✓	✓
Parts Degreasing Station	820	Molds, Patterns, Presses			✓+	✓+	
Dip Tank	820	Vehicles and Transportation		✓	✓	✓+	
Steam Cleaning	803	QC and Inspection			✓	✓+	
Agitated Tank	820	Textiles		✓	✓+	✓+	
Dip Tank	820	Parts Preparation Cleaning		✓	✓+	✓+	
Pressure Washing	803						
Ultrasonic	820						
Application	Parts Degreasing Shop	Closed Circulation, Pipeline	803				
		Tanks and Vessels	803				
		Food Processing Equipment	803				
		Building Structures, Floors, and Walls	820				
	Machinery/Plant Cleaning	Floor Scrubbers	820				
		Coolers, Condensers, Heat Exchangers	346				
		ELECTRICAL CLEANERS			276 Electronic Component Cleaner	279 PCS Precision Cleaning Solvent	296 Electro Contact Cleaner
		Surface	Paint and Plastic Safe	✓+	✓+	✓+	
Sensitive Metal Safe	✓+		✓+	✓+			
Soil	Grease, Petroleum Oil, Dirt	✓+	✓	✓			
Cleaning Purpose	Electrical Motors—Energized		✓+	✓			
	Electrical Motors—Non-Energized	✓	✓	✓			
	Electrical Components—Energized		✓+	✓			
	Electrical Components—Non-Energized	✓	✓+	✓			

To see all Chesterton cleaners and degreasers please go to [chesterton.com](http://chesterton.com)

# 274

### Industrial Degreaser

A hard surface degreaser for industrial and marine environments.

#### Product Characteristics

- Dissolves petroleum oil, grease, tar, and other inorganic soils
- Low odor, aromatic content
- Does not attack metal, most paints, and plastics
- Fast, penetrating action

Available Container Sizes: Aerosol, 20 l, 208 l

#### Applications

- Maintenance shops
- Dip tanks
- Hard surfaces
- Machined parts
- Recirculating and agitated parts washers



- Cost-effective
- Low evaporation, long lifetime, reduced consumption
- Improve worker safety
- High flash point

## CLEANERS AND DEGREASERS

## 276

**Electronic Component Cleaner**

*Fast evaporating, high performance, solvent-based degreaser that does not contain ozone depleting solvents.*


**Product Characteristics**

- Low residue
- Non-chlorinated
- No ozone depleting materials

**Available Container Sizes:** Aerosol, 20 l, 208 l

**Applications**

- **Spray cleaning**
- Switches, controllers, panel meters
- Circuit boards, contacts, levers
- Control panels
- **Hard surface degreasing**
- Equipment, motors
- Non-energized electrical equipment
- Parts in process

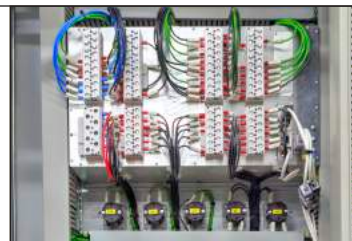

- Cleans quickly with a fast evaporation rate
- Does not attack plastic or metal

## 279 PCS

**Precision Cleaning Solvent**

*279 PCS is highly effective for use on electrical and electronic contacts and assemblies to remove light oils, particulates, grease, and other contaminants.*

**Product Characteristics**

- Non-flammable
- Fast evaporation
- Low residue
- High dielectric strength
- No ozone depleting potential
- Safe for plastic and elastomers
- NSF registered K2

**Available Container Sizes:** Aerosol

**Applications**

- Energized electrical equipment
- Control panels
- Switches
- Delicate instrumentation



- Environmentally friendly
- High purity

## 292 PDS/294 CSD

**292 Precision Degreasing Solvent/ 294 Critical Surface Degreaser**

*A general purpose, fast acting, industrial degreaser for critical equipment. Reduces maintenance and operation costs associated with downtime.*

**Product Characteristics**

- Safe on all metals
- Safe on most plastics, rubbers, and coatings
- Contains no aromatic solvents
- NSF registered C1, K1, K3
- 292 Moderate evaporation; flashpoint: 41°C (105°F)
- 294 Extremely fast evaporation; flashpoint: -18°C (0°F)

**Available Container Sizes:** 292: Aerosol  
294: Aerosol

**Applications**

- Chains and cables
- Gearboxes
- Dies and molds
- Bearings, pumps
- Air tools
- Forklifts
- Brakes and clutches
- Material handling equipment
- Parts and tools



- Removes dust, dirt, oil, and other industrial soils
- Dissolves resins, polymers, adhesives, and petroleum residues
- Leaves no residue

CLEANERS AND DEGREASERS

# 296

## Electro Contact Cleaner\*

Environmentally friendly contact cleaner for non-energized electrical and electronic contacts and assemblies to quickly remove light oils and particulates from assemblies.

**Product Characteristics**

- Low residue
- No ozone depleting potential
- Safe for plastic
- Safer to use than petroleum based products
- NSF registered K2

Available Container Sizes: Aerosol

\*Product is not available in Europe, Middle East, or Africa

**Applications**

- Switches
- Controllers
- Panel meters
- Circuit boards
- Contacts
- Levers



- Fast evaporation
- High dielectric strength
- No rinsing required

# 803

## Industrial and Marine Solvent II\*\*

A powerful, non-solvent based degreaser. Its advanced surfactant technology offers maximum efficiency in soil removal, especially applications where solvent use is required.

**Product Characteristics**

- Cleaning dust, dirt, carbon black, petroleum-based oils
- Phosphate-free, no EDTA or toxic solvents
- No irritating fumes
- Compatible with pressure washers and steam cleaners
- 803 pH >12 diluted

Available Container Sizes: 3.8 l (1 gal), 20 l, 208 l, 1000 l

\*\*Should not be used on aluminum or metals sensitive to high alkalinity.

**Applications**

- Covers all industries**
- Cleaning production equipment, facilities, floors, walls and steel structures



- Cost-effective—highly concentrated—dilute with water to use
- Strong, fast-acting
- Biodegradable

# KPC 820/820N

## Moderate pH, Industrial, Water-Based Degreaser

Balance powerful performance with environmental compliance and worker safety. The ideal choice for process degreasing.

**Product Characteristics**

- Highly dilutable
- Safe on most metals
- No irritating fumes
- Compatible with pressure washer and steam cleaners
- 820 pH <10 diluted
- NSF registered A1

Available Container Sizes:

820: 20 l, 208 l, 1000 l

820N: 20 l, 208 l, 1000 l

**Applications**

- Machine shop/maintenance
- Marine
- Pulp & paper
- Railroad equipment
- Chemical/oil processing
- Drilling rigs



- Safe for workers
- Biodegradable

AUTOMATIC LUBRICANT DISPENSERS

# Lubri-Cup™ EM Series

**Electro-Mechanical Automatic Grease Dispensers;  
Dispenses Grease Accurately at Timed Intervals**

Automatic single-point lubricator dispenses Chesterton grease to critical areas, eliminating over- and under-greasing. Lithium ion battery recommended for cold temperatures. -15°C – 60°C (5°F – 140°F)

**Product Characteristics**

- Microprocessor-controlled, “pulse” delivery system
- Programmable—operates up to 12 months
- Lubricates up to 8 bearings (except EM-X)—up to 6 m (20 ft) away

**Applications**

- All Industries Including:**
- Pulp and paper mills
  - Metal fabrication
  - Marine
  - Mining operations
  - Steel mills

**Versions Available**

• Lubri-Cup EM 250cc and 500cc	Battery operated
• Lubri-Cup EM-SP 250cc	Machine synchronized and externally powered (AC or DC power)
• Lubri-Cup EM-S 250cc	Machine synchronized
• Lubri-Cup EM-X 250cc	Recommended for hazardous locations
• Lubri-Cup EM-VS 60/120/240cc	Equipped with vibration sensor to only operate when vibration is detected



- User-friendly
- Cost-effective
- Refillable
- Reliable lubrication system
- Explosion proof

**Lubri-Cup EM-X**

- UL: Class I, Div II, Group C, D IP: IP54

# Lubri-Cup™ OL 500 Oiler

**“Pulse” Delivery; Automatic Lubrication System for Oils**

Automatic lubricator dispenses Chesterton oils to chains and other critical areas.

**Product Characteristics**

- Microprocessor-controlled, “pulse” delivery system
- Programmable—operates up to 12 months
- Lubricates up to 4 points
- Sealed microprocessor

**Applications**

- All Industries Including:**
- Pulp and paper mills
  - Mining operations
  - Food, pharmaceutical, beverage industries
  - General industry
  - Saw mills
  - Steel mills

**Versions Available**

• Lubri-Cup 500cc oiler	Battery operated
• Lubri-Cup 500cc oiler	Machine synchronized and externally powered (DC power)
• Lubri-Cup 500cc oiler	Machine synchronized and externally powered (AC power)



- Cost-effective
- Environmentally friendly, refillable container
- User-friendly with a large LCD

\*Vibration sensing unit  
\*\*Lithium ion battery recommended for cold temperatures.



AUTOMATIC LUBRICANT DISPENSERS

# Lubri-Cup™ VG

## Variable Gas, Single-Point Automatic Lubricators

An automatic, single-point 250cc lubricator which dispenses Chesterton grease to critical areas, eliminating over- and under-greasing. VG pro-logic microprocessor chip control—simple programming.

**Product Characteristics**

- A compact, convenient, and sturdy design that is simple to install and operate
- Preset dispensing rates—1, 3, 6, 9, or 12 months
- Remote operation—up to 1 m (3 ft)
- Electrochemical operation (Nitrogen gas)

**Applications**

- All Industries Including:**
- Mining and ore processing
  - Power
  - Pulp and paper
  - Water and wastewater
  - Steel and metal processing

**Versions Available**

- |                                 |                               |
|---------------------------------|-------------------------------|
| • Lubri-Cup VG 250cc 615 #1     | • Lubri-Cup VG 250cc 630 SXCF |
| • Lubri-Cup VG 250cc 615 #2     | • Lubri-Cup VG 250cc 633 SXCM |
| • Lubri-Cup VG 250cc 615 #2 460 | • Lubri-Cup VG 250cc 635 SXC  |



- Cost-effective
- Transparent container for lubricant inspection
- Reliable lubrication system
- UL: Class I, Div I, Group A, B, C, D
- ATEX: Ex ia IIC T4 Ga
- IP: IP 68

# Lubri-Cup™ VG Mini

## Variable Gas, Single Point Automatic Lubricators

Automatic, single-point lubricator dispenses Chesterton grease to critical areas, eliminating over- and under-greasing.

**Product Characteristics**

- A compact, convenient, and sturdy design that is simple to install and operate
- Preset dispensing rates—1, 3, 6, 9, 12 months
- Remote operation—up to 1 m (3 ft)
- Electrochemical operation (Nitrogen gas)
- Sealed microprocessor

**Applications**

- All Industries Including:**
- Mining and ore processing
  - Power
  - Pulp and paper
  - Water and wastewater
  - Steel and metal processing

**Versions Available**

- |                                    |  |
|------------------------------------|--|
| • Lubri-Cup VG Mini 120cc 630 SXCF | • Lubri-Cup VG Mini 120cc 615 #2                 |
| • Lubri-Cup VG Mini 120cc 635 SXC  | • Contact Chesterton for other greases available |



- Cost-effective
- Transparent container for lubricant inspection
- Reliable lubrication system
- Ability to turn on and off
- UL: Class I, Div I, Group A, B, C, D. Class II, Div I, Group E, F, G
- ATEX: Ex ia IIC T4 Ga
- IP: IP 68

## Lubri-Cup™ Products—Feature Summary

Select the Lubri-Cup dispenser that best fulfills your application needs. Chesterton Application Engineers are always available to assist you.

Product	Model	Lubricant Volume	Dimensions	Available Dispensing Period	Max. Lube Points	Remote Installation	Operating Pressure	Operating Temperature Range	Certifications and Approvals
	<b>Lubri-Cup VG Mini</b>	120CC	77 mm (Ø3.03") x 111 mm (4.37")	1, 3, 6, 9, 12 months	Single point only	Up to 1 m (3 ft)	Max 5kgf/cm <sup>2</sup> (70 psi)	-20°C – 55°C (-4°F – 131°F)	UL: Class I, Div I, Group A, B, C, D. Class II, Div I, Group E, F, G ATEX: Ex ia IIC T4 Ga IP: IP 68
	<b>Lubri-Cup VG</b>	250CC	97 mm (Ø3.82") x 163 mm (6.42")	1, 3, 6, 12 months	Single point only	Up to 1 m (3 ft)	Max 5kgf/cm <sup>2</sup> (70 psi)	-20°C – 55°C (-4°F – 131°F)	UL: Class I, Div I, Group A, B, C, D ATEX: Ex ia IIC T4 Ga IP: IP 68
	<b>Lubri-Cup EM</b>	250CC	91 mm (Ø3.58") x 210 mm (8.27")	Half (H) 1 – 12 months	Up to 8 points	Up to 6 m (20 ft) per point, 10 m (33 ft) single point	Max 60kgf/cm <sup>2</sup> (850 psi)	-15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack	—
		500CC	92 mm (Ø3.62") x 260 mm (10.24")	Half (H) 1, 2, 3, 6, 12, 18, 24 months	Up to 8 points	Up to 6 m (20 ft) per point, 10 m (33 ft) single point	Max 60kgf/cm <sup>2</sup> (850 psi)	-15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack	—
	<b>Lubri-Cup EM-S and EM-SP</b>	125CC, 250CC	91 mm (Ø3.58") x 210 mm (8.27")	Half (H) 1, 2, 3, 6, 12 months	Up to 8 points	Up to 6 m (20 ft) per point, 10 m (33 ft) single point	Max 60kgf/cm <sup>2</sup> (850 psi)	-15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack	—
	<b>Lubri-Cup EM-VS</b>	60CC, 120CC, 240CC	91 mm (Ø 3.60") x 181 mm (7.13")	1 – 12 months	Up to 8 points	Up to 10 m (33 ft)	Max 60kgf/cm <sup>2</sup> (850 psi)	-15°C – 60°C (5°F – 140°F); with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack	—
	<b>Lubri-Cup EM-X</b>	250CC	91 mm (Ø 3.58") x 210 mm (8.27")	Half (H) 1 – 12 months	Single point only	Up to 3 m (10 ft)	Max 15kgf/cm <sup>2</sup> (200 psi)	-15°C – 60°C (5°F – 140°F)	UL: Class I, Div II, Group C, D IP: IP54
	<b>Lubri-Cup OL 500 Oiler</b>	500CC	94 mm (Ø 3.7") x 229 mm (9")	Half (H) 1, 2, 3, 6, 12, 18, 24 months	Up to 4 points	Up to 12 m (40 ft) per point	Avg. 10kgf/cm <sup>2</sup> (142 psi)	-15°C – 60°C (5°F – 140°F) with alkaline battery pack -40°C – 60°C (-40°F – 140°F) with lithium battery pack	—



# ARC Industrial Coatings Product Application Guide

These tables provide general guidelines for ARC product selection. Detailed product performance data can be found on product-specific data sheets and ARC chemical resistance guides.

## Metal Coating Solutions

Wet Service Temperature	Specialty Coatings		Erosion Resistant			Corrosion, Erosion, and Chemical Attack						Abrasion Resistant				
	Patching/Repair/Rebuild	Machinable	Erosion/Corrosion Aqueous Solution	Erosion/Corrosion Mild Chemical	Erosion/Corrosion Elevated Temperature	Corrosion/Moderate Chemical	Corrosion/Harsh Chemical (Acid) Inorganic	Corrosion/Harsh Chemical (Acid) Organic and Bleaching Chemicals	Corrosion/Harsh Chemical (Alkalines)	Corrosion Flue Gasses	Potable Water Low Flow*	Potable Water High Flow*	Mild Sliding Abrasion	Moderate Sliding Abrasion	Severe Sliding Abrasion	Impact Abrasion
<50°C (<120°F)																
50 – 70°C (120 – 160°F)																
70 – 90°C (160 – 195°F)																
90 – 110°C (195 – 230°F)																
110 – 130°C (230 – 265°F)																
130 – 150°C (265 – 302°F)																
150 – 180°C (302 – 360°F)																
858	✓+	✓	✓+	✓+	✓+								✓			
HT-S			✓+	✓	✓+								✓			
S1PW/S1HB			✓	✓		✓+	✓				✓+		✓			
S2			✓+	✓+	✓	✓+	✓				✓	✓+	✓			
SD4i			✓+	✓+	✓	✓+	✓		✓	✓						
S4+						✓+	✓+		✓	✓						
S5						✓+	✓			✓+						
BX1													✓	✓+	✓	✓
I BX1/ I BX1 RC													✓	✓+	✓	✓+
BX2													✓+	✓	✓	✓
BX5													✓+	✓	✓	✓
MX1/MX2													✓	✓	✓+	✓+
MX FG													✓	✓	✓+	✓+

\*SIPW has NSF61 certification.

## Concrete Coating Solutions

	Pitching Grout	Grading Grout	Chemical Process Spill Areas	Machine/Mechanical Room Floors	Clean Room Floors	Plating Rooms	Traffic Aisles	Food Processing/Packaging	Interior Chemical Containment	Exterior Chemical Containment	Floor Drains	Battery Charger Rooms	Locker/Shower Rooms	Broadcastable, Non-Slip Surfaces	Bottling Lines	Pump Bases	Fabrication/Manufacturing Floors	Manholes/Septic Systems
797	✓+	✓+												✓+				
EG-1	✓+	✓+		✓			✓+									✓+	✓+	
791**	✓+	✓+	✓+	✓		✓+	✓	✓	✓+	✓+	✓+	✓+			✓+	✓+	✓+	✓+
988**			✓+	✓+		✓+	✓	✓	✓+	✓+	✓+	✓+				✓+	✓+	
CS2***			✓+	✓+	✓	✓+	✓	✓	✓+	✓	✓+	✓+	✓	✓	✓	✓+	✓	✓
CS4***			✓+	✓+	✓+	✓+		✓+	✓+	✓+	✓+	✓+	✓+	✓+	✓+	✓+	✓+	

\*\*Are resurfacing coatings for mechanical and chemical exposures

\*\*\*Are thin film coatings for chemical protection

✓+ = Best Choice
✓ = Good Choice
Moderate Chemical
Severe Chemical



EROSION RESISTANT COATINGS FOR METALS

# ARC 858

## Abrasion Control Compound

An advanced, trowelable, ceramic composite for the repair and protection of all metal surfaces subjected to erosion, corrosion, and chemical attack.

### Product Characteristics

- Applied by trowel or spatula
- Normally applied at a thickness of 1.5 mm (60 mils) or more
- Meets Milspec 24276 B "Hull smoothing and faring compound"

### Applications

- Pump casings and impellers
- Fans and housings
- Pipe elbows
- Screws
- Pitted tanks and pipes
- Heat exchangers
- Valves



- Rebuilds damaged equipment
- Repairs and smooths pitted surfaces
- Able to be top coated with other ARC Composites

### Technical Data

Dry Temperature (Max)	160°C (320°F)
Wet Temperature (Max)	70°C (160°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	478.5 – 47 (6810)
Available Sizes	0.25 kg, 940 ml (cartridge), 0.75 l, 1.5 l, 5 l, 16 l

# ARC HT-S

## Spark-Testable, High-Temperature, Sprayable, Erosion- Control Liquid

Advanced ceramic composites that are formulated to protect equipment from corrosion and erosion in elevated temperature immersion of aqueous solutions.

### Product Characteristics

- Easily applied by spray, brush, or roller
- Minimum thickness of 250 µm (10 mils) per coat
- Available in gray and blue

### Applications

- Hydrocyclones
- Heat exchangers
- Pump volutes and impellers
- Condensate pumps
- Tanks
- Valves
- Offshore equipment



- Extends equipment life
- Spark testable for pinhole-free verification
- Reduces downtime
- Cures in service

### Technical Data

Dry Temperature (Max)	175°C (347°F)
Wet Temperature (Max)	150°C (302°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	365 – 35.9 (5200)
Available Sizes	5 l, 16 l



COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL

# ARC S5

## Corrosion Protection in High-Temperature Immersion

Sprayable coating for extreme high-temperature immersion up to 180°C (356°F). Ideal for elevated temperature process vessels and equipment exposed to heated fluids where high temperature differentials may exist.

### Product Characteristics

- Performs in immersed aqueous solution conditions up to 180°C (356°F)
- Replaces exotic alloys, engineered plastics, ceramics, and conventional coatings
- Easily applied by roller, brush, squeegee, or airless spray

### Applications

- Transport oil pipelines
- Separators
- Deaerators
- Fans and housings
- Ducting
- Tanks and vessels
- Heat exchangers
- Pumps and valves



- Spark testable per NACE SP018
- Passes NACE TM0185 at 180°C (356°F)
- Permeation resistant

### Technical Data

Dry Temperature (Max)	210°C (410°F)
Wet Temperature (Max)	180°C (356°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	365.4 – 35.9 (3500)
Available Sizes	5 l, 16 l

# ARC S4+

## 100% Solids, Mineral-Reinforced, Epoxy Novolac, Acid-Resistant Coating

An advanced, liquid, polymer coating formulated to protect equipment from extreme chemical attack and corrosion.

### Product Characteristics

- Two-coat system
- Easily applied by spray, brush, or roller
- Minimum thickness of 375 µm (15 mils) per coat

### Applications

- Chemical storage tanks
- Chimneys and stacks
- Exhaust gas ductwork
- Fans and housings
- Heat exchangers
- Tank linings
- Structural steel



- Provides long-term protection
- Low permeability for immersion conditions
- Sprayable viscosity for rapid installation
- Spark testable for pinhole-free verification

### Technical Data

Dry Temperature (Max)	150°C (300°F)
Wet Temperature (Max)	60°C (140°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	330 – 32.4 (4700)
Available Sizes	1125 ml (cartridge), 5 l, 16 l



COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL

# ARC S2

## Ceramic-Reinforced, Sprayable, Erosion-Resistant Coating

An advanced, liquid, ceramic-reinforced coating for the protection of all metal surfaces subject to erosive, corrosive, and severe fluid flow conditions.

### Product Characteristics

- Two-coat system
- Applied via conventional airless spray systems, brush, or roller
- Wet film thickness of 0.25 – 0.5 mm (10 – 20 mils) per coat

### Applications

- Flue gas ducts
- Heat exchangers
- Quench zones
- Flue gas particulate filters
- Chemical reactors
- Chemical storage and process tanks

### Technical Data

Dry Temperature (Max)	80°C (175°F)
Wet Temperature (Max)	52°C (125°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	463 – 45.5 (6590)
Salt Fog	>20000 hrs
Available Sizes	1125 ml (cartridge), 1.5 l, 5 l, 16 l



- Improves fluid flow efficiency
- Extends equipment life
- Sprayable viscosity for rapid installation
- Spark testable for pinhole-free verification

## Product Case Study

### Challenge

#### Issue

Failing coal tar epoxy coated wastewater tanks require maintenance and relining every 18 months. Pitting corrosion requires patch weld repair.

#### Goal

- Extend maintenance painting to >60 months
- Reduce pitting corrosion and patch weld repairs

#### Root Cause

Acidic wastewater attacks coating and leads to pitting corrosion of steel.

### Solution

#### Preparation

- Decontaminate surfaces
- Grit blast to Sa 2.5 and 3 mil (75 µm) angular profile

#### Application

Spray apply two coats of **ARC S2** in alternating colors @ 25 – 30 mils (650 – 750 µm) total thickness

### Results

#### Client Report

- In total 4 tanks were lined
- Inspection after 8 years showed no damage
- Tanks were relined at 15 years

#### Estimated Savings

Customer estimates \$75000 per year based on lifetime: 10+ yrs. vs. previous 1.5 yrs

\$=USD



One of four tanks to be lined



Failed coal tar epoxy coating



ARC S2 spray applied with airless system



COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL

# ARC S1PW

## General Purpose, Sprayable, Corrosion Protection Coating

An advanced, ceramic-reinforced liquid composite formulated to protect metal surfaces from erosion, corrosion, and mild chemical attack.

### Product Characteristics

- Two-coat system
- Easily applied by spray, brush, or roller
- Minimum thickness of 250 µm (10 mils) per coat
- Approved to NSF Std 61 for drinking water

### Applications

- Structural steel
- Cooling water systems
- Pipeline coatings
- Service water systems
- Wastewater structures
- Tanks



- Low permeability provides long-term protection
- Spark testable for pinhole-free verification
- Sprayable viscosity for rapid installation

### Technical Data

Dry Temperature (Max)	62°C (144°F)
Wet Temperature (Max)	52°C (126°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	477 – 46.8 (6790)
Salt Fog	>10000 hrs
Available Sizes	1125 ml (cartridge), 5 l, and 16 l

# ARC S1HB

## High Build, Single Coat, Edge-Retentive Barrier Coating

ARC S1HB is a mineral reinforced, amidoamine cured modified epoxy lining for the protection of metallic and cementitious surfaces from corrosive exposures. Its high build, edge-retentive nature provides maximum coverage over hard 90° edges and corners with minimal thinning at the sharp edge.

### Product Characteristics

- Provides excellent barrier protection against corrosion and chemical attack
- Provides resistance to erosive flow
- High build (1 – 2 mm/ 40 – 80 mils) coating designed for rough surfaces
- Easily applied by heated plural component spray with brush application for touch-up
- UV sensitive pigment for QC inspection

### Applications

- Crude oil storage tanks
- Chemical storage tanks
- Thickener tanks
- Pipelines/penstocks
- Wastewater clarifiers
- Grit chambers
- Wet wells/junction boxes
- Manholes
- Acceptable for use with cathodic protection systems



- Greater than 70% edge retention
- 100% solids
- Low VOCs

### Technical Data

Dry Temperature (Max)	80°C (175°F)
Wet Temperature (Max)	52°C (125°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	Metal: 309 – >30 (4400) Concrete: 28 – >2.7 (400)
Salt Fog	>10000 hrs
Available Sizes	1125 ml (cartridge), 60 l, 600 l kits

COATINGS FOR CORROSION, EROSION, AND CHEMICAL ATTACK FOR METAL

# ARC SD4i

## High-Temperature Ceramic-Reinforced Erosion Resistant Coating

100% solids, advanced reinforced thin film coating to protect structures and equipment in extreme immersion services.

Product Characteristics	Applications
<ul style="list-style-type: none"> <li>Erosion-resistant surface</li> <li>100% solids, no VOCs</li> <li>Low viscosity, thin film</li> <li>Brush, roller and spray applied</li> </ul>	<ul style="list-style-type: none"> <li>Flotation cells</li> <li>Heat exchangers</li> <li>Hoppers</li> <li>Hydrocyclones</li> <li>Bins and silos</li> <li>Deaerators</li> <li>Thickener tanks</li> <li>Slurry tanks</li> <li>Slurry pipes</li> </ul>

Technical Data	
Dry Temperature (Max)	120°C (248°F)
Wet Temperature (Max)	65°C (149°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	241 – 23.7 (3430)
Taber Abrasion (ASTM D4060) H-18/1000 cycles/1 kg load	26 mg loss
Available Sizes	0.75 l, 1125 ml (cartridge), 1.5 l, 5 l, and 16 l

### Product Case Study

#### Challenge

##### Issue

A 316 SS, well flow hydrocyclone severely pits and corrodes. Normal life of units is 4 – 5 years.

##### Goal

- Improve the efficiency of separation by preventing corrosion and metal loss/damage.
- Avoid equipment replacement with a super duplex stainless steel unit at a cost of >\$65K

##### Root Cause

High chloride and solids concentration of solids and hydrocyclone turbulence.

#### Solution

##### Preparation

- Grit blast to Sa 2.5 with 3 mil (75 µm) angular profile
- Treat to remove residual chlorides

##### Application

- Apply **ARC 858** to areas of severe corrosion pitting and rebuild smooth surface
- Apply 2 coats of **ARC SD4i** with DFT of 750 to 30 – 40 mils (1000 µm) per coat for abrasion and corrosion protection and enhanced flow

#### Results

##### Client Report

Unit is operational for 4+ years since ARC solution. Inspection at 3-year point showed no signs of coating failure or pitting.

##### Estimated Savings

Replacement	\$65,000
<b>ARC material</b>	<b>-\$ 3,200</b>
Labor to install	-\$13,000
<b>Total Savings</b>	<b>\$48,800</b>

Payback vs. Replacement = <3 months



- Protect against corrosion and erosion
- Provide extended protection in aggressive chemical immersion services
- Apply by brush, roller, airless, or plural component spraying



Hydrocyclone after cleaning and decontaminating.



After surface preparation **ARC 858** is applied to pitted and corroded areas.



After **ARC 858** has rebuilt corroded areas two coats of **ARC SD4i** is applied.

ABRASION RESISTANT COMPOSITES FOR METAL

# ARC BX5

## Rapid-Curing, Trowel-Grade Coating for Fine-Particle Moderate Sliding Wear

Rapid curing, 100% solids, ceramic-reinforced, multi-component system, formulated for moderate sliding-wear and abrasion caused by fine particles.

**Product Characteristics**

- Cure under adverse conditions with maximum adhesion
- Quickly patch and repair worn equipment and structures
- Easily apply by trowel

**Applications**

- Pneumatic conveyors
- Chipper and chip bins
- Turbo separators
- Ni-hard slurry pumps
- Fly ash separators
- Screw conveyors
- Cyclones and hoppers
- Transport fans
- Hydro pulpers
- Wear plates
- Pipe elbows
- Pulverizers

**Technical Data**

Dry Temperature (Max)	120°C (248°F)
Wet Temperature (Max)	60°C (140°F)
Tensile Adhesion (ASTM D638) - kg/cm <sup>2</sup> - MPa (psi)	224 – 22.1 (3200)
Available Sizes	0.75 l, 2.5 l
Colors	Red and gray

### Product Case Study

**Challenge**

**Issue**

Loss of ceramic tile results in abrasion and corrosion damage to structural steel requiring weld patching every 12 – 14 days. Maintenance shutdowns (12 hrs) allow for partial patching.

**Goal**

- Find reliable solution to extend operating interval to >6 months
- Solution must allow fast return to service

**Root Cause**

Failure of brittle ceramic tiles due to impact of coal particles as large as 4" (10 cm) diameter.

**Solution**

**Preparation**

- Exposed metal was patch welded
- Grit blast to Sa 2.5 with 3 mil (75 µm) angular profile

**Application**

1. Apply **ARC MX5** @ 120 – 200 mil (3 – 5 mm) to steel and butting up to ceramic tile
2. Total repair was completed in <12 hours

**Results**

**Client Report**

- Life of ceramic tile: 4 – 6 months
- Life of patch weld repair: <4 weeks
- **Life of ARC MX5 repair: >7 months**

**Estimated Savings**

Due to the success of this application the client adopted ARC Coatings as the emergency "patch repair" for all tile lined chutes and lines



- Surface tolerant
- Greater 60% ceramic reinforcement
- High adhesion



Failure of tile-lined chute after four months prior to patch weld.



Application of ARC MX5



ARC MX5 after 7 months





ABRASION RESISTANT COMPOSITES FOR METAL

# ARC I BX1

## Impact- and Wear-Resistant Epoxy Composite


*I BX1 is a urethane modified amine cured epoxy coating highly reinforced with ceramic beads and flakes for resistance to severe sliding abrasion where impact forces or rapid vibration is a concern.*

### Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at minimum thickness of 6 mm (1/4") or more

### Applications

- Hoppers and chutes
- Slurry pumps
- Pipes and pipe elbows
- Pneumatic conveyors
- Pulverizers and impact zones

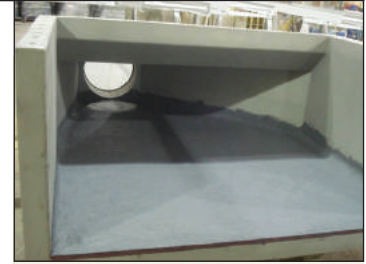

- High impact resistance
- Reduces the need for spare parts
- Simplifies maintenance procedures
- Extends equipment life
- Improves safety by reducing hotwork

### Technical Data

Dry Temperature (Max)	205°C (400°F)
Wet Temperature (Max)	95°C (205°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	222.7 – 21.9 (3170)
Available Sizes	20 kg, 12 x 20 kg

# ARC I BX1 RC

## Rapid-Curing, Trowel-Grade Coating for Coarse Particle Severe Sliding Wear with Impact

*A rapid-curing high impact-resistant, 100% solids, epoxy/urethane hybrid with ceramic reinforcements for severe wear regions and impact.*

### Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at minimum thickness of 6 mm (1/4") or more
- Cures to functional state in less than 4 hours

### Applications

- Rubber pump liners
- Slurry pump cutwaters
- Rubber-lined agitators
- FD/ID fan housings
- Vibrating screen decks
- Discharge plates
- Pipe elbows
- Tile-lined chutes
- Pulverized fuel lines



- Bonds to metal, concrete, ceramic, and many plastics
- High impact resistance
- Simplifies maintenance procedures

### Technical Data

Dry Temperature (Max)	205°C (400°F)
Wet Temperature (Max)	95°C (203°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	238.2 – 23.4 (3390)
Available Sizes	1.5 l, 2.5 l





ABRASION RESISTANT COMPOSITES FOR METAL

# ARC BX1

## Coarse Grade, Sliding Wear Compound

Advanced, ceramic-reinforced composites for the repair and protection of all metal surfaces subjected to severe abrasion and erosion/corrosion.

### Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at a minimum thickness of 6 mm (1/4") or more
- Approved to NSF Std 61 for drinking water

### Applications

- Separators and cyclones
- Hoppers/chutes
- Coal pulverizers
- Hydro pulpers
- Wear plates
- Slurry pumps
- Pipe elbows
- Pulverized fuel lines
- Screws



- Reduces the need for spare parts
- Simplifies maintenance procedures
- Extends equipment life
- Improves safety by reducing hotwork

### Technical Data

Dry Temperature (Max)	205°C (400°F)
Wet Temperature (Max)	95°C (205°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	238 – 23.5 (3400)
Available Sizes	1.5 l, 20 kg, 12 x 20 kg

# ARC BX2

## Fine Grade, Sliding Wear Compound

Advanced, ceramic-reinforced composites for the repair and protection of all metal surfaces subjected to severe abrasion and erosion/corrosion.

### Product Characteristics

- High volumetric ceramic particle loading
- Applied by trowel or plastic applicator tool
- Applied at a minimum thickness of 3 mm (1/8") or more

### Applications

- Separators and cyclones
- Hoppers/chutes
- Coal pulverizers
- Hydro pulpers
- Wear plates
- Slurry pumps
- Pipe elbows
- Pulverized fuel lines
- Screws



- Reduces the need for spare parts
- Simplifies maintenance procedures
- Extends equipment life
- Improves safety by reducing hotwork

### Technical Data

Dry Temperature (Max)	205°C (400°F)
Wet Temperature (Max)	95°C (205°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	238 – 23.4 (3390)
Available Sizes	1.5 l, 5 l, 20 kg, 12 x 20 kg
Colors	Red and gray



ABRASION RESISTANT COMPOSITES FOR METAL

# ARC MX1

## Trowel-Grade Coating for Coarse Particle Extreme Sliding Wear and Impact

100% solids, ceramic-reinforced, multi-component system, formulated for extreme impact, sliding-wear abrasion, and impact caused by medium-to-coarse particle flow.

### Product Characteristics

- >90% by weight ceramic reinforcement
- 100% solids; no VOCs; no free isocyanates
- Novel toughened polymer matrix for improved impact resistance

### Applications

- Pulverizers
- Dredge pumps
- Hoppers and silos
- Conveyor screws
- Pumps and pipe elbows
- Fans/blowers/cyclones
- Slurry pipelines and pumps
- Ceramic tile deflector hoods
- Fan housings
- Ceramic tile-lined chutes
- Rubber-lined deflector hoods



- Protect surfaces against dry coarse particle erosion, wet slurry abrasion, and impact
- Provide a longer lasting alternative to rubber linings and ceramic wear tiles
- Restore worn equipment to near original condition
- Replace hard alloy blends as wear resistant material
- Easily apply by trowel

### Technical Data

Dry Temperature (Max)	205°C (400°F)
Wet Temperature (Max)	95°C (203°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	224.8 – 22.1 (4200)
Available Sizes	6 kg, 20 kg

# ARC MX2

## Trowel-Grade Coating for Fine Particle Severe Sliding Wear

100% solids, ceramic-reinforced, multi-component system, formulated for extreme sliding wear and abrasion caused by fine particles.

### Product Characteristics

- Easily apply by trowel
- Applied up to 6 mm (1/4") without sag
- Bright white
- No primer required

### Applications

- Cyclones
- Valves
- Hopper bins
- Pulp dewatering screws
- Wear plates
- Slurry pumps
- Agitators
- Mixers
- Cleaner cones
- Pipe spools
- Pulverizers



- 92% pure alumina ceramic reinforcement yields maximum hardness and abrasion resistance
- Preferred for slurries or particle flow with particulates less than 3 m (1/8") in size

### Technical Data

Dry Temperature (Max)	205°C (400°F)
Wet Temperature (Max)	95°C (203°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	238.9 – 23.5 (3400)
Available Sizes	2.5 l, 16 l




ABRASION RESISTANT COMPOSITES FOR METAL

# ARC MX FG

## Abrasion Resistant Coating for Fine Particle Wear

ARC MX FG is a trowel applied 100% solids, zero VOC, ceramic reinforced epoxy coating designed for protecting surfaces against dry and wet slurry abrasive flow. This two part system complies to 21 CFR 175.300 and is suited for direct food contact.

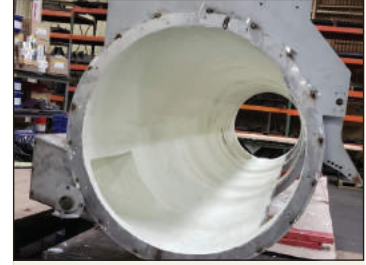

### Product Characteristics

- Protect metal surfaces from extreme sliding-wear and abrasion caused by fine particles
- Restore worn equipment to near original condition
- Provide a longer lasting alternative to rubber linings and ceramic wear tiles
- Extends life of equipment exposed to fine particle wear
- Resist a broad pH spectrum
- Applies easily by trowel

### Applications

- Cyclones
- Valves
- Hopper bins
- Transport screws
- Wear plates
- Slurry pumps
- Agitators
- Mixers
- Cleaner cones
- Pipe spools
- Pipe elbows
- Pulverizers

### Technical Data

Dry Temperature (Max)	205°C (400°F)
Wet Temperature (Max)	95°C (203°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	224.8 – 22.1 (4200)
Available Sizes	1.5 l, 5 l, and 16 l

- Tough, ceramic-reinforced coating that resists broad range of slurries
- Complies with 21 CFR 175.300 for direct food contact as follows:
  - Type II – Acidic (pH 5.0 or below), aqueous products; may contain salt or sugar or both, including oil-in-water emulsions of low or high fat content food.
  - Type III – Aqueous, acid or non-acid products containing free oil or fat; may contain salt, and including water-in-oil emulsions of low or high fat content.
  - Type IVA – Dairy products and modifications: Water in oil emulsion, high or low fat.
  - Type IVB – Dairy products and modifications: Oil in water emulsion, high or low fat.
  - Type V – Low moisture fats and oils, Condition C.
  - Type VIII – Dry solid foods.

RESURFACING COATINGS FOR CONCRETE

# ARC EG-1

## Fast-Setting Grout Resurfacer to Repair/Patch Concrete Surfaces

Use ARC EG-1 to resurface damaged concrete surfaces quickly, including voids up to 12 inches. ARC EG-1 bonds to damp or dry concrete, is fast-setting, and can be rapidly coated within 4 hours with other ARC coatings for improved chemical or mechanical protection.

ARC EG-1 is a 100% solids, three-part grout that uses a low viscosity, moisture-tolerant epoxy chemistry that is reinforced with a dried blend of graded and pigmented silica aggregates.



### Product Characteristics

- Resurface concrete damaged by a chemical attack or mechanical stress
- Fills voids prior to top coating
- Bonds to damp concrete
- Sets fast, allowing rapid overcoating
- Applies easily by trowel

### Applications

- Fill spalled areas
- Build up low areas
- Form curbs and pads
- Patch machinery footprint damage
- Create slopes to drains

### Technical Data

Wet Immersion (Continuous)	66°C (150°F)
Wet Immersion (Intermittent)	93°C (200°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	>35.1 – >3.4 (>500) concrete failure
Available Sizes	Patch Kit and System Kit

- No primer required
- Excellent for pitching and grading compound
- Accepts topcoat four hours after application



RESURFACING COATINGS FOR CONCRETE

# ARC 791

## 100% Solids, Novolac Resin Blend, Trowel-Applied, Quartz-Reinforced Concrete, High-Build Concrete Coating

A quartz-reinforced composite that is designed to resurface and restore concrete surfaces, to protect new concrete and to repair concrete damaged by chemical and physical abuse.



**Product Characteristics**

- Trowelable overlayment
- Applied at minimum thickness of 6 mm (1/4")
- Can be applied to damp and vertical surfaces
- Non-shrinking, no solvents, 100% solids

**Applications**

- Chemical containment
- Floor drains and sumps
- Process floor
- Equipment bedding
- Pump bases/grouting
- Structural support columns

- Low maintenance overlayment
- Provides long-term protection
- Avoids costly structural rebuild
- Non-sagging: easily applied to vertical surfaces

**Technical Data**

Dry Temperature (Max)	93°C (200°F)
Wet Temperature (Max)	66°C (150°F)
Compressive Strength (ASTM C579) - kg/cm <sup>2</sup> - MPa (psi)	655 – 64.2 (9320)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	>35,1 – >3,4 (>500) Concrete Failure
Available Sizes	System Kit, Bulk Kit

### Product Case Study

**Challenge**

**Issue**

- Repair screws and troughs of effluent pumps to return system to specified productivity
- Eliminate waste hang-ups and excessive energy draw

**Root Cause**

Acidic stock waste had corroded the concrete pump sleeves, causing loss of pump efficiency. Three pumps were required to handle waste stream.

**Solution**

**Preparation**

Concrete was grit blasted and rebuilt with rapid set acrylic modified concrete.

**Application**

1. Prime with **ARC 797** to promote adhesion
2. Apply **ARC 791** and finish
3. Note: Screws were reinstalled 18 hours after application of coatings

**Results**

**Client Reported One Year After Repair**

- Effluent movement improved
- Plant reduced operation to 1 pump
- Plant reports 66% electricity savings



Three effluent pumps in operation prior to repair



ARC 791 applied to properly prepared surfaces



All three pump troughs coated with ARC 791





RESURFACING COATINGS FOR CONCRETE

# ARC 988

**Highly Chemically Resistant, 100% Solids, Pure Novolac Resin-Based, Trowel Applied, Quartz-Reinforced Concrete, High-Build Concrete Coating**

*A high performance, quartz-reinforced composite that is designed to resurface and restore concrete surfaces, to protect new concrete, and to repair concrete damaged by severe chemical and physical abuse.*

**Product Characteristics**

- Trowelable overlayment
- Applied at minimum thickness of 6 mm (1/4")
- Can be applied to damp concrete
- Non-shrinking, no solvents, 100% solids
- Colors: Gray, Red

**Applications**

- Chemical containments
- Equipment bases
- Secondary containment areas
- Sumps, trenches, and neutralization tanks

**Technical Data**

Dry Temperature (Max)	93°C (200°F)
Wet Temperature (Max)	65°C (150°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	Greater than 35.1 – 3.4 (500) concrete failure
Compressive Strength (ASTM C579) - kg/cm <sup>2</sup> - MPa (psi)	1000 – 97.9 (14200)
Available Sizes	System Kit, Bulk Kit



- Low maintenance overlayment
- Provides long-term protection
- Avoids costly structural rebuild
- Reduces safety hazard caused by damaged concrete
- Easily applied to vertical surfaces/non-sagging

THIN FILM COMPOSITES FOR CONCRETE

# ARC 797

**Fast-Penetrating, Modified-Epoxy Primer/Sealer**

*797 is used as a primer for applications involving CS2 and CS4 as well as 791 and 988 which can also be used in a multi-coat application as a concrete sealer.*

**Product Characteristics**

- Low mixed viscosity
- 100% solids; no VOCs; no free isocyanates
- Can be applied to damp concrete
- Promotes strong adhesion to concrete

**Applications**

- As a primer:**
- Primarily for ARC 791 and 988
  - Secondarily for CS2 and CS4
- As a sealer:**
- Concrete tanks
  - Secondary containment
  - Water intakes and dams
  - Sumps, drains and pits
  - Process floor areas
  - Pump bases
  - Equipment bases

**Technical Data**

Dry Temperature (Max)	93°C (200°F)
Wet Temperature (Max)	66°C (150°F)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	35.1 – >3.4 (>500)
Available Sizes	16 l kit



- Bond to damp concrete
- Penetrate and seal concrete surface layer
- Provide a proper surface for application of other ARC epoxy-based coatings for concrete
- Apply by roller, brush, or airless spray



THIN FILM COMPOSITES FOR CONCRETE

# ARC CS2

## General Purpose, Thin Film, Novolac Blend, Epoxy Coating

Thin film, advanced composites that are formulated to protect concrete surfaces. CS2 is used for mild chemical attack and CS4 for harsh chemical attack.

### Product Characteristics

- Protect new and old concrete surfaces/ structures subject to mild chemical and/or physical damage
- Can be broadcast for slip resistant surface finish
- Apply by brush, roller, spray, or squeegee

### Applications

- Concrete tanks
- Water intakes and dams
- Secondary containment
- Process floor areas
- Chemical plant floors
- Drainage troughs
- Equipment bases
- Chemical tanks
- Floor drains
- Cooling towers
- Sumps

### Technical Data

Dry Temperature (Max)	80°C (175°F)
Wet Temperature (Max)	52°C (125°F)
Compressive Strength (ASTM C579) - kg/cm <sup>2</sup> - MPa (psi)	680 – 66.6 (9650)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	35 – 3.4 (500)
Available Sizes	16 l

## Product Case Study

### Challenge

#### Issue

Coating destroyed in secondary containment bund after spills of aluminum sulfate.

#### Goal

Protect concrete and other structures from chemical attack; avoid cost of lost product and potential fines.

#### Root Cause

Reinforcement content of previous coating allowed wicking of aggressive chemicals. Substrate attack caused failure.

### Solution

#### Preparation

- HP water blast 600 bar (8500 psi)
- Decontaminate with IMS II

#### Application

1. Apply **ARC 797** to prime
2. Apply **ARC 988** to pitch to grade
3. Apply **ARC CS4** to seal floor
4. Apply **ARC CS2** to protect walls

### Results

#### Client Reported

- > 3 years without damage to the coating
- Avoided possible fines
- Avoided annual reconstruction costs;
- Avoided first year recoat costs: \$8.5K
- **3 year savings for recoating: \$25.5K**



Failed coating of secondary containment area after spills.



Cleaned and prepared surface of secondary containment.



Applying **ARC CS4** topcoat to secondary containment.



- Provides long-term protection
- Avoids costly structural rebuild
- Reduces safety hazard caused by damaged concrete



THIN FILM COMPOSITES FOR CONCRETE

# ARC CS4

## Highly Chemically Resistant, 100% Novolac Resin, Epoxy Coating

Thin film, advanced composites that are formulated to protect concrete surfaces. CS2 is used for mild chemical attack and CS4 for harsh chemical attack.



**Product Characteristics**

- Protect new and old concrete surfaces/ structures subject to harsh chemical and/ or physical damage
- Can be broadcast into for slip resistant surface finish
- Apply by brush, roller, spray, or squeegee

**Applications**

- Concrete tanks
- Equipment bases
- Process floor areas
- Chemical plant floors
- Drainage troughs
- Secondary containment
- Water intakes and dams
- Chemical tanks
- Cooling towers
- Floor drains
- Sumps

- Provides long-term protection
- Avoids costly structural rebuild
- Reduces safety hazard caused by damaged concrete

**Technical Data**

Dry Temperature (Max)	80°C (175°F)
Wet Temperature (Max)	40°C (105°F)
Compressive Strength (ASTM C579) - kg/cm <sup>2</sup> - MPa (psi)	970 – 95.1 (13750)
Tensile Adhesion (ASTM D4541) - kg/cm <sup>2</sup> - MPa (psi)	>35.1 – 3.4 (500)
Available Sizes	5 l, 16 l

### Product Case Study

**Challenge**

**Issue**

Severe corrosion to failing acid brick-lined concrete basin resulted in leaks and environmental fines

**Goal**

Avoid future fines and return basin to chemical-resistant status

**Root Cause**

Sulfuric and hydrochloric acids degrading mortar and grout lines

**Solution**

**Preparation**

- Old acid brick was removed as well as damaged concrete
- Surfaces abrasive grit blasted and alkaline washed

**Application**

1. Cementitious mortar used to resurface damaged concrete
2. All surfaces coated with two coats of **ARC CS4** at 15 – 20 mil (375 – 500 µm)/coat

**Results**

**Client Reported**

- Repairs carried out a over two-week period
- Basin operated for 6+ years before repairs were required

Acid brick estimate	\$ 150,000
ARC lining	\$ 47,000
Savings	\$ 103,000



Basin in petrochemical complex



Surface preparation



ARC CS4 final application

## ARC INDUSTRIAL COATINGS ORDERING INFORMATION

## ARC Metal Coating Systems

## ARC 858

## Abrasion Control Compound (P; T; C)\*

0.75 l (1.2 kg); 750 µm (30 mils); 0.98 m <sup>2</sup> (10.6 ft <sup>2</sup> )	
Gray .....	085733
940 ml (1.53 kg); 750 µm (30 mils); 1.3 m <sup>2</sup> (13.5 ft <sup>2</sup> )	
Gray .....	0842921
250 g (QP); 750 µm (30 mils); 0.19 m <sup>2</sup> (2.15 ft <sup>2</sup> )	
Gray .....	086194
1.5 l (2.45 kg); 750 µm (30 mils); 2 m <sup>2</sup> (21.53 ft <sup>2</sup> )	
Gray .....	085357
5 l (8.15 kg); 750 µm (30 mils); 6.67 m <sup>2</sup> (71.76 ft <sup>2</sup> )	
Gray .....	085364
16 l (26.08 kg); 750 µm (30 mils); 21.33 m <sup>2</sup> (229.63 ft <sup>2</sup> )	
Gray .....	085404

## ARC HT-S

## Spark-Testable, High-Temperature, Sprayable, Erosion-Control Liquid (P; T; C)\*

5 l (8.31kg); 750 µm (30 mils); 6.62 m <sup>2</sup> (73.76 ft <sup>2</sup> )	
Blue .....	085373
Gray .....	085372
16 l (26.58 kg); 750 µm (30 mils); 21.33 m <sup>2</sup> (229.63 ft <sup>2</sup> )	
Blue .....	082736
Gray .....	082743

## ARC BX1

## Coarse Grade, Sliding Wear Compound (P; T; C)\*

1.5 l (3.66 kg); 6 mm; (240 mils); 0.25 m <sup>2</sup> (2.69 ft <sup>2</sup> )	
Gray .....	085593
5 l (12.19 kg); 6 mm; (240 mils); 0.83 m <sup>2</sup> (8.97 ft <sup>2</sup> )	
Gray .....	085596
12 x 20 kg; 6 mm (240 mils); 18 m <sup>2</sup> (180 ft <sup>2</sup> )	
Gray .....	082685
20 kg; 6 mm (240 mils); 1.5 m <sup>2</sup> (15 ft <sup>2</sup> )	
Gray .....	088931

## ARC BX2

## Fine Grade, Sliding Wear Compound (P; T; C)\*

1.5 l (3.55 kg); 3 mm; (120 mils); 0.50 m <sup>2</sup> (5.38 ft <sup>2</sup> )	
Gray .....	085435
5 l (11.83 kg); 3 mm; (120 mils); 1.67 m <sup>2</sup> (17.94 ft <sup>2</sup> )	
Gray .....	085438
12 x 20 kg; 3 mm (120 mils); 36 m <sup>2</sup> (387.6 ft <sup>2</sup> )	
Gray .....	082686
20 kg; 3 mm (120 mils); 3 m <sup>2</sup> (32.3 ft <sup>2</sup> )	
Gray .....	088927

## ARC I BX1

## Impact- and Wear-Resistant Epoxy Composite (P; T; C)\*

12 x 20 kg; 6 mm (240 mils); 18 m <sup>2</sup> (193.2 ft <sup>2</sup> )	
Gray .....	081946
20 kg; 6 mm (240 mils); 1.5 m <sup>2</sup> (16.1 ft <sup>2</sup> )	
Gray .....	081948

## ARC I BX1 RC

## Rapid-Curing, Trowel-Grade Coating for Coarse Particle Severe Sliding Wear with Impact (P; T; C)\*

1.5 l (3.54 kg); 6 mm (240 mils); 0.25 m <sup>2</sup> (2.7 ft <sup>2</sup> )	
Brown .....	085360
2.5 l (5.9 kg); 6 mm (240 mils); 0.42 m <sup>2</sup> (4.5 ft <sup>2</sup> )	
Brown .....	085379

## ARC S1 HB

## Edge Retentive High Build Coating (P; T; C)\*

1125 ml (1.57 kg); 375 µm (15 mils); 3 m <sup>2</sup> (32.3 ft <sup>2</sup> )	
Light Gray .....	085948
60 l (88 kg); 750 µm (30 mils); 80 m <sup>2</sup> (850 ft <sup>2</sup> )	
Light Gray .....	088664
600 l (880 kg); 750 µm (30 mils); 800 m <sup>2</sup> (8500 ft <sup>2</sup> )	
Light Gray .....	088665

## ARC S1PW

## General Purpose, Sprayable, Corrosion Protection Coating (P; T; C)\*

1125 ml (1.78 kg); 375 µm (15 mils); 3 m <sup>2</sup> (32.3 ft <sup>2</sup> )	
Blue .....	084784
White .....	084783
5 l (7.9 kg); 375 µm (15 mils); 13.33 m <sup>2</sup> (143.52 ft <sup>2</sup> )	
Blue .....	085375
White .....	085376
16 l (25.27 kg); 375 µm (15 mils); 42.67 m <sup>2</sup> (459.26 ft <sup>2</sup> )	
Blue .....	084094
White .....	084096

## ARC S2

## Ceramic-Reinforced, Sprayable, Erosion-Resistant Coating (P; T; C)\*

1125 ml (1.71 kg); 375 µm (15 mils); 3 m <sup>2</sup> (32.3 ft <sup>2</sup> )	
Gray .....	084496
Green .....	084495
1.5 l (2.28 kg); 375 µm (15 mils); 4 m <sup>2</sup> (43.06 ft <sup>2</sup> )	
Gray .....	085386
Green .....	085387
5 l (7.60 kg); 375 µm (15 mils); 13.33 m <sup>2</sup> (143.52 ft <sup>2</sup> )	
Gray .....	085377
Green .....	085378
16 l (24.33 kg); 375 µm (15 mils); 42.67 m <sup>2</sup> (459.26 ft <sup>2</sup> )	
Gray .....	085407
Green .....	085408

## ARC S5

## Corrosion Protection in High-Temperature Immersion (P; T; C)\*

5 l (8.74 kg); 375 µm (15 mils); 13.33 m <sup>2</sup> (143.5 ft <sup>2</sup> )	
Light Gray .....	085811
Med. Gray .....	085812
16 l (27.98 kg); 375 µm (15 mils); 42.7 m <sup>2</sup> (459.3 ft <sup>2</sup> )	
Light Gray .....	085806
Med. Gray .....	085807

Technical data notes: 1) Coverage values are theoretical, based on no waste factor or surface profile effects. In practice, 10–20% extra product should be added for waste factor assuming brush, roller, or trowel application. 2) Waste factor for products applied by spray could vary significantly depending on spray equipment, substrate geometry, and environmental conditions. 3) All coverage values based on product temperature of 21°C (70°F).

## ARC INDUSTRIAL COATINGS ORDERING INFORMATION

### ARC Metal Coating Systems

**ARC S4+**  
100% Solids, Mineral-Reinforced, Epoxy Novolac, Acid-Resistant Coating (P; T; C)\*

1125 ml (1.41 kg); 375 µm (15 mils); 3 m <sup>2</sup> (32.3 ft <sup>2</sup> )	
Gray .....	084497
Red .....	084498
5 l (6.30 kg); 375 µm (15 mils); 13.33 m <sup>2</sup> (143.52 ft <sup>2</sup> )	
Gray .....	085366
Red .....	085365
16 l (20.14 kg); 375 µm (15 mils); 42.69 m <sup>2</sup> (459.26 ft <sup>2</sup> )	
Gray .....	084177
Red .....	084178

**ARC SD4i**  
High-Temperature Ceramic-Reinforced Erosion Resistant Coating (P; T; C)\*

0.75 l (1.6 kg); 375 µm (15 mils); 2 m <sup>2</sup> (21.3 ft <sup>2</sup> )	
Gray .....	085890
Blue .....	085889
1125 ml (1.98 kg); 375 µm (15 mils); 3 m <sup>2</sup> (32.3 ft <sup>2</sup> )	
Gray .....	084263
Blue .....	084262
1.5 l (3.2 kg); 375 µm (15 mils); 4M <sup>2</sup> (42.6 ft <sup>2</sup> )	
Gray .....	085881
Blue .....	085880
5 l (8.82 kg); 375 µm (15 mils); 13.33 m <sup>2</sup> (143.52 ft <sup>2</sup> )	
Gray .....	085367
Blue .....	085368
16 l (20.14 kg); 375 µm (15 mils); 42.69 m <sup>2</sup> (459.26 ft <sup>2</sup> )	
Gray .....	084180
Blue .....	084179

**ARC BX5**  
Rapid-Curing, Trowel-Grade Coating for Fine-Particle Moderate Sliding Wear (P; T; C)\*

0.75 l (1.64 kg); 3 mm (120 mils) 0.25 m <sup>2</sup> (2.69 ft <sup>2</sup> )	
Gray .....	084672
Red .....	085670
2.5 l (5.44 kg); 3 mm (120 mils) 0.83 m <sup>2</sup> (8.97 ft <sup>2</sup> )	
Gray .....	085382
Red .....	085673

**ARC MX1**  
Trowel-Grade Coating for Coarse Particle Extreme Sliding Wear and Impact (P; T; C)\*

6 kg; 6 mm (240 mils) 0.37 m <sup>2</sup> (4 ft <sup>2</sup> )	
Blue .....	085324
20 kg; 6 mm (240 mils) 1.23 m <sup>2</sup> (13.2 ft <sup>2</sup> )	
Blue .....	085325

**ARC MX2**  
Trowel-Grade Coating for Fine Particle Severe Sliding Wear (P; T; C)\*

2.5 l (6.08 kg) 3 mm (120 mils); 0.83 m <sup>2</sup> (8.97 ft <sup>2</sup> )	
White .....	085374
16 l (38.9 kg); 3 mm (120 mils); 5.3 m <sup>2</sup> (57.4 ft <sup>2</sup> )	
White .....	085402

### ARC Metal Coating Systems

**MX FG**  
Trowel-Grade Coating for Fine Particle Severe Sliding Wear, FDA Compliant (P; T; C)\*

1.5 l (3.7 kg) 3 mm (120 mils); 0.5 m <sup>2</sup> (5.4 ft <sup>2</sup> )	
White .....	085928
5 l (12.4 kg) 3 mm (120 mils); 1.67 m <sup>2</sup> (18 ft <sup>2</sup> )	
White .....	085928
16 l (39.7 kg); 3 mm (120 mils); 5.3 m <sup>2</sup> (57.4 ft <sup>2</sup> )	
White .....	085934

### ARC Concrete Coating Systems

**ARC 791**  
100% Solids, Novolac Resin Blend, Trowel-Applied, Quartz-Reinforced Concrete, High-Build Concrete Coating (P; T; C)\*

Bulk Kit; 6 mm (240 mils); 16.7 m <sup>2</sup> (180 ft <sup>2</sup> )	
Gray .....	089537
System Kit; 6 mm (240 mils); 4.1 m <sup>2</sup> (44.13 ft <sup>2</sup> )	
Gray .....	082195

**ARC 797**  
Fast-Penetrating, Modified-Epoxy Primer/Sealer (P; T; C)\*

16 l (17.9 kg), 25 mm (10 mils) 64 m <sup>2</sup> (689 ft <sup>2</sup> )	
Amber .....	085409

**ARC 988**  
Highly Chemically Resistant, 100% Solids, Pure Novolac Resin-Based, Trowel Applied, Quartz-Reinforced Concrete, High-Build Concrete Coating (P; T; C)\*

Bulk Kit; 6 mm (240 mils); 16.7 m <sup>2</sup> (180 ft <sup>2</sup> )	
Gray .....	089539
Red .....	089540
System Kit; 6 mm (240 mils); 4.1 m <sup>2</sup> (44.13 ft <sup>2</sup> )	
Gray .....	082197
Red .....	090452

**ARC CS2**  
General Purpose, Thin Film, Novolac Blend, Epoxy Coating (P; T; C)\*

16 l (20.73 kg); 500 µm (20 mils); 32 m <sup>2</sup> (344.45 ft <sup>2</sup> )	
Gray .....	084186

**ARC CS4**  
Highly Chemically Resistant, 100% Novolac Resin, Epoxy Coating (P; T; C)\*

5 l (6.12 kg); 500 µm (20 mils); N/A	
Red .....	085369
16 l (19.54 kg); 500 µm (20 mils); 32 m <sup>2</sup> (344.45 ft <sup>2</sup> )	
Red .....	084187

**ARC EG-1**  
Fast-Setting Grout Resurfacer to Repair/Patch Concrete Surfaces (P; T; C)\*

Patch Kit; 24 x 18.5 kg; 12 mm (472 mils); 14.4 m <sup>2</sup> (153.6 ft <sup>2</sup> )	
Gray .....	085797
System Kit; 18 x 55.8 kg; 12 mm (472 mils); 32.4 m <sup>2</sup> (153.6 ft <sup>2</sup> )	
Gray .....	085861


Technical data notes: 1) Coverage values are theoretical, based on no waste factor or surface profile effects. In practice, 10–20% extra product should be added for waste factor assuming brush, roller, or trowel application. 2) Waste factor for products applied by spray could vary significantly depending on spray equipment, substrate geometry, and environmental conditions. 3) All coverage values based on product temperature of 21°C (70°F).

## MECHANICAL SEAL ORDERING INFORMATION

### KEY TO SEAL MATERIALS

Component	Materials	EN12756	Description
Faces	CB	B	Carbon Graphite, Resin Impregnated
	SSC	Q <sub>1</sub>	Silicon Carbide, Sintered Pressureless
	RSC	Q <sub>2</sub>	Silicon Carbide, Reaction Bonded
	TC	U <sub>2</sub>	Tungsten Carbide, Ni-Binder
	CR	V	Aluminum Oxide, 99.5%
Metals	316	G	CrNiMo Steel (1.4401)
	Alloy-20	M <sub>3</sub>	20 Cb3 (2.4660)
	Ti	T <sub>2</sub>	Titanium (3.7035)
	HC	M <sub>5</sub>	Hastelloy® C-276 (2.4819)
	HB	M <sub>1</sub>	Hastelloy B2 (2.4617)
	Monel®	M <sub>4</sub>	Monel® Alloy K500 (2.4375)
	Duplex	G1	Duplex Steel (1.4462)
	Super Duplex	G4	Duplex Steel (1.4410)
Elastomers	FKM	V	Fluorocarbon
	EPDM	E	Ethylene Propylene
	FEPM	X	Tetrafluoroethylene-Propylene
	FFKM	K <sub>1</sub>	ChemLast™ 550

### QUICK ORDER REFERENCE EXAMPLE

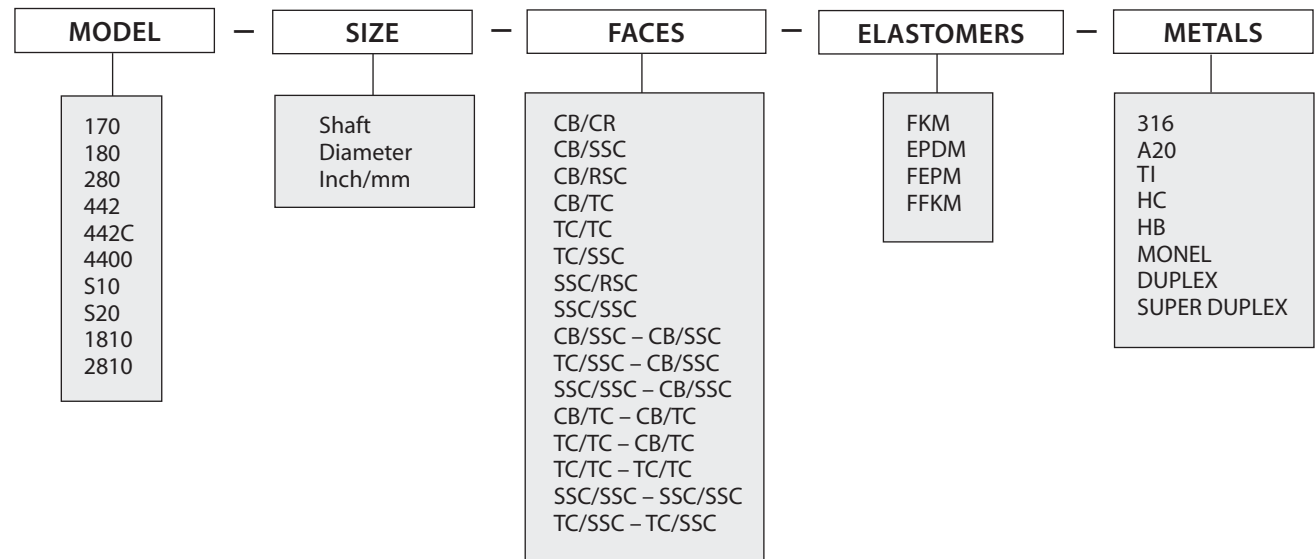



PACKING AND GASKETS ORDERING INFORMATION

Ordering and Certification Information – Packing and Gaskets

370				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
3.2	1/8	0.908	2	037060
4.7	3/16	0.908	2	037062
6.0	-	0.908	2	037063
6.4	1/4	0.908	2	037064
		2.270	5	037073
8.0	5/16	0.908	2	037065
		2.270	5	037074
9.5	3/8	0.908	2	037066
		2.270	5	037075
		4.540	10	037081
10.0	-	0.908	2	037067
		2.270	5	037076
11.0	7/16	0.908	2	037068
		2.270	5	037077
12.0	-	2.270	5	037078
12.5	1/2	0.908	2	037070
		2.270	5	037079
		4.540	10	037083
14.0	9/16	2.270	5	037080
16.0	5/8	4.540	10	037085
17.5	11/16	4.540	10	037086
19.0	3/4	4.540	10	037087
22.0	7/8	4.540	10	037089
25.5	1	4.540	10	037094
38.0	1-1/2	4.540	10	037022

425				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
4.7	3/16	0.908	2	042514
6.4	1/4	0.908	2	042515
		2.270	5	042516
8.0	5/16	0.908	2	042517
		2.270	5	042518
9.5	3/8	0.908	2	042519
		2.270	5	042520
10.0	-	0.908	2	042550
		2.270	5	042551
11.0	7/16	2.270	5	042552
12.0	-	These sizes are available upon request		
12.7	1/2	0.908	2	042553
		2.270	5	042554
		4.540	10	042555
14.0	9/16	2.270	5	042556
16.0	5/8	4.540	10	042557
19.0	3/4	4.540	10	042558
22.0	7/8	4.540	10	042559
25.5	1	These sizes are available upon request		

457				
Thickness		Dimensions		Item Number
mm	Inch	M	Inch	
0.4	1/64	1.52 x 1.52	60 x 60	003851
0.8	1/32	1.52 x 1.52	60 x 60	003852
1.6	1/16	1.52 x 1.52	60 x 60	003853
2.4	3/32	1.52 x 1.52	60 x 60	003854
3.2	1/8	1.52 x 1.52	60 x 60	003855

459				
Thickness		Dimensions		Item Number
mm	Inch	M	Inch	
0.8	1/32	1.00 x 1.00	39.4 x 39.4	005038
0.5	-	1.00 x 1.00	39.4 x 39.4	005042
1.0	-	1.00 x 1.00	39.4 x 39.4	005043
1.6	1/16	1.00 x 1.00	39.4 x 39.4	005039
2.0	-	1.00 x 1.00	39.4 x 39.4	005044
3.2	1/8	1.00 x 1.00	39.4 x 39.4	005040
2.4	3/32	1.00 x 1.00	39.4 x 39.4	005050

477-1				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
3.2	1/8	0.908	2	004752
4.7	3/16	0.908	2	004754
6.0	-	0.908	2	004756
6.4	1/4	0.908	2	004730
		2.270	5	004731
8.0	5/16	0.908	2	004733
		2.270	5	004734
9.5	3/8	0.908	2	004722
		2.270	5	004723
		4.540	10	004724
10.0	-	0.908	2	004758
		2.270	5	004759
11.0	7/16	0.908	2	004736
		2.270	5	004737
12.0	-	0.908	2	004782
		2.270	5	004791
12.7	1/2	0.908	2	004726
		2.270	5	004727
		4.540	10	004728
14.0	9/16	2.270	5	004739
		4.540	10	004740
16.0	5/8	4.540	10	004742
17.5	11/16	4.540	10	004744
19.0	3/4	4.540	10	004700
20.5	13/16	4.540	10	004793
22.0	7/8	4.540	10	004746
24.0	15/16	4.540	10	004796
25.5	1	4.540	10	004748

**PACKING AND GASKETS ORDERING INFORMATION**

1600				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
3.2	1/8	0.908	2	035002
4.0	–	0.908	2	035004
4.7	3/16	0.908	2	035006
6.0	–	0.908	2	035008
6.4	1/4	0.908	2	035010
		2.270	5	035011
8.0	5/16	0.908	2	035013
		2.270	5	035014
9.5	3/8	0.908	2	035016
		2.270	5	035017
		4.540	10	035018
10.0	–	0.908	2	035020
		2.270	5	035021
11.0	7/16	0.908	2	035023
		2.270	5	035024
12.0	–	2.270	5	035026
12.7	1/2	0.908	2	035028
		2.270	5	035029
		4.540	10	035030
14.0	9/16	2.270	5	035032
		4.540	10	035033
16.0	5/8	4.540	10	035035
17.5	11/16	4.540	10	035037
19.0	3/4	4.540	10	035039
22.0	7/8	4.540	10	035041
25.4	1	4.540	10	034943

1601				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
3.2	1/8	0.908	2	034902
4.0	–	0.908	2	034904
4.7	3/16	0.908	2	034906
6.0	–	0.908	2	034908
6.4	1/4	0.908	2	034910
		2.270	5	034911
8.0	5/16	0.908	2	034913
		2.270	5	034914
9.5	3/8	0.908	2	034916
		2.270	5	034917
		4.540	10	034918
10.0	–	0.908	2	034920
		2.270	5	034921
11.0	7/16	0.908	2	034923
		2.270	5	034924
12.0	–	2.270	5	034926
12.7	1/2	0.908	2	034928
		2.270	5	034929
		4.540	10	034930
14.0	9/16	2.270	5	034932
		4.540	10	034933
16.0	5/8	4.540	10	034935
17.5	11/16	4.540	10	034937
19.0	3/4	4.540	10	034939
22.0	7/8	4.540	10	034941
25.4	1	4.540	10	034943

1622™					
Cross Section Size		Average Stem Diameter		Average No. of Valves (per box)	Item Number
mm	Inch	mm	Inch		
	1/8		0.500	83	054700
	3/16		0.625	59	054701
6.0		25		31	054702
6.4	1/4		0.875	73	054703
8.0	5/16		1.250	39	054705
9.5	3/8		1.625	22	054707
10.0		40		24	054711
11.0	7/16		2.000	14	054713
12.0		70		9	054715
12.7	1/2		2.750	8	054716
14.0	9/16		3.250	6	054719
16.0	5/8		4.000	4	054721
17.5	11/16		5.000	3	054722
19.0	3/4	These sizes are available on request.			
20.0					
22.0	7/8				
25.4	1				

**PACKING AND GASKETS ORDERING INFORMATION**

Ordering and Certification Information – Packing and Gaskets

1724™				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
3.2	1/8	0.908	2	003260
4.0	–	0.908	2	003261
4.7	3/16	0.908	2	003262
6.0	–	0.908	2	003263
6.4	1/4	0.908	2	003264
		2.270	5	003273
8.0	5/16	0.908	2	003265
		2.270	5	003274
9.5	3/8	0.908	2	003266
		2.270	5	003275
		4.540	10	003281
10.0	–	0.908	2	003267
		2.270	5	003276
11.0	7/16	0.908	2	003268
		2.270	5	003277
12.0	–	0.908	2	003269
		2.270	5	003278
12.7	1/2	0.908	2	003270
		2.270	5	003279
		4.540	10	003283
14.0	9/16	2.270	5	003280
		4.540	10	003284
16.0	5/8	4.540	10	003285
17.5	11/16	4.540	10	003286
19.0	3/4	4.540	10	003287
20.5	13/16	4.540	10	003288
22.0	7/8	4.540	10	003289
24.0	15/16	4.540	10	003293
25.4	1	4.540	10	003294

1725A				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
6.4	1/4	0.908	2	041020
		2.270	5	041027
8.0	5/16	0.908	2	041029
		2.270	5	041030
9.5	3/8	0.908	2	041031
		2.270	5	041033
10.0	–	0.908	2	041038
		2.270	5	041044
11.0	7/16	2.270	5	041046
12.0	–	2.270	5	041048
12.7	1/2	0.908	2	041049
		2.270	5	041050
		4.540	10	041051
14.0	9/16	2.270	5	041052
16.0	5/8	4.540	10	041053
19.0	3/4	4.540	10	041074
20.5	13/16	4.540	10	041075
22.0	7/8	4.540	10	041076
25.4	1	4.540	10	041078

1730				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
6.0	–	0.908	2	000637
6.4	1/4	0.908	2	000638
		2.270	5	000691
8.0	5/16	0.908	2	000692
		2.270	5	000693
9.5	3/8	2.270	5	000694
		4.540	10	000695
10.0	–	0.908	2	000696
		2.270	5	000697
11.0	7/16	2.270	5	000698
12.0	–	0.908	2	000702
		2.270	5	000703
12.7	1/2	2.270	5	000704
		4.540	10	000705
14.0	9/16	2.270	5	000706
		4.540	10	000932
16.0	5/8	4.540	10	000933
17.5	11/16	4.540	10	000934
19.0	3/4	4.540	10	000935
20.5	13/16	4.540	10	001182
22.0	7/8	4.540	10	001183
25.4	1	4.540	10	001184

PACKING AND GASKETS ORDERING INFORMATION

1730-SC				
Size		Packaged ± 5%		Item Number
mm	Inch	kg	lbs	
9.5	3/8	2.270	5	003437
		4.540	10	003576
10.0	-	0.908	2	003577
		2.270	5	003601
11.0	7/16	2.270	5	003659
12.0	-	0.908	2	003660
		2.270	5	003661
12.5	1/2	2.270	5	003897
		4.540	10	003983
14.0	9/16	2.270	5	003984
		4.540	10	003985
16.0	5/8	4.540	10	003986
17.5	11/16	4.540	10	004059
19.0	3/4	4.540	10	004255
20.5	13/16	4.540	10	004256
22.0	7/8	4.540	10	004272
25.5	1	4.540	10	004276

1760				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
3.2	1/8	0.908	2	008360
4.7	3/16	0.908	2	008362
6.0	-	0.908	2	008363
6.4	1/4	0.908	2	008364
		2.270	5	008373
8.0	5/16	0.908	2	008365
		2.270	5	008374
9.5	3/8	0.908	2	008366
		2.270	5	008375
		4.540	10	008381
10.0	-	0.908	2	008367
		2.270	5	008376
11.0	7/16	0.908	2	008368
		2.270	5	008377
12.0	-	0.908	2	008369
		2.270	5	008378
12.7	1/2	0.908	2	008370
		2.270	5	008379
		4.540	10	008383
14.0	9/16	2.270	5	008380
16.0	5/8	4.540	10	008385
17.5	11/16	4.540	10	008386
19.0	3/4	4.540	10	008387
20.5	13/16	4.540	10	008388
22.0	7/8	4.540	10	008389
25.4	1	4.540	10	008394

1830-SSP				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
8.0	5/16	These sizes are available on request.		
9.5	3/8	0.908	2	052605
		2.270	5	052606
		4.540	10	052607
10.0	-	0.908	2	052608
		2.270	5	052609
11.0	7/16	0.908	2	052610
		2.270	5	052611
12.0	-	0.908	2	052612
		2.270	5	052613
12.5	1/2	0.908	2	052614
		2.270	5	052615
		4.540	10	052616
14.0	9/16	2.270	5	052617
		4.540	10	052618
16.0	5/8	4.540	10	052619
17.5	11/16	4.540	10	052620
19.0	3/4	4.540	10	052621
20.0	-	4.540	10	052622
20.5	13/16	These sizes are available on request.		
22.0	7/8	4.540	10	052624
24.0	15/16	4.540	10	052625
25.5	1	4.540	10	052626

CMS 2000	
Description	Item Number
White CMS 2000 Cartridge	001048
White CMS 2000 Injectable 13.2 liter	001047
White CMS 2000 Injectable 3.8 liter	001046
CMS 2000-FP, 1 gallon pail	127533
CMS 2000-FP, 1 quart pail	127532

Stabilizer Cage					
Cross Section Size		Spacer Pin Quantity	Spacer Pin Length		Item Number
mm	Inch		mm	Inch	
10	3/8	12	31.75	1.250	001638
11	7/16	12	38.10	1.500	001639
12	1/2	12	47.75	1.880	001641
14	9/16	12	50.80	2.000	001642
16	5/8	12	57.15	2.250	001643
19	3/4	12	66.80	2.630	001662

The Stabilizer Cage is rated for a maximum service temperature of 110°C (230°F)

**PACKING AND GASKETS ORDERING INFORMATION**

Ordering and Certification Information – Packing and Gaskets

DualPac® 2211				
Size		Packaged ± 10%		Item Number
mm	Inch	kg	lbs	
8.0	5/16	0.908	2	394368
9.5	3/8	0.908	2	382074
		2.270	5	382075
		4.540	10	382076
10.0	-	0.908	2	382077
		2.270	5	382078
11.1	7/16	0.908	2	382079
		2.270	5	382080
12.0	-	0.908	2	382081
		2.270	5	382082
12.7	1/2	0.908	2	382083
		2.270	5	382084
		4.540	10	382085
14.0	-	4.540	10	382092
14.3	9/16	2.270	5	382086
		4.540	10	382087
15.9	5/8	4.540	10	382088
17.5	11/16	4.540	10	382089
19.0	3/4	4.540	10	382090
20.0	-	4.540	10	382091
20.6	13/16	4.540	10	382073
22.2	7/8	4.540	10	382093
24	15/16	4.540	10	382094
25.4	1	4.540	10	382095

DualPac® 2212				
Size		Package		Item Number
mm	Inch	kg	lbs	
6.4	1/4	0.908	2	404539
8.0	5/16	0.908	2	404540
9.5	3/8	0.908	2	395279
		2.270	5	395280
		4.540	10	395281
10.0	-	0.908	2	395282
		4.540	5	395283
11.1	7/16	0.908	2	395284
		2.270	5	395285
12.0	-	0.908	2	395286
		2.270	5	395287
12.7	1/2	0.908	2	395288
		2.270	5	395289
		4.540	10	395290
14.0	-	4.540	10	395291
14.3	9/16	2.270	5	395292
		4.540	10	395293
16	5/8	4.540	10	395295
17.5	11/16	4.540	10	395296
19.0	3/4	4.540	10	395297
20.0	-	4.540	10	395298
20.6	13/16	4.540	10	395299
22.2	7/8	4.540	10	395300
24	15/16	4.540	10	395301
25.4	1	4.540	10	395303

ECS-T				
Thickness		Dimensions		Item Number
mm	Inch	M	Inch	
0.8	1/32	1.19 x 1.19	47 x 47	058109
1.5	-	1.5 x 1.5	59 x 59	058115
1.6	1/16	1.5 x 1.5	59 x 59	058108
2.0	-	1.5 x 1.5	59 x 59	058116
2.4	3/32	1.5 x 1.5	59 x 59	058112
3.2	1/8	1.5 x 1.5	59 x 59	058111
FDA Sheets				
0.8	1/32	1.19 x 1.19	47 x 47	058132
1.5	-	1.5 x 1.5	59 x 59	058136
1.6	1/16	1.5 x 1.5	59 x 59	058131
2.0	-	1.5 x 1.5	59 x 59	058137
2.4	3/32	1.5 x 1.5	59 x 59	058134
3.2	1/8	1.5 x 1.5	59 x 59	058133



### PACKING AND GASKETS ORDERING INFORMATION

ID Inch	OD Inch	Cross Section	5800E	5800
			Item Number	Item Number
0.312	0.750	0.219	005456	009179
0.375	0.750	0.187	005454	009104
0.375	0.875	0.250	005445	009107
0.437	0.812	0.187	005461	008227
0.437	1.125	0.344	005493	008310
0.437	0.687	0.500	005540	-
0.500	0.875	0.187	005453	009113
0.500	1.000	0.250	005446	009116
0.511	1.062	0.275	005541	008312
0.562	1.000	0.218	005528	053157
0.625	1.000	0.187	005452	009119
0.625	1.125	0.250	005463	009149
0.629	1.023	0.197	005534	008293
0.750	1.125	0.187	005529	052847
0.750	1.250	0.250	005455	009122
0.750	1.375	0.312	005447	009125
0.750	1.500	0.375	005544	052848
0.787	1.496	0.354	005543	010409
0.875	1.250	0.187	005449	008271
0.875	1.375	0.250	005471	009152
0.875	1.500	0.312	005472	008300
0.905	1.417	0.256	005542	052924
0.937	2.312	0.687	005555	052850
1.000	1.375	0.187	005521	044749
1.000	1.500	0.250	005482	009128
1.000	1.625	0.312	005444	009131
1.000	1.750	0.375	005484	008237
1.125	1.625	0.250	005450	009134
1.125	1.750	0.312	005547	009137
1.125	1.875	0.375	005549	052968
1.125	2.312	0.594	005554	052906
1.125	2.375	0.625	005557	052925
1.125	2.500	0.687	005559	044753
1.181	1.772	0.296	005548	052898
1.181	1.811	0.315	005526	052844
1.250	1.625	0.187	005545	009188
1.250	1.750	0.250	005520	009158
1.250	1.912	0.331	005532	052913
1.250	2.000	0.375	005457	009143
1.250	2.250	0.500	005553	052926
1.250	2.625	0.687	005561	008247
1.255	1.925	0.335	005550	052927
1.260	1.732	0.236	005546	044754
1.375	2.000	0.312	005551	009155
1.375	2.125	0.375	005552	009164
1.375	2.375	0.500	005556	052851
1.500	2.000	0.250	005496	009182
1.500	2.125	0.312	005486	008250

ID Inch	OD Inch	Cross Section	5800E (cont.)	5800 (cont.)
			Item Number	Item Number
1.500	2.250	0.375	005488	009146
1.500	2.281	0.390	005497	052928
1.625	2.375	0.375	005536	009700
1.625	2.625	0.500	005560	052929
1.750	2.250	0.250	005538	010663
1.750	2.500	0.375	005558	010408
1.750	2.750	0.500	005522	044752
1.875	2.500	0.312	005523	044756
1.875	2.625	0.375	005535	044748
2.000	2.500	0.250	005451	009176
2.000	3.000	0.500	005562	044746
2.035	3.060	0.513	005563	052893
2.125	3.125	0.500	005595	052930
2.125	3.155	0.515	005596	052909
2.250	3.250	0.500	006059	052879
2.500	3.000	0.250	005530	008314
2.500	3.250	0.375	005597	052846
2.500	3.530	0.515	006130	052915
2.500	3.560	0.500	006144	052932
3.000	4.000	0.500	006145	052933
3.000	4.125	0.562	006135	008301

Additional sizes available, please consult with a Chesterton Application Engineer.

GraphMax™				
Size		Packaged ± 5%		Item Number
mm	Inch	kg	lbs	
9.5	3/8	0.908	2	150004
		2.270	5	150005
		3.175	7	150006
10.0	-	0.908	2	150007
		2.270	5	150008
11.0	7/16	0.908	2	150009
		2.270	5	150010
12.0	-	0.908	2	150011
		2.270	5	150012
12.7	1/2	0.908	2	150013
		2.270	5	038740
		3.175	7	038741
14.0	9/16	2.270	5	038738
		3.175	7	038744
16.0	5/8	3.175	7	038742
17.5	11/16	3.175	7	150019
19.0	3/4	3.175	7	038743
20.0	-	3.175	7	150021
20.5	13/16	3.175	7	150022
22.2	7/8	3.175	7	150023
24.0	15/16	3.175	7	150024
25.4	1	3.175	7	150025

Ordering and Certification Information – Packing and Gaskets

PACKING AND GASKETS ORDERING INFORMATION

Ordering and Certification Information – Packing and Gaskets

SuperSet™ Product Item to fit Ahlstrom® APP				
Bearing Unit	ID x OD x Cross Section mm	Number of Rings	Packing Type	Item Number
1	40 x 60 x 10.0	2	1400R	210204
			1730	210201
			1760	210202
			370	210203
			477-1T	210205
			DualPac® 2211	389777
2	50 x 70 x 10.0	2	1400R	210210
			1730	210206
			1760	210207
			370	210209
			477-1T	210211
			DualPac 2211	389778
3	60 x 85 x 12.5	2	1400R	210215
			1730	210212
			1760	210213
			370	210214
			477-1T	210216
			DualPac 2211	389779
4	70 x 95 x 12.5	2	1400R	210221
			1730	210217
			1760	210218
			370	210219
			477-1T	210222
			DualPac 2211	389780
5	90 x 122 x 16.0	2	1400R	210227
			1730	210223
			1760	210225
			370	210226
			477-1T	210228
			DualPac 2211	389781
6	100 x 132 x 16.0	2	1400R	210233
			1730	210229
			1760	210231
			370	210232
			477-1T	210234
			DualPac 2211	389782

Ahlstrom® is a registered trademark of Ahlstrom Corporation.

SuperSet Product Item to fit Ahlstrom APT				
Bearing Unit	ID x OD x Cross Section Inch	Number of Rings	Packing Type	Item Number
1	1.625 x 2.375 x 0.375	2	1400R	210239
			1730	210236
			1760	210237
			370	210238
			477-1T	210241
			DualPac 2211	389783
2	2.000 x 2.750 x 0.375	2	1400R	210245
			1730	210242
			1760	210243
			370	210244
			477-1T	210246
			DualPac 2211	389784
3	2.375 x 3.375 x 0.500	2	1400R	210250
			1730	210247
			1760	210248
			370	210249
			477-1T	210251
			DualPac 2211	389785
4	2.750 x 3.750 x 0.500	2	1400R	210255
			1730	210252
			1760	210253
			370	210254
			477-1T	210257
			DualPac 2211	389786
5	3.500 x 4.750 x 0.625	2	1400R	210262
			1730	210258
			1760	210259
			370	210261
			477-1T	210263
			DualPac 2211	389787
6	3.937 x 5.197 x 0.625	2	1400R	210267
			1730	210264
			1760	210265
			370	210266
			477-1T	210268
			DualPac 2211	389788

### PACKING AND GASKETS ORDERING INFORMATION

SuperSet™ Product Item to fit Goulds®				
Pump Model	ID x OD x Cross Section Inch	Number of Rings	Packing Type	Item Number
3175 L	4.750 x 5.750 x 0.500	3	1400R	210033
			1730	210030
			1760	210031
			370	210032
			477-1T	210034
			DualPac® 2211	389789
3175 M	3.750 x 4.750 x 0.500	3	1400R	210028
			1730	210025
			1760	210026
			370	210027
			477-1T	210029
			DualPac 2211	389790
3175 S	3.000 x 4.000 x 0.500	3	1400R	210023
			1730	210020
			1760	210021
			370	210022
			477-1T	210024
			DualPac 2211	389791
3196 LT	2.125 x 2.875 x 0.375	3	1400R	210013
			1730	210010
			1760	210011
			370	210012
			477-1T	210014
			DualPac 2211	389792
3196 MT	1.750 x 2.50 x 0.375	3	1400R	210008
			1730	210005
			1760	210006
			370	210007
			477-1T	210009
			DualPac 2211	389793
3196 ST	1.375 x 2.00 x 0.3125	3	1400R	210003
			1730	210000
			1760	210001
			370	210002
			477-1T	210004
			DualPac 2211	389794
3196 XLT	2.500 x 3.375 x 0.4375	3	1400R	210018
			1730	210015
			1760	210016
			370	210017
			477-1T	210019
			DualPac 2211	389795

Goulds® is a registered trademark of ITT Manufacturing Enterprises LLC.

SuperSet Product Item to fit Warman®				
Pump Model	ID x OD x Cross Section Inch	Number of Rings	Packing Type	Item Number
B Frame	1.785 x 2.435 x 0.3125	3	1730	210738
			1830-SSP	212036
			412-W	212055
			DualPac 2211	389796
			1730	210739
C Frame	2.312 x 3.064 x 0.375	3	1830-SSP	212040
			412-W	212038
			GraphMax™	212039
			DualPac 2211	389797
			1730	210741
D Frame	3.250 x 4.250 x 0.500	3	1830-SSP	212044
			412-W	212042
			GraphMax	212043
			DualPac 2211	389798
			1730	210742
E Frame	4.000 x 5.250 x 0.625	3	1830-SSP	212048
			412-W	212046
			GraphMax	212047
			DualPac 2211	389799
			1730	210744
F Frame	5.125 x 6.625 x 0.750	3	1830-SSP	212052
			412-W	212050
			GraphMax	212051
			DualPac 2211	389800
			1730	210744

Warman® is a registered trademark of Weir Minerals.

## INDUSTRIAL LUBRICANTS AND MRO PRODUCTS ORDERING INFORMATION

<b>274 Industrial Degreaser</b>	
20 l .....	081006
208 l .....	081013
Aerosol 350 g - ECSU .....	081676
<b>276 Electronic Component Cleaner</b>	
20 l .....	081623
208 l .....	081624
Aerosol 250 g - ECSU .....	081622
<b>279 PCS: Precision Cleaning Solvent</b>	
Aerosol 250 g - ECSU .....	083434
<b>292 Precision Degreasing Solvent</b>	
Aerosol 250 g - ECSU .....	080529
<b>294 Critical Surface Degreaser</b>	
Aerosol 379 g ECSU .....	080783
<b>296 Electro Contact Cleaner</b>	
Aerosol 250 g - ECSU .....	088650
<b>390 Cutting Oil</b>	
Aerosol 370 g - ECSU .....	080102
<b>601 Chain Drive Pin and Bushing Lubricant</b>	
3.8 l (1 gal) .....	081904
20 l .....	081910
208 l .....	081907
Aerosol 350 g - ECSU .....	081902
<b>610 Plus Synthetic Lubricating Fluid</b>	
3.8 l (1 gal) .....	084296
20 l .....	084297
208 l .....	084295
<b>610 HT Synthetic Lubricating Fluid</b>	
3.8 l (1 gal) .....	083765
20 l .....	080418
208 l .....	080419
<b>610 MT Plus Synthetic Lubricating Fluid</b>	
20 l .....	082852
208 l .....	082853
<b>613 Moly Grease</b>	
18 kg .....	089407
400 g .....	089409
<b>615 HTG #1 High-Temperature Grease</b>	
400 g .....	086935
18 kg .....	086936
55 kg .....	086007
180 kg .....	080725
<b>615 HTG #2 High-Temperature Grease</b>	
400 g .....	080042
18 kg .....	080043
55 kg .....	080045
180 kg .....	080728

<b>615 HTG #2 - 460 High-Temperature Grease</b>	
400 g .....	084204
18 kg .....	084205
180 kg .....	084190
<b>625 CXF</b>	
400 g .....	080707
18 kg .....	080705
55 kg .....	080706
<b>630 SXCF Grease</b>	
400 g .....	082713
18 kg .....	082711
55 kg .....	082714
Aerosol 285 g - ECSU .....	088687
<b>630 SXCF 220 #1 Grease</b>	
400 g .....	085768
18 kg .....	085769
55 kg .....	085770
180 kg .....	085771
<b>635 SXC Grease</b>	
400 g .....	088556
18 kg .....	088557
55 kg .....	088558
180 kg .....	088559
<b>652 Pneumatic Lubricant and Conditioner</b>	
475 ml .....	086888
20 l .....	086000
208 l .....	083018
<b>690 FG (Food-Grade Lubricant)</b>	
3.8 l (1 gal) .....	082703
20 l .....	082710
208 l .....	082705
Aerosol 350 g - ECSU .....	082706
<b>715 Spraflex®</b>	
20 l .....	081709
208 l .....	081707
Aerosol 350 g - ECSU .....	081702
<b>715 Spraflex® Gold</b>	
3.8 l (1 gal) .....	081896
20 l .....	081897
208 l .....	081898
Aerosol 300 g - ECSU .....	082015
<b>723 Sprasolvo™</b>	
Aerosol 350 g - ECSU .....	081308
<b>723 FG Sprasolvo</b>	
Aerosol 350 g - ECSU .....	083770

## INDUSTRIAL LUBRICANTS AND MRO PRODUCTS ORDERING INFORMATION

<b>725 Nickel Anti-Seize Compound</b>			
250 g Brush Top .....	081266	<b>803 Industrial and Marine Solvent II</b>	
500 g Brush Top .....	082359	3.8 l (1 gal).....	086774
20 l (24 kg) .....	082349	20 l .....	090379
Aerosol 350 g - ECSU.....	082351	208 l.....	090388
		1000 l .....	086768
<b>730 Spragrip® Belt Dressing</b>			
Aerosol 320 g - ECSU.....	080308	<b>820 KPC</b>	
		20 l .....	082260
<b>740 Heavy-Duty Rust Guard</b>			
3.8 l (1 gal).....	087705	208 l.....	082264
20 l .....	087704	1000 l .....	083555
208 l.....	087707	<b>820N KPC</b>	
Aerosol 300 g - ECSU.....	087702	20 l .....	088584
		208 l.....	088585
		1000 l .....	088586
<b>752 Cold Galvanizing Compound</b>			
2.7 kg.....	082603	<b>860 Moldable Polymer Gasketing Kit</b>	
Aerosol 350 g.....	082601	Kit: 2 Aerosol and 2 Cartridges.....	086310
<b>763 Rust Transformer®</b>			
3.8 l (1 gal).....	089417	<b>900 GoldEnd® Paste</b>	
20 l .....	089418	20 l .....	000936
208 l.....	089419	200 g.....	000908
		500 g Brush Top .....	000909
<b>772 Premium Nickel Anti-Seize Compound</b>			
500 g Brush Top .....	082381	<b>Lubri-Cup™ EM Series</b>	
<b>775 Moisture Shield</b>			
20 l .....	082110	Lubri-Cup EM 250cc Main .....	084307
208 l .....	082107	Lubri-Cup EM 500cc Main .....	084510
Aerosol 350 g - EXSU .....	082102	Lubri-Cup EM-X 250cc Main.....	084308
		Lubri-Cup EM-S 250cc Main	
		(Relay Box Included Price).....	084309
		Lubri-Cup EM-SP 250cc for DC Power	
		(Power Supply Included Price).....	084311
		Lubri-Cup EM-VS 60/121//240cc .....	085840
<b>783 ACR Corrosion-Resistant Anti-Seize</b>			
250 g Brush Top .....	082805	<b>Lubri-Cup™ OL 500 Oiler</b>	
500 g Brush Top .....	088653	Battery Operated.....	084319
20 l (24 kg) .....	088654	with AC Power Supply .....	084457
		with DC Power Supply.....	084464
<b>785 Parting Lubricant</b>			
200 g .....	086907	<b>Lubri-Cup™ VG</b>	
250 g Brush Top .....	082016	250cc with 615#1 HTG Grease.....	084304
500 g Brush Top .....	080747	250cc with 615#2 HTG Grease.....	084305
20 l (24 kg) .....	080748	250cc with 615#2-460 HTG Grease.....	085783
Aerosol 350 g - ECSU.....	081664	250cc with 630 SXCF Grease .....	084306
		250cc with 633 SXCM Grease .....	084404
		250cc with 635 SXC Grease .....	084383
<b>785 FG Parting Lubricant</b>			
250 g Brush Top .....	088506	<b>Lubri-Cup™ VG Mini</b>	
500 g Brush Top .....	080788	120cc with 630 SXCF Grease.....	084473
		120cc with 615#2 HTG Grease.....	084477
		120cc with 635 SXC Grease .....	084492
<b>800 GoldEnd® Tape</b>			
6.4 mm x 13.72 m (1/4 x 540").....	000805		
12.7 mm x 4.57 m (1/2 x 180").....	000801		
12.7 mm x 13.72 m (1/2 x 540").....	000802		
12.7 mm x 32.92 m (1/2 x 1 296").....	000803		
19.1 mm x 13.72 m (3/4 x 540").....	000804		
25.4 mm x 13.72 m (1 x 540") .....	000806		



## POLYMER SEALS ORDERING INFORMATION

To place an order, the required information is needed:


- Product profile
- Product material
- Equipment dimensions

**For example:**

To place an order for a hydraulic rod seal with a 50 mm rod diameter, a bore diameter of 70 mm and a stuffing box height of 15 mm, the following information is required.

**To place an order: Rod Seal**

Product Profile	R22KN
Material (AWC designation)	AWC800
Rod diameter (d)	50 mm
Bore diameter (D <sub>1</sub> )	70 mm
Groove height (L <sub>1</sub> )	15 mm

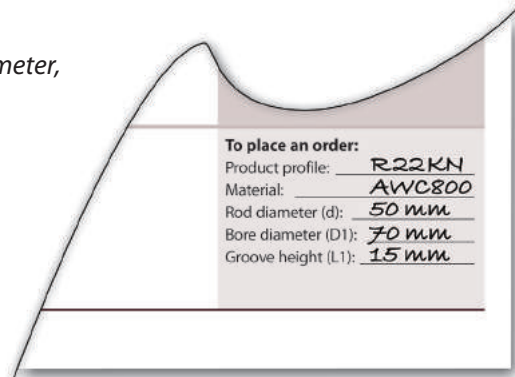

## PRODUCT APPROVALS AND CERTIFICATIONS

### Mechanical Seals

Application	Certifications/Approvals	Product
ATEX	ATEX Cat 1 (Group 2)	442™, 280™, 2810
Drinking Water	ACS Approved	442™, 150
Drinking Water	NSF-61	442C, 442, 180™, 1810, S10
Food Contact	FDA - 21 CFR	442, 442C, 180, 280, S10, S20, 155, 255, 1810, 2810
Fugitive Emission Control	TA Luft/VDI 2440	280, 4400

### Compression Packing

Application	Certifications/Approvals	Product
Fugitive Emission Control	API-589 (Fire Safe) - API-607 (Fire Safe)	1600
Fugitive Emission Control	API-622 - API-607 (Fire Safe) - TA Luft/VDI 2440 -ISO 15848-1*	1622™
Fugitive Emission Control	API-589 (Fire Safe)	5800
Fugitive Emission Control	TA Luft/VDI 2440	1600/477-1 LL
Fugitive Emission Control	TA Luft/VDI 2440	1724™/477-1 LL
Fugitive Emission Control	TA Luft/VDI 2440	1724 Low E
Fugitive Emission Control	API-589 (Fire Safe)	5300GTPG/ 1600
Fugitive Emission Control	API-589 (Fire Safe)	5800E
Fugitive Emission Control	API-589 (Fire Safe)	5800T
Military	MIL P-24790(SH)	1760
Nuclear	Nuclear 10CFR pt21	1601
Nuclear	Nuclear 10CFR pt21	5800
Oxygen Compatible	BAM Oxygen	1730
Oxygen Compatible	BAM Oxygen	1830
Oxygen Compatible	BAM Oxygen	1724-OX

\*Valve Test Standard

**Note:** The above certifications and compliance are available on request.

## PRODUCT APPROVALS AND CERTIFICATIONS

### Flange Gaskets

Application	Certifications/Approvals	Product
Food Contact	EC1935 - 2004 - FDA 21 CFR	ECS-T
Fugitive Emission Control	TA Luft/VDI 2440	ECS-T
Fugitive Emission Control	TA Luft/VDI 2440	Steel Trap™
Marine	ABS Approval Shipping	ECS-T

### Polymer Seals

Application	Certifications/Approvals	Material
Food Contact	EC1935 - 2004 - FDA 21 CFR	AWC510
Food Contact	FDA 21 CFR	AWC520
Food Contact	FDA 21 CFR	AWC600 FDA POLYESTER TPE
Food Contact	FDA 21 CFR	AWC610
Food Contact	EC1935 - 2004 - FDA 21 CFR	AWC615
Food Contact	FDA 21 CFR	AWC650
Food Contact	FDA 21 CFR	AWC664 OIL FILLED OFF WHITE NYLON
Food Contact	FDA 21 CFR	AWC703
Food Contact	FDA 21 CFR	AWC716 WHITE FKM
Food Contact	FDA 21 CFR, EU 1935/2004	AWC737 80A Blue NBR
Food Contact	FDA 21 CFR	AWC741
Food Contact	FDA 21 CFR	AWC753
Food Contact	EC1935 - 2004 - FDA 21 CFR	AWC754
Food Contact	FDA 21 CFR	AWC762 WHITE SILICON
Food Contact	FDA 21 CFR	AWC830
Food Contact	FDA 21 CFR, 3A Sanitary, EU 1935/2004, EU 10/2011	AWC839 Blue 95A Urethane

### ARC

Application Area	Approvals	Product
Drinking Water - Joining and Sealing Material	NSF Standard 61 - US Potable Water (Hot Water)	ARC 5ES
Drinking Water - Protective (Barrier) Materials	NSF Standard 61 - US Potable water (Tanks, Pipes, Valves, Pumps and Fittings)	ARC S1PW
Metal Repair and Hull Smoothing Types I and II	Mil Spec Approval - MIL-PRF-24176 (QPL-24176)	ARC 10
Metal Repair and Hull Smoothing Types I and II	Mil Spec Approval - MIL-PRF-24176 (QPL-24176)	ARC 858
Drinking Water	WRAS Approval Cold Water (UK Potable Water)	ARC S2
Drinking Water	Global Migration Test for Water Approval (Iren Test Lab)	ARC S2
Drinking Water	Global Migration Test for Water Approval (Iren Test Lab)	ARC CS2
Food Contact	Tested to Regulation (EC) No. 1935/2004	ARC 791
Food Contact	Tested to Regulation (EC) No. 1935/2004	ARC S1PW
Food Contact	Tested to 21 CFR 175.300	MX FG

*Note: The above certifications and compliance are available on request.*

## PRODUCT APPROVALS AND CERTIFICATIONS

## Industrial Lubricants and MRO Products

Product	NSF	FDA	Military/Federal Specification	Other
274 Industrial Degreaser	C1, K1, K2 133955 C1, K1, K2 133949 (aerosol)	178.3530	-	-
276 Electronic Component Cleaner	K2 133974 (bulk) K2 133973 (aerosol)	172.882 172.884 178.3530 178.3650		
279 PCS	K2 134012	-	-	German IGI250121/29
294 CSD	C1, K1, K3 143867			
296 Electro Contact Cleaner	K2 134002	-	-	-
390 Cutting Oil	H2, U2 134014 H2, U2 134947 (aerosol)	-	-	-
601 Chain Drive Pin and Bushing Lubricant	H2 133927 (aerosol) H2 133979 (bulk)	-	-	- CFIA
610 Plus Synthetic Lubricating Fluid	H2 153827 (bulk)	-	-	-
615 HTG #1	H2 133941	-	-	-
615 HTG #2	H2 133940	-	-	-
630 SXCF	H1 158844 (bulk) H1 142462 (aerosol)	178.3570	-	-
630 SXCF 220 #1	H1 157331	178.3570	-	-
650 AML	H1	178.3570		
652 Pneumatic Lubricant and Conditioner	H2 133944	-	-	-
690 FG Lubricant	H1 133933 (aerosol) H1 133969 (bulk)	178.3620	-	- CFIA
715 Spraflex® Standard and Gold	H2 133938 H2 133934 (aerosol) H2 133930 (Gold) H2 133931 (Gold aerosol)	-	-	-
720 CCG	H1	178.3570		
723 Sprasolvo™	H2 133939	-	-	-
723 FG Sprasolvo™	H1 132237	178.3570		
725 Nickel Anti-Seize Compound	H2 133959	-	MIL-A-907	CFIA
730 Spragrip®	P1 133947	-	-	-
740 Heavy-Duty Rust Guard	-	-	MIL-C-16173D Grade 1 & 4	-
752 Cold Galvanizing Compound	-	-	MIL-P-46105 MIL-P-26915 MIL-P-21035	-
772 Premium Nickel Anti-Seize Compound	-	-	MIL-A-907F	GE TIL 1117-3R1 GE D50YP12 GE NEDC-31735P
785 Parting Lubricant (Bulk)	H2 133960	-		-
785 FG Parting Lubricant (Bulk)	H1 132237	178.3570		-

For the most current listings and full descriptions of the category codes please visit [NSF.org/usda/psnclistings.asp](https://www.nsf.org/usda/psnclistings.asp)

## PRODUCT APPROVALS AND CERTIFICATIONS

### Industrial Lubricants and MRO Products

Product	NSF	FDA	Military/Federal Specification	Other
800 GoldEnd® Tape	H1, S2 134016	177.1615 177.1550	MIL-T-27730A	UL® Listed, UL Listed to Canadian safety standards Oxygen tested per ISO 10297 and ISO 11114-3, Oxygen certified BAM Ref. No. 11.1/46 513 Certified Food-Grade 1935-2004
803 Industrial and Marine Solvent II	A1 133966	–	–	–
860 Moldable Polymer Gasketing	P1 134017 (aerosol) P1 134018 (curing)	175.300 177.2600	–	– CFIA
900 GoldEnd® Paste	H2, S2 133957	–	–	UL® Listed, CFIA
Lubri-Cup™ VG Mini				IP68, UL® Listed, ATEX
Lubri-Cup™ VG				IP68, UL® Listed, ATEX
Lubri-Cup™ EM-X				IP54, UL® Listed

*For the most current listings and full descriptions of the category codes please visit [NSF.org/usda/psncllistings.asp](http://NSF.org/usda/psncllistings.asp)*









## Global Solutions, Local Service

Since its founding in 1884, the A.W. Chesterton Company has successfully met the critical needs of its diverse customer base. Today, as always, customers count on Chesterton solutions to increase equipment reliability, optimize energy consumption, and provide local technical support and service wherever they are in the world.

Chesterton's global capabilities include:

- Servicing plants in over 113 countries
- Global manufacturing operations
- More than 500 Service Centers and Sales Offices worldwide
- Over 1200 trained local Service Specialists and Technicians

Visit our website at [chesterton.com](http://chesterton.com)



Chesterton ISO certificates available on  
[chesterton.com/corporate/iso](http://chesterton.com/corporate/iso)

Distributed by:

Technical data reflects results of laboratory tests and is intended to indicate general characteristics only. A.W. Chesterton Company disclaims all warranties express, or implied, including warranties of merchantability and fitness for a particular purpose. Liability, if any, is limited to product replacement only. Any images contained herein are for general illustrative or aesthetic purposes only and are not intended to convey any instructional, safety, handling or usage information or advice respecting any product or equipment. Please refer to relevant Safety Data Sheets, Product Data Sheets, and/or Product Labels for safe use, storage, handling, and disposal of products, or consult with your local Chesterton sales representative.

© 2021 A.W. Chesterton Company.  
® Registered trademark owned by A.W. Chesterton Company  
in USA and other countries, unless otherwise noted.



A.W. Chesterton Company  
860 Salem Street  
Groveland, MA 01834 USA

Telephone: 781-438-7000  
Fax: 978-469-6528  
[chesterton.com](http://chesterton.com)

Form No. EN24651  
Core Products Catalog – English  
12/21