

SALES & ENGINEERING DATA


RATIO SERIES: **1:1**

FLUID P.S.I. RANGE: **20 - 120**

66615X-XXX-C THRU 66618X-XXX-C 1-1/2" METALLIC DIAPHRAGM PUMP

RELEASED: 1-10-97
REVISED: 6-7-10
(REV. 06) S-879

DIMENSIONAL DATA

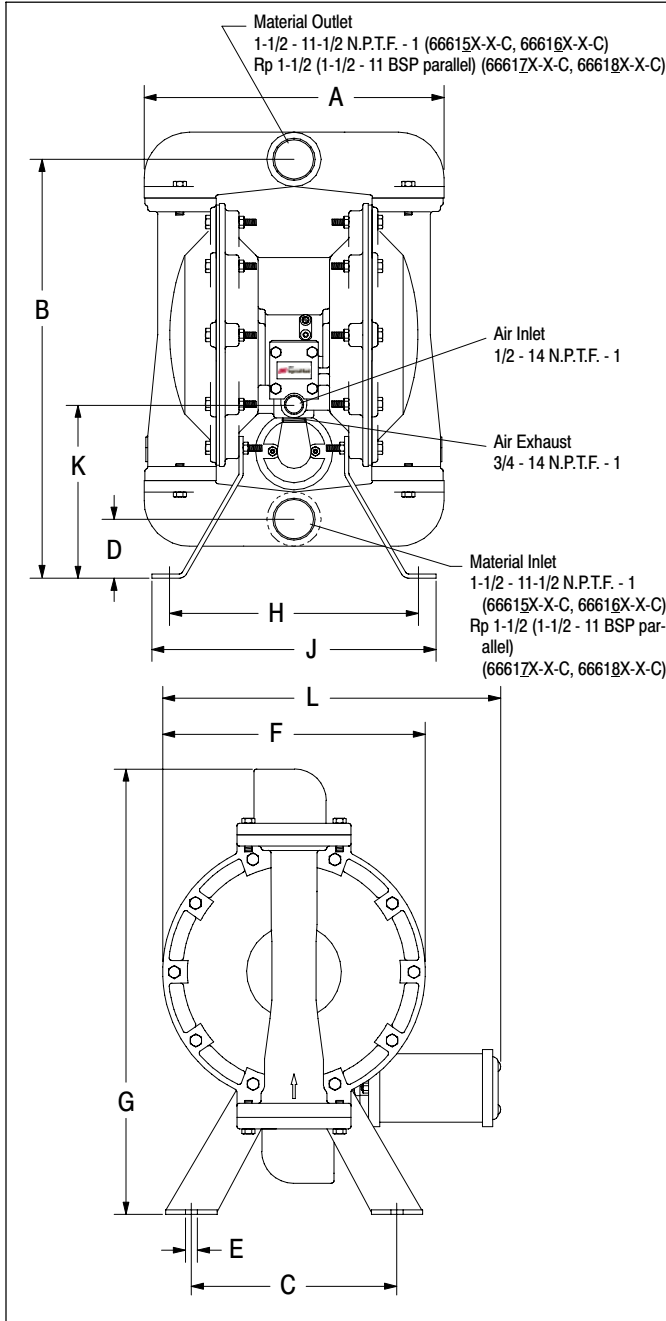

DIMENSIONS

A	13-1/8" (333 mm)	E	1/2" (14 mm)	J	12-3/4" (324 mm)
B	18-3/8" (467 mm)	F	11-1/2" (292 mm)	K	7-5/8" (194 mm)
C	9" (229 mm)	G	19-5/8" (498 mm)	L	14-13/16" (376 mm)
D	2-3/4" (70 mm)	H	11-3/4" (298 mm)		

NOTE: Dimensions are shown in inches and (mm), supplied for reference only and are typically rounded up to the nearest 1/16 inch.

SPECIFICATIONS

CONSTRUCTION

Model Series 66615X-XXX-C thru 66618X-XXX-C
Pump Type Metallic, Air Operated, Double Diaphragm
Ratio 1:1
Material Inlet / Outlet (female)
 66615X-X-C and 66616X-X-C . 1-1/2 - 11-1/2 N.P.T.F. - 1
 66617X-X-C and 66618X-X-C . Rp 1-1/2 (1-1/2 - 11 BSP parallel)
Air Inlet (female) 1/2 - 14 N.P.T.F. - 1
Air Exhaust (female) 3/4 - 14 N.P.T.F. - 1
Weight Aluminum 51.54 lbs (23.4 kgs)
 Cast Iron 79.54 lbs (36.1 kgs)
 Stainless Steel 84.54 lbs (38.3 kgs)
 (add 23 lbs (10.4 kgs) for cast iron air motor section)
Air Section Service Kit 637118-C
Fluid Section Service Kit 637124-XX

66615X - X X X - C

637124 - X X

Diaphragm Material
Ball Material

EXAMPLE: Model 666150-361-C
Fluid Section Service Kit is 637124-61

PERFORMANCE

Air Inlet Pressure Range 20 - 120 p.s.i. (1.4 - 8.3 bar)
Maximum Material Inlet Pressure ... 10 p.s.i. (0.69 bar)
Fluid Pressure Range 20 - 120 p.s.i. (1.4 - 8.3 bar)
Maximum Flow Rate (flooded inlet) 90 g.p.m. (340.7 l.p.m.)
Maximum Particle Size 1/4" dia. (6.4 mm)
Maximum Temperature Limits (diaphragm / ball / seat material)
 Acetal 10° to 180° F (-12° to 82° C)
 E.P.R. -60° to 280° F (-51° to 138° C)
 Hytrel -20° to 150° F (-29° to 66° C)
 Neoprene 0° to 200° F (-18° to 93° C)
 Nitrile 10° to 180° F (-12° to 82° C)
 Polypropylene 35° to 150° F (2° to 66° C)
 Polyurethane 10° to 150° F (-12° to 66° C)
 PVDF (Kynar) 10° to 200° F (-12° to 93° C)
 PTFE 40° to 225° F (4° to 107° C)
 Santoprene -40° to 225° F (-40° to 107° C)
 Viton -40° to 350° F (-40° to 177° C)
Displacement / Cycle @ 100 p.s.i. . . . 0.64 gal. (2.42 lit.)
Noise Level @ 70 p.s.i. - 60 c.p.m.① . . . 77.7 db(A)②

① Tested with 93139 muffler installed.

② The pump sound pressure level has been updated to an Equivalent Continuous Sound Level (L_{Aeq}) to meet the intent of ANSI S1. 13-1971, CAGI-PNEUROPS S5.1 using four microphone locations.

ACCESSORIES:

65010 Neoprene "O" Ring Air Motor Kit
 65764 Viton "O" Ring Air Motor Kit
 66084-1 Air Line Connection Kit
 637155 Abrasion Resistant Conversion Kit

INGERSOLL RAND COMPANY LTD

209 NORTH MAIN STREET - BRYAN, OHIO 43506

① (800) 495-0276 • FAX(800) 892-6276

www.ingersollrandproducts.com

© 2010

CCN 15260219

ARO

IR Ingersoll Rand
Industrial Technologies

PERFORMANCE CURVES

6661XX-XXX-C 1-1/2" METALLIC DIAPHRAGM PUMP

