

Dripmaster EDD4B/4BS

VTP Oil Lubrication Control & Monitoring Device

- Maintains constant oil drip rate
- Provides report back facilities to SCADA room
- Automatic pump shutdown
- Reduces pump maintenance costs
- Reduces well contamination

The only oil lubrication device designed for Vertical Turbine Pumps



Dripmaster

Company Profile

Whitewater Well is a subsidiary of the Whitewater Technology Group. With more than 30 years of experience in the development, manufacturing and marketing of control & monitoring instrumentation for the water market, our products are tailored towards increasing reliability of well operations, reducing well maintenance costs and preventing well contamination.

Lineshaft Oil Lubrication


Optimal lineshaft lubrication is an essential issue when considering effective operation of the VTP. Bearing failure is a major cause of pump downtime. Approximately 50% of all bearing failures are due to improper lubrication. Lineshaft repairs are very costly and time consuming. Correct lubrication doses also reduce well contamination considerably.

The Dripmaster

Is an active vertical lineshaft lubrication control and monitoring device. It automatically stabilizes the oil drip rate so as to comply to pump manufacturer's requirements.

Main Features


- Maintains constant preset oil drip rate in both normal mode (pump in operation) and stand-by mode (pump Idle).
- Automatic switching between normal and standby modes.
- Continuously controls the preset drip rate (55 times an hour, 1320 times a day).
- Constant drip rate is maintained regardless of ambient temperature and hydrostatic oil pressure in oil tank.
- Provides accurate oil consumption data (oil level in tank)
- Gravity based oil flow.
- SCADA compatible report- back mechanism.
- Manual operation mechanism using built-in peephole
- Operates under extreme weather conditions - housed in rugged sealed cast aluminum case.



Needle Valve Dripper




Dripmaster

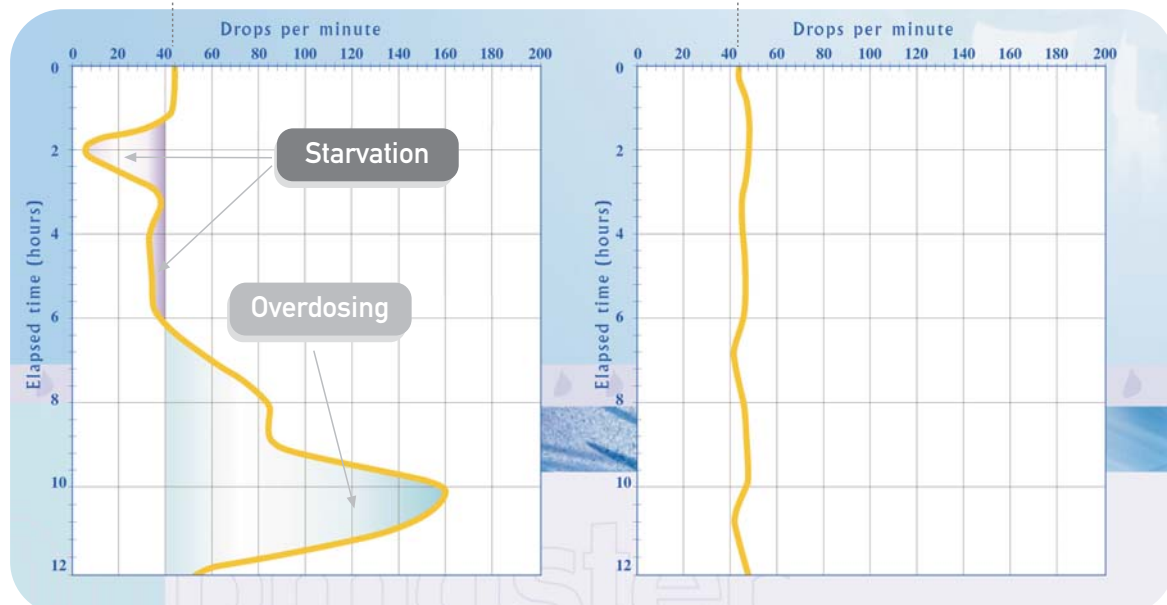


Dripmaster Location

Installed below the oil tank and above the inlet to the shaft.

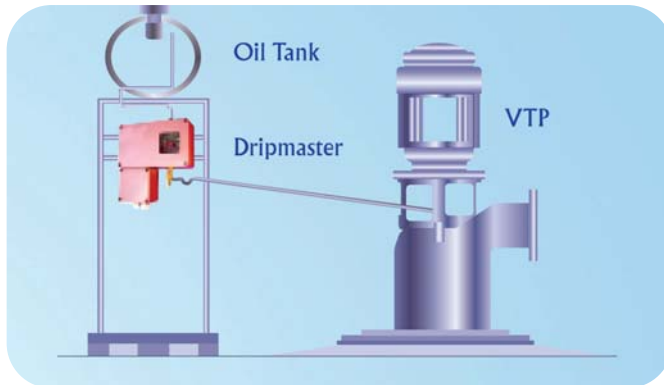

SCADA Interface

- Drip rate count
- Lack of oil warning
- Automatic pump shutdown

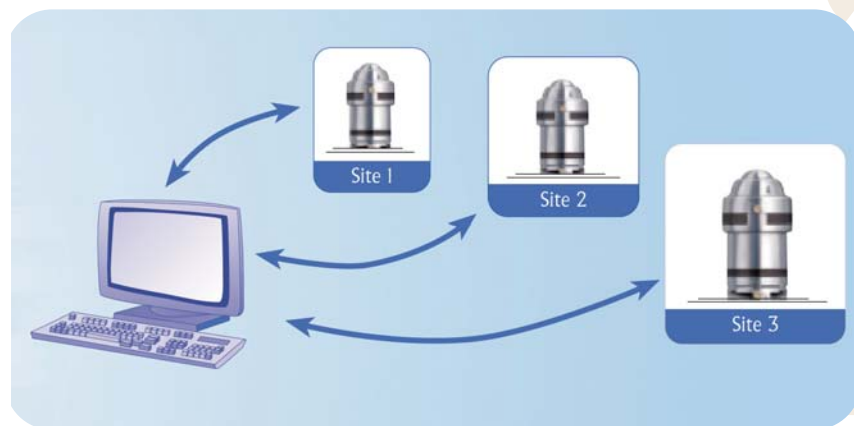

Why use the Dripmaster?

- Prolongs the life span of lineshaft bearings, thus preventing expensive repairs and loss of service (pump down time).
- Eliminates the need for a secondary “slow drip” lubrication system when pump is shut down.
- Reduces well contamination caused by excessive lubrication (decreases oil consumption).
- Reduces labor-intensive operations (checking oil levels and adjusting drip rates at each well site).
- Compact device which is easy to install.
- Maintenance-free operation.
- Low price - outlay quickly repaid.

Dripmaster

Dripmaster EDD4B/4BS Specification

Power Requirements	115 VAC, 10 VA or 24 V AC/DC
Normal mode preset drip rates	20, 30, 40, 50, 60 dpm
Stand-by mode preset drip rates	0, 10, 20, 30 dpm
Drop volume	50 drops per 1 cc
PULSE relay contact	35 VDC - 0.5 A
O.K. relay contact	250 VAC - 10 A ACI; 110 VAC - 10 A ACI; 110 VDC - 0.3 A; 30 VDC - 10 A
L.L. relay contact	125 VAC - 0.5 A 110 VDC - 0.2 A 24 VDC - 1 A
S.B. (Normal/Stand-by mode control)	24 V AC/DC
Duty Cycle	60 secs count 6 secs freeze
Drip stabilizing tolerance	From x to x+3 dpm (where x is the preselected drip rate)
Oil on/off solenoid (EDD-4BS only)	115 VAC, 60 Hz, 24 V AC/DC (optional)
Oil inlet/outlet	Male thread 1/4" BSP
Dimensions (whd)	10.35x11.3x3.6 inches (263x287x91 mm)
Weight	9 lbs (4.1 kg)

All specifications shown in this brochure are subject to change

U.S Pat. No 5,996,739 & other contries



USA Office: Whitewater Well, 2757 W. Jarlath Ave. Chicago, IL 60645
Tel: 312-218-8997, Fax: 773-761-5753, E-mail: alant@w-water.com
Corporate Office: Whitewater Well Ltd., 1 Azrieli Center, Tel Aviv 67021, Israel
Tel: +972-3-923-2567, Fax: +972-3-923-2575, E-mail: info@w-water.com
www.w-water.com