

Power Prime™ PUMPS



Model DV-300i

Standard Features

- Hot Dip Galvanized Trailers and Skids
 - Radiator Enclosure
 - Battery Box
 - Wheels
- Emissions Certified Engines
 - Perkins and John Deere
- Locking Battery Box

Pump Features

- Solids handling capabilities to 3-½" diameter maximum
- Continuous self priming
- Runs dry unattended
- Suction lift to 28ft.
- Skid mounted

Size 12" x 12"




Technical

- The DV-300 is pedestal-mounted and flex-coupled to a diesel fueled engine.
- 12 volt, electric start with control panel
- Skid- or trailer-mounted with optional lifting bale
- 24-hour minimum capacity fuel tank
- Compressor/Venturi automatic priming system
- Electric drive option available
- Sound attenuated option available

Material Specifications

- Standard build is 316 stainless steel open impellers and replaceable wear plates.
- Pump shaft is 431 stainless steel. All other major pump components are spheroidal graphite iron.
- Mechanical Seal
 - Solid silicon carbide mating faces
 - Oil-bath lubrication for dry running
- Suction / discharge flanges ANSI 150# FF.

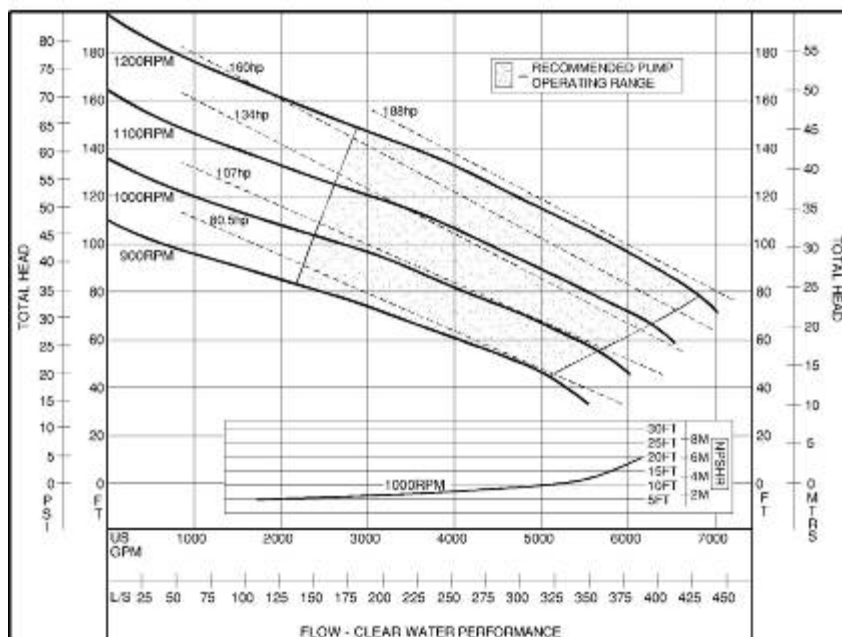

POWER PRIME™ PUMPS

P.O. Box 2248
Bakersfield CA 93303
800 647-7246
661-399-9058
FAX 661•399-3374
www.powerprime.com
sales @ powerprime.com

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.