

## Model HH-125c

### Standard Features

- Hot Dip Galvanized Trailers and Skids
  - Radiator Enclosure
  - Battery Box
  - Wheels
- Zinc Plated Jacks
- Emissions Certified Engines
  - Perkins and John Deere
- DOT LED lights
- Electric Brakes with Safety breakaway
- Locking Battery Box

### Pump Features

- Solids-handling capabilities to 3" diameter maximum
- Continuous self-priming
- Runs dry unattended
- Suction lift up to 28 ft.
- Skid- or trailer-mounted
- Auto-start-capable control panel

### Technical


- SAE-mounted
- Flex coupled to various diesel engines
- 12 volt, electric start with control panel
- Skid or trailer-mounted with optional lifting bale
- 24-hour minimum capacity fuel tank
- Compressor/Venturi automatic priming system
- Electric drive option available
- Sound attenuated option available



**Size 6" x 4"**

### Material Specifications

- Standard Build – ASTM A48 CLASS 30 Gray Iron volute Semi-open 2 port nonclog impeller and replaceable wear rings
- Pump Shaft  
SAE 1144 stress proof metal
- Mechanical Seal  
Tungsten carbide vs. silicon carbide mating faces  
Oil-bath lubrication for dry running
- Suction / discharge flanges ANSI 150# FF

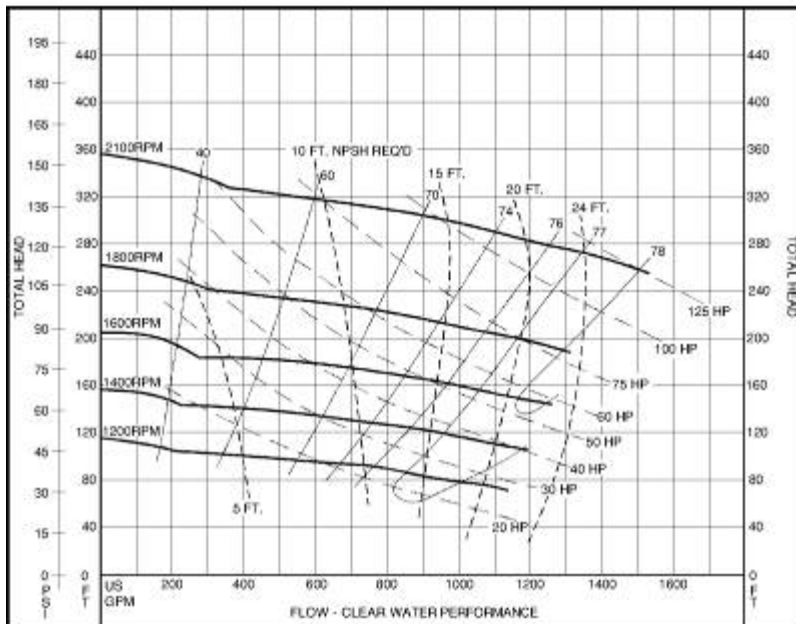

### POWER PRIME™ PUMPS

P.O. Box 2248  
 Bakersfield CA 93303  
 800 647-7246  
 661-399-9058  
 FAX 661-399-3374  
[www.powerprime.com](http://www.powerprime.com)  
 sales @ powerprime.com

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.