

Model HH-080

Standard Features

- Hot Dip Galvanized Trailers and Skids
 - Radiator Enclosure
 - Battery Box
 - Wheels
- Zinc Plated Jacks
- Emissions Certified Engines
 - Perkins/Cat
- DOT LED lights
- Electric Brakes with Safety breakaway
- Locking Battery Box

Pump Features

- Solids handling capabilities to 1" diameter maximum
- Continuous self priming
- Runs dry unattended
- Suction lift to 28' ft.
- Auto-start-capable control panel
- Skid or trailer mounted
- Stainless Steel, CD4MCu and Chrome pump Options

Technical


- SAE-mounted
- Flex coupled to various diesel engines
- 12 volt, electric start with control panel
- Skid- or trailer-mounted with optional lifting bale
- 24-hour minimum capacity fuel tank
- Compressor/Venturi automatic priming system
- Electric drive option available
- Sound attenuated option available

Material Specifications

- Standard Build - Spheroidal Graphite Cast Iron volute
Stainless Steel or Chromium Steel open impellers and replaceable wear plates
- Pump Shaft
431 Stainless Steel
- Mechanical Seal
Solid silicon carbide mating faces
Oil-bath lubrication for dry running
- Suction / discharge flanges ANSI 150# FF.



SIZE 3" x 3"

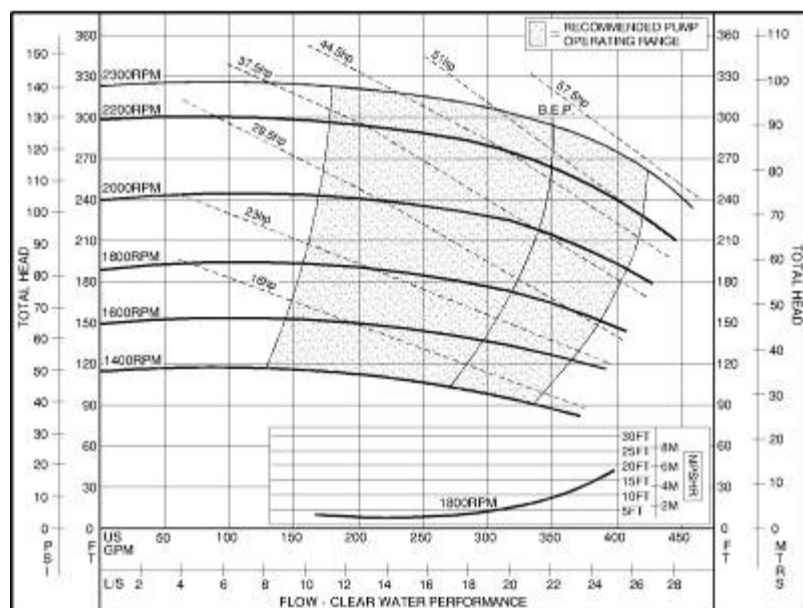

POWER PRIME™ PUMPS

P.O. Box 2248
Bakersfield CA 93303
800 647-7246
661-399-9058
FAX 661-399-3374
www.powerprime.com
sales @ powerprime.com

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.