

Power Prime™ PUMPS



Model XH-150

Size 8" x 6"

Standard Features

- Hot Dip Galvanized Skids
 - Radiator Enclosure
 - Locking Battery Boxes
- Emissions Certified Cat Engine

Pump Features

- Solids handling capabilities to 1 3/4" diameter maximum
- Continuous self priming
- Runs dry unattended
- Suction lift to 28'
- Skid mounted
- Stainless Steel Construction

Technical


- The XH-150 is pedestal-mounted and flex-coupled to a diesel fueled engine.
- 12 volt, electric start with auto start control panel
- Skid-mounted with optional lifting bale
- Over night capacity fuel tank
- Pre-plumbed for nurse tank
- Compressor/Venturi automatic priming system
- Electric drive option available

Material Specifications

- Standard Build - Stainless Steel with 5 blade closed impeller and replaceable wear plates
- Pump Shaft
431 Stainless Steel



- Mechanical Seal
Cartridge type mechanical seal with stainless steel metallic parts, with viton elastomers and silicon carbide faces.
Oil-bath lubrication for dry running
- Suction / discharge flanges ANSI 300# FF

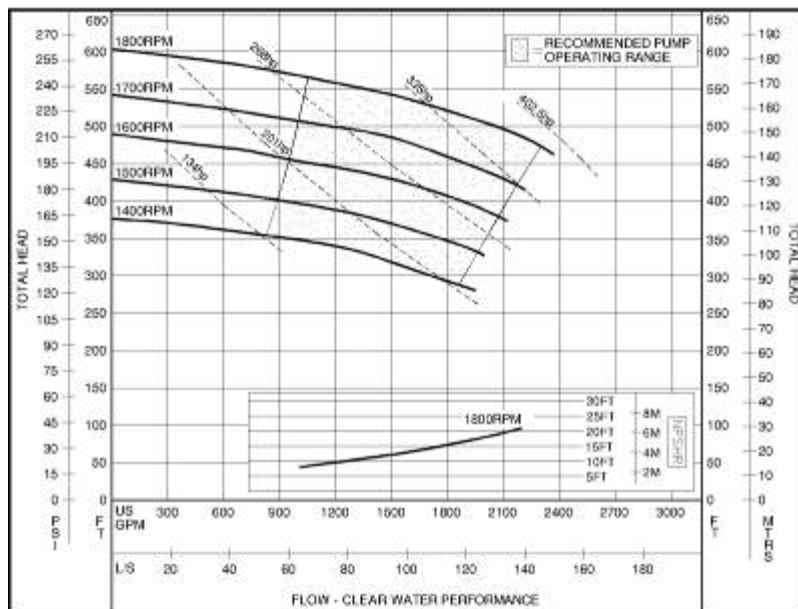

POWER PRIME™ PUMPS

P.O. Box 2248
Bakersfield CA 93303
800 647-7246
661-399-9058
FAX 661-399-3374
www.powerprime.com
sales @ powerprime.com

Power Prime™ is a registered trademark of Western Oilfields Supply Company. Features and Specifications are subject to change without notice.